



BALL & SOCKET
HOT ROLLED / MULTI-USE




PilePro® Sheet Pile Connectors




PZ 90




Colt




Cobra




PZ Tee



Joker



Bullhead



PZT-S

Sheet Pile LLC is the owner and assignee of US 7,390,145, related to these connectors.




Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant



BALL & SOCKET
HOT ROLLED / MULTI-USE




Configuration B1 (PZC 13)

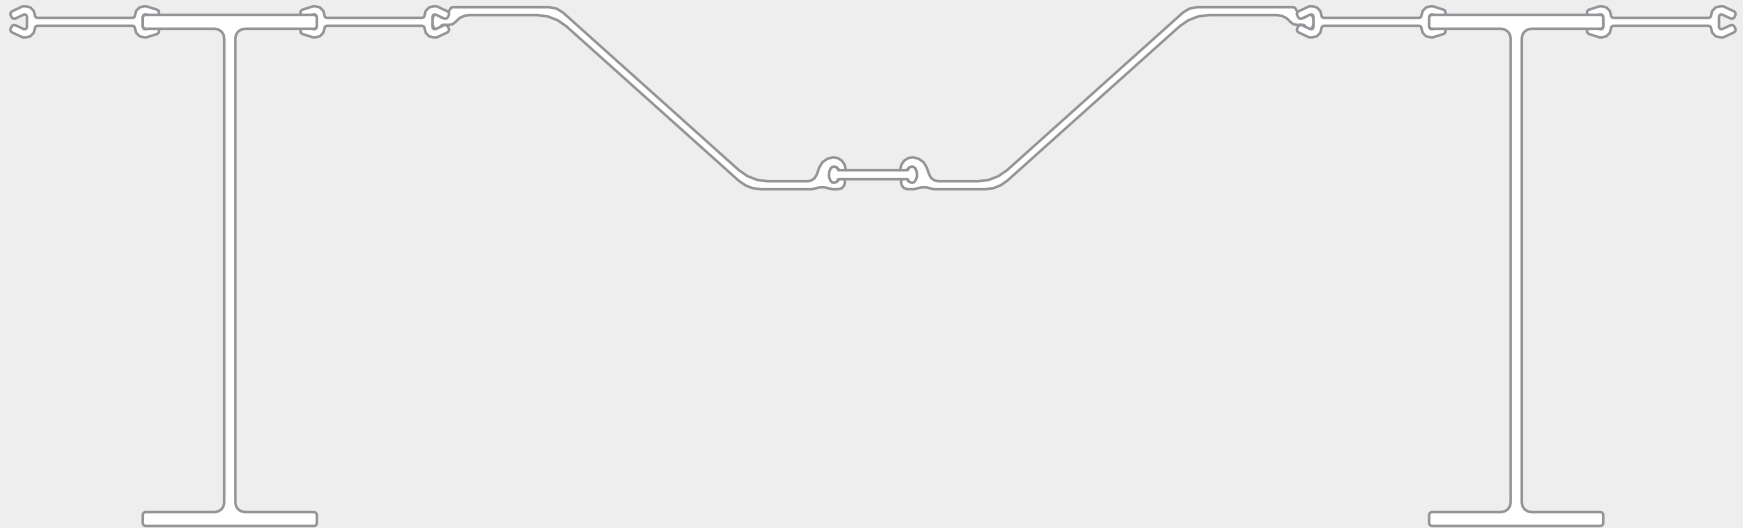

SECTION NAME:

79 - 2045



Section width in mm

Section modulus (elastic) in $\text{cm}^3/\text{m} \div 100$

These are examples from a large variety of possible IZ[®] solutions.

Please configure your own system on sheet-pile.com/iz

*WOF[®] and WOM[®] are available in a wide range of sizes — 100% melted and manufactured in the USA and BABA 2021 compliant.
Sheet Pile LLC is the owner and assignee of numerous patents and IP, that may be related to this sheet pile solution.*



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
27-2369	IZ®	50.3	93.3	23.2	27.1	31	289.1	23.56	W14X90	B1 (PZC 13)
		2705	2369	113.4	132.4	151.3	39481.7	7.18	W360X134	
27-2310	IZ®	50.8	90.9	25.9	29.9	33.9	283.8	22.55	W12X106	B1 (PZC 13)
		2730.1	2310	126.5	145.9	165.3	38751.7	6.87	W310X158	
27-2375	IZ®	50.9	93.5	24.7	28.6	32.5	295.5	23.56	HP14x102	B1 (PZC 13)
		2737.6	2374.6	120.8	139.7	158.6	40359.4	7.18	HP360x152	
28-2398	IZ®	51.2	94.4	22.6	26.5	30.3	305.7	24.12	HP16x88	B1 (PZC 13)
		2752.5	2398.5	110.5	129.2	147.9	41752.6	7.35	HP410x131	
28-2260	IZ®	51.6	89	21.4	25.4	29.5	308.8	22.51	W16X67	B1 (PZC 13)
		2776.7	2260	104.3	124.1	144	42175.4	6.86	W410X100	
28-2191	IZ®	51.9	86.3	20.3	24.5	28.7	315.5	21.89	W18X55	B1 (PZC 13)
		2788.5	2191	99	119.5	139.9	43088.2	6.67	W460X82	
28-2370	IZ®	52.3	93.3	24.4	28.2	32.1	304.5	23.6	W14X99	B1 (PZC 13)
		2811.1	2370	119	137.9	156.8	41576.9	7.19	W360X147	
28-2165	IZ®	52.4	85.2	18.9	23.2	27.4	325.2	21.99	W21X44	B1 (PZC 13)
		2819.1	2165	92.5	113.2	133.9	44411	6.7	W530X66	
29-2313	IZ®	53.3	91.1	27.8	31.7	35.7	303.1	22.61	W12X120	B1 (PZC 13)
		2865.9	2313	135.5	154.9	174.3	41386.2	6.89	W310X179	
29-2192	IZ®	53.6	86.3	20.9	25.1	29.3	330.6	21.92	W18X60	B1 (PZC 13)
		2882	2192	102.2	122.6	143.1	45146.7	6.68	W460X89	
29-2207	IZ®	53.7	86.9	19.1	23.3	27.4	337.3	22.55	W21X48	B1 (PZC 13)
		2888	2207	93.4	113.7	134	46065.2	6.87	W530X72	
29-2378	IZ®	53.9	93.6	26.6	30.5	34.3	318.6	23.63	HP14x117	B1 (PZC 13)
		2898.6	2377.8	129.8	148.7	167.5	43512.5	7.2	HP360x174	
29-2261	IZ®	54.4	89	22.7	26.8	30.8	332.5	22.55	W16X77	B1 (PZC 13)
		2926.4	2261	110.9	130.7	150.5	45412.5	6.87	W410X114	
29-2400	IZ®	54.5	94.5	24.4	28.2	32	332.1	24.19	HP16x101	B1 (PZC 13)
		2927.6	2400	119.1	137.8	156.5	45349.6	7.37	HP410x151	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
29-2371	IZ®	54.6	93.3	25.7	29.5	33.4	322.4	23.63	W14X109	B1 (PZC 13)
		2935.5	2371	125.3	144.2	163.1	44026.1	7.2	W360X162	
30-2166	IZ®	55.2	85.3	19.8	24	28.2	350.4	22.02	W21X50	B1 (PZC 13)
		2969.6	2166	96.5	117.2	137.9	47847.2	6.71	W530X74	
30-2193	IZ®	55.3	86.3	21.6	25.8	30	345.4	21.96	W18X65	B1 (PZC 13)
		2970.8	2193	105.4	125.8	146.2	47162.2	6.69	W460X97	
30-2315	IZ®	56.4	91.1	29.8	33.8	37.7	327.4	22.68	W12X136	B1 (PZC 13)
		3031.1	2315	145.6	164.9	184.3	44715.8	6.91	W310X202	
31-2373	IZ®	57	93.4	27.1	30.9	34.8	341.2	23.66	W14X120	B1 (PZC 13)
		3062.1	2373	132.1	151	169.9	46598.2	7.21	W360X179	
31-2194	IZ®	57	86.4	22.4	26.6	30.8	362.3	21.99	W18X71	B1 (PZC 13)
		3066.7	2194	109.6	130	150.5	49482	6.7	W460X106	
31-2209	IZ®	57.2	87	20.1	24.3	28.4	368.6	22.58	W21X55	B1 (PZC 13)
		3075.3	2209	98.2	118.5	138.8	50331.7	6.88	W530X82	
31-2263	IZ®	57.8	89.1	24.3	28.4	32.4	361.4	22.61	W16X89	B1 (PZC 13)
		3106.3	2263	118.7	138.6	158.4	49353	6.89	W410X132	
31-2280	IZ®	58	89.8	22.2	26.3	30.3	369.8	23.07	W18X76	B1 (PZC 13)
		3119.2	2280	108.6	128.2	147.9	50493.4	7.03	W460X113	
32-2166	IZ®	58.8	85.3	20.7	25	29.2	382.9	22.05	W21X57	B1 (PZC 13)
		3161.2	2166	101.2	121.9	142.6	52283	6.72	W530X85	
32-2403	IZ®	59.2	94.6	26.9	30.7	34.6	372.7	24.25	HP16x121	B1 (PZC 13)
		3182.7	2403.2	131.4	150.1	168.7	50901.8	7.39	HP410x181	
32-2374	IZ®	59.6	93.5	28.5	32.4	36.3	362.4	23.69	W14X132	B1 (PZC 13)
		3205.3	2374	139.3	158.2	177.1	49495.2	7.22	W360X196	
32-2317	IZ®	59.7	91.2	31.9	35.9	39.9	353.8	22.74	W12X152	B1 (PZC 13)
		3209.3	2317	156	175.3	194.6	48307.8	6.93	W310X226	
33-2209	IZ®	60.7	87	21.1	25.2	29.4	400.5	22.61	W21X62	B1 (PZC 13)
		3263.1	2209	102.8	123.1	143.4	54697.8	6.89	W530X92	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
33-2265	IZ®	61	89.2	25.8	29.8	33.9	390.1	22.64	W16X100	B1 (PZC 13)
		3279.5	2265	125.9	145.7	165.5	53273.3	6.9	W410X149	
33-2282	IZ®	61.3	89.8	23.6	27.6	31.6	399.7	23.14	W18X86	B1 (PZC 13)
		3296.6	2282	115	134.6	154.3	54577.4	7.05	W460X128	
34-2394	IZ®	62.3	94.3	30	33.8	37.6	383.9	23.96	W14X145	B1 (PZC 13)
		3348.1	2394	146.3	165.1	183.8	52419.3	7.3	W360X216	
34-2319	IZ®	63.4	91.3	34.3	38.2	42.2	384	22.81	W12X170	B1 (PZC 13)
		3405.9	2319	167.3	186.7	206	52437.7	6.95	W310X253	
34-2178	IZ®	63.4	85.7	20.4	24.6	28.8	432.1	22.64	W24X55	B1 (PZC 13)
		3407	2178	99.6	120.2	140.8	59013	6.9	W610X82	
34-2210	IZ®	63.4	87	21.8	26	30.2	426.4	22.64	W21X68	B1 (PZC 13)
		3407.4	2210	106.7	127	147.2	58223.8	6.9	W530X101	
34-2406	IZ®	63.7	94.7	29.4	33.2	37.1	410.8	24.28	HP16x141	B1 (PZC 13)
		3426.3	2406.4	143.6	162.3	180.9	56102.9	7.4	HP410x211	
35-2283	IZ®	64.9	89.9	25	29	33.1	433.6	23.17	W18X97	B1 (PZC 13)
		3491.7	2283	122.2	141.8	161.4	59209.8	7.06	W460X144	
35-2395	IZ®	65.4	94.3	31.8	35.6	39.4	410	23.99	W14X159	B1 (PZC 13)
		3515.4	2395	155.1	173.9	192.6	55988.8	7.31	W360X237	
35-2211	IZ®	65.4	87	22.6	26.7	30.9	446.7	22.68	W21X73	B1 (PZC 13)
		3515.8	2211	110.2	130.4	150.7	61000.1	6.91	W530X109	
36-2179	IZ®	67.1	85.8	21.3	25.6	29.8	469.5	22.68	W24X62	B1 (PZC 13)
		3605	2179	104.2	124.8	145.4	64119.9	6.91	W610X92	
36-2322	IZ®	67.4	91.4	36.8	40.7	44.7	418.7	22.87	W12X190	B1 (PZC 13)
		3622.5	2322	179.6	198.9	218.2	57179.6	6.97	W310X283	
36-2451	IZ®	67.5	96.5	28.1	31.9	35.6	457.6	25.14	HP18x135	B1 (PZC 13)
		3628.2	2450.8	137.3	155.6	173.9	62482.9	7.66	HP360x202	
36-2284	IZ®	67.6	89.9	26.2	30.2	34.2	459.5	23.2	W18X106	B1 (PZC 13)
		3633	2284	128	147.6	167.2	62749.6	7.07	W460X158	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
37-2410	IZ®	68.7	94.9	32	35.8	39.6	455.1	24.38	HP16x162	B1 (PZC 13)
		3693.6	2409.6	156.1	174.7	193.3	62153.8	7.43	HP410x242	
37-2398	IZ®	69.1	94.4	33.9	37.7	41.5	442.7	24.06	W14X176	B1 (PZC 13)
		3715	2398	165.4	184.1	202.8	60458.8	7.33	W360X262	
37-2212	IZ®	69.2	87.1	23.9	28	32.2	486	22.71	W21X83	B1 (PZC 13)
		3722.1	2212	116.5	136.8	157	66361.6	6.92	W530X123	
38-2228	IZ®	70.2	87.7	21.7	25.8	29.9	500.7	23.33	W24X68	B1 (PZC 13)
		3775	2228	105.8	125.9	146	68381.5	7.11	W610X101	
38-2325	IZ®	71.4	91.5	39.4	43.4	47.3	455	22.97	W12X210	B1 (PZC 13)
		3838.4	2325	192.6	211.8	231.1	62134.6	7	W310X313	
39-2286	IZ®	71.9	90	27.9	32	36	501.9	23.23	W18X119	B1 (PZC 13)
		3867.3	2286	136.4	156	175.7	68541.8	7.08	W460X177	
39-2454	IZ®	72.9	96.6	30.8	34.5	38.2	507.9	25.2	HP18x157	B1 (PZC 13)
		3918.6	2454	150.1	168.4	186.7	69354.4	7.68	HP360x234	
39-2214	IZ®	73	87.2	25.2	29.4	33.5	526.2	22.74	W21X93	B1 (PZC 13)
		3924.3	2214	123.1	143.4	163.6	71855.9	6.93	W530X138	
39-2399	IZ®	73.2	94.4	36	39.8	43.7	478.4	24.12	W14X193	B1 (PZC 13)
		3936.9	2399	175.8	194.5	213.2	65329.1	7.35	W360X287	
39-2419	IZ®	73.3	95.2	34.6	38.4	42.2	497.7	24.51	HP16x183	B1 (PZC 13)
		3942.2	2419.1	168.9	187.4	205.9	67961.7	7.47	HP410x272	
40-2228	IZ®	74.7	87.7	22.8	26.9	31	547.5	23.37	W24X76	B1 (PZC 13)
		4016	2228	111.1	131.2	151.3	74772.6	7.12	W610X113	
41-2312	IZ®	75.8	91	25.3	29.2	33.2	551.7	24.02	W21X101	B1 (PZC 13)
		4073	2312	123.4	142.7	162.1	75334.5	7.32	W530X150	
41-2328	IZ®	75.9	91.7	42	46	49.9	494.6	23.04	W12X230	B1 (PZC 13)
		4078.5	2328	205.1	224.4	243.6	67547.3	7.02	W310X342	
41-2283	IZ®	76.1	89.9	29.5	33.5	37.5	543.6	23.27	W18X130	B1 (PZC 13)
		4093	2283	143.8	163.5	183.1	74236.5	7.09	W460X193	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
42-2401	IZ®	77.3	94.5	38.3	42.1	45.9	515.2	24.15	W14X211	B1 (PZC 13)
		4158.4	2401	186.8	205.5	224.1	70361.7	7.36	W360X314	
42-2229	IZ®	78.9	87.8	23.8	27.9	32.1	592.8	23.4	W24X84	B1 (PZC 13)
		4240.9	2229	116.3	136.4	156.5	80948.1	7.13	W610X125	
43-2313	IZ®	79.2	91.1	26.6	30.5	34.5	589.1	24.06	W21X111	B1 (PZC 13)
		4258.5	2313	129.8	149.1	168.5	80446	7.33	W530X165	
43-2457	IZ®	79.3	96.7	33.7	37.4	41.1	568.9	25.27	HP18x181	B1 (PZC 13)
		4264.1	2457.2	164.4	182.6	200.9	77688	7.7	HP360x269	
43-2330	IZ®	80.2	91.7	44.8	48.7	52.7	536.1	23.1	W12X252	B1 (PZC 13)
		4311.4	2330	218.8	238	257.2	73205.9	7.04	W310X375	
43-2285	IZ®	80.5	90	31.1	35.1	39.2	587.7	23.3	W18X143	B1 (PZC 13)
		4325.3	2285	152	171.6	191.2	80259	7.1	W460X213	
44-2404	IZ®	82.3	94.6	41	44.8	48.7	561.5	24.25	W14X233	B1 (PZC 13)
		4422.5	2404	200.3	218.9	237.6	76680	7.39	W360X347	
45-2315	IZ®	83.3	91.1	27.9	31.9	35.9	633.8	24.09	W21X122	B1 (PZC 13)
		4478.1	2315	136.4	155.8	175.1	86554.1	7.34	W530X182	
45-2230	IZ®	83.7	87.8	25.3	29.4	33.5	648.4	23.43	W24X94	B1 (PZC 13)
		4499.5	2230	123.3	143.4	163.5	88548.3	7.14	W610X140	
46-2287	IZ®	84.9	90	33.1	37.1	41.1	635.5	23.37	W18X158	B1 (PZC 13)
		4566.4	2287	161.4	181	200.6	86788.7	7.12	W460X235	
46-2460	IZ®	85.5	96.9	36.6	40.3	44	632.2	25.33	HP18x204	B1 (PZC 13)
		4597.8	2460.4	178.6	196.8	215	86331.6	7.72	HP460x304	
46-2334	IZ®	86.2	91.9	48.2	52.1	56	594.5	23.2	W12X279	B1 (PZC 13)
		4631.7	2334	235.2	254.4	273.6	81180.3	7.07	W310X415	
46-2324	IZ®	86.2	91.5	25.5	29.5	33.5	679	24.61	W24X104	B1 (PZC 13)
		4636.9	2324	124.7	144	163.3	92717.7	7.5	W610X155	
47-2253	IZ®	86.8	88.7	23.6	27.7	31.8	693.3	24.12	W27X84	B1 (PZC 13)
		4664.3	2253	115.4	135.3	155.2	94679.1	7.35	W690X125	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
47-2316	IZ®	87	91.2	29.2	33.2	37.2	674.1	24.12	W21X132	B1 (PZC 13)
		4675.4	2316	142.8	162.2	181.5	92059.2	7.35	W530X196	
47-2406	IZ®	87.7	94.7	44.1	47.9	51.7	614.8	24.32	W14X257	B1 (PZC 13)
		4716.6	2406	215.1	233.7	252.4	83961.6	7.41	W360X382	
48-2229	IZ®	88.4	87.8	26.4	30.5	34.7	702	23.43	W24X103	B1 (PZC 13)
		4751.7	2229	129	149.1	169.2	95857.6	7.14	W610X153	
49-2289	IZ®	90.7	90.1	35.3	39.3	43.3	697.8	23.43	W18X175	B1 (PZC 13)
		4878.4	2289	172.3	191.8	211.4	95297.5	7.14	W460X260	
50-2325	IZ®	92.1	91.5	27.2	31.1	35.1	746.9	24.65	W24X117	B1 (PZC 13)
		4950.4	2325	132.8	152.1	171.4	101998.7	7.51	W610X174	
50-2336	IZ®	92.3	92	51.6	55.5	59.4	657	23.3	W12X305	B1 (PZC 13)
		4962.1	2336	251.8	271	290.2	89718.2	7.1	W310X454	
50-2318	IZ®	92.4	91.3	31.2	35.2	39.2	736.9	24.19	W21X147	B1 (PZC 13)
		4969.4	2318	152.5	171.8	191.2	100629.4	7.37	W530X219	
50-2254	IZ®	93	88.7	24.9	29	33.1	766.5	24.19	W27X94	B1 (PZC 13)
		4997.9	2254	121.7	141.5	161.4	104666.7	7.37	W690X140	
51-2409	IZ®	94.1	94.8	47.3	51.1	54.9	677.3	24.38	W14X283	B1 (PZC 13)
		5061.7	2409	230.8	249.4	268	92497.5	7.43	W360X421	
53-2254	IZ®	97.9	88.7	26.1	30.1	34.2	827.3	24.22	W27X102	B1 (PZC 13)
		5263	2254	127.2	147.1	167	112970.9	7.38	W690X152	
53-2327	IZ®	98.2	91.6	29	33	36.9	822.2	24.71	W24X131	B1 (PZC 13)
		5281.4	2327	141.8	161.1	180.3	112277.7	7.53	W610X195	
53-2264	IZ®	99.1	89.1	24.2	28.3	32.3	856.4	24.74	W30X90	B1 (PZC 13)
		5330.5	2264	118.3	138.1	157.9	116954.5	7.54	W760X134	
53-2340	IZ®	99.2	92.1	55.5	59.5	63.4	729	23.4	W12X336	B1 (PZC 13)
		5333.6	2340	271.2	290.3	309.5	99554	7.13	W310X500	
54-2412	IZ®	100.5	95	50.7	54.6	58.4	743.7	24.48	W14X311	B1 (PZC 13)
		5404.8	2412	247.8	266.4	284.9	101561.1	7.46	W360X463	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
55-2315	IZ®	101.3	91.1	33.8	37.7	41.7	837.8	24.19	W21X166	B1 (PZC 13)
		5447.4	2315	164.9	184.3	203.6	114411	7.37	W530X248	
56-2256	IZ®	103.7	88.8	27.6	31.7	35.7	904	24.25	W27X114	B1 (PZC 13)
		5575.7	2256	134.8	154.6	174.5	123448.2	7.39	W690X170	
56-2265	IZ®	103.9	89.2	25.5	29.6	33.6	924.1	24.78	W30X99	B1 (PZC 13)
		5585.8	2265	124.5	144.3	164.1	126191.5	7.55	W760X147	
57-2328	IZ®	105.6	91.7	31	34.9	38.8	910.4	24.78	W24X146	B1 (PZC 13)
		5677.6	2328	151.2	170.4	189.7	124318.7	7.55	W610X217	
58-2318	IZ®	106.9	91.3	35.9	39.8	43.8	906.8	24.25	W21X182	B1 (PZC 13)
		5749.6	2318	175.2	194.5	213.9	123832.8	7.39	W530X272	
58-2416	IZ®	108	95.1	54.6	58.4	62.2	822.9	24.58	W14X342	B1 (PZC 13)
		5804.4	2416	266.5	285.1	303.6	112371	7.49	W360X509	
59-2266	IZ®	110	89.2	26.7	30.8	34.8	1005.2	24.81	W30X108	B1 (PZC 13)
		5912	2266	130.4	150.1	169.9	137265	7.56	W760X161	
60-2254	IZ®	112.4	88.7	29.6	33.7	37.8	1017.8	24.28	W27X129	B1 (PZC 13)
		6040.5	2254	144.6	164.5	184.4	138987.5	7.4	W690X192	
61-2329	IZ®	112.5	91.7	33.1	37	41	999.9	24.81	W24X162	B1 (PZC 13)
		6048.9	2329	161.6	180.8	200	136551.1	7.56	W610X241	
61-2319	IZ®	114	91.3	38.4	42.3	46.3	994.7	24.32	W21X201	B1 (PZC 13)
		6129.5	2319	187.3	206.6	226	135836.9	7.41	W530X300	
62-2418	IZ®	115.1	95.2	58.1	61.9	65.7	898.6	24.65	W14X370	B1 (PZC 13)
		6185.9	2418	283.5	302.1	320.6	122713.4	7.51	W360X551	
62-2267	IZ®	115.5	89.3	27.8	31.9	35.9	1081	24.84	W30X116	B1 (PZC 13)
		6210.4	2267	135.8	155.6	175.4	147615.5	7.57	W760X173	
64-2355	IZ®	118.6	92.7	30.7	34.6	38.5	1100	25.56	W27X146	B1 (PZC 13)
		6374.2	2355	149.8	168.8	187.8	150214.3	7.79	W690X217	
64-2327	IZ®	118.9	91.6	34.8	38.8	42.7	1082	24.81	W24X176	B1 (PZC 13)
		6394.3	2327	170.1	189.4	208.7	147752.6	7.56	W610X262	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
65-2267	IZ®	120.7	89.3	28.8	32.9	36.9	1152.4	24.88	W30X124	B1 (PZC 13)
		6490.9	2267	140.7	160.5	180.2	157370.2	7.58	W760X185	
65-2421	IZ®	121.7	95.3	61.5	65.3	69.1	974.8	24.71	W14X398	B1 (PZC 13)
		6542	2421	300.4	318.9	337.4	133121.2	7.53	W360X592	
67-2329	IZ®	125.1	91.7	36.9	40.8	44.8	1166.4	24.88	W24X192	B1 (PZC 13)
		6724.3	2329	180.1	199.3	218.6	159287.6	7.58	W610X285	
67-2268	IZ®	125.3	89.3	29.9	34	38	1221.1	24.91	W30X132	B1 (PZC 13)
		6735.5	2268	146.2	165.9	185.7	166754.5	7.59	W760X196	
68-2356	IZ®	125.6	92.8	32.6	36.5	40.4	1200.3	25.6	W27X161	B1 (PZC 13)
		6754	2356	159.4	178.4	197.4	163912.2	7.8	W690X240	
69-2292	IZ®	127.9	90.2	27.7	31.7	35.7	1281.9	25.66	W33X118	B1 (PZC 13)
		6876.2	2292	135.4	154.9	174.5	175054.6	7.82	W840X176	
69-2424	IZ®	128.9	95.4	65	68.7	72.5	1056.6	24.81	W14X426	B1 (PZC 13)
		6929.8	2424	317.1	335.6	354.1	144290.9	7.56	W360X634	
71-2330	IZ®	131.4	91.7	38.9	42.8	46.8	1254.1	24.91	W24X207	B1 (PZC 13)
		7067.1	2330	189.8	209	228.3	171256.7	7.59	W610X307	
71-2358	IZ®	132.9	92.8	34.8	38.7	42.6	1305.7	25.66	W27X178	B1 (PZC 13)
		7144.6	2358	169.9	188.9	207.9	178307.6	7.82	W690X265	
73-2428	IZ®	135.4	95.6	68.5	72.3	76.1	1135.1	24.91	W14X455	B1 (PZC 13)
		7278.3	2428	334.4	352.9	371.3	155011.1	7.59	W360X677	
73-2266	IZ®	135.7	89.2	32.1	36.1	40.2	1373.1	24.94	W30X148	B1 (PZC 13)
		7293.5	2266	156.7	176.5	196.3	187504.4	7.6	W760X220	
73-2292	IZ®	136.5	90.2	29.3	33.3	37.4	1412.2	25.7	W33X130	B1 (PZC 13)
		7338.7	2292	143.3	162.8	182.4	192844.5	7.83	W840X193	
75-2333	IZ®	140.1	91.9	41.7	45.7	49.6	1376.7	25.01	W24X229	B1 (PZC 13)
		7530.5	2333	203.7	222.9	242.1	188002.3	7.62	W610X341	
76-2356	IZ®	142	92.8	36.9	40.8	44.7	1434.3	25.66	W27X194	B1 (PZC 13)
		7634	2356	180	199.1	218.1	195861.9	7.82	W690X289	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
78-2293	IZ®	144.2	90.3	30.8	34.8	38.8	1534.3	25.73	W33X141	B1 (PZC 13)
		7754.6	2293	150.4	169.9	189.5	209523.9	7.84	W840X210	
78-2381	IZ®	145.5	93.7	33.8	37.6	41.5	1523.2	26.42	W30X173	B1 (PZC 13)
		7824.8	2381	164.9	183.8	202.6	207999.9	8.05	W760X257	
79-2432	IZ®	146.9	95.7	74	77.8	81.5	1276.4	25.01	W14X500	B1 (PZC 13)
		7897.6	2432	361.3	379.7	398.2	174305.4	7.62	W360X744	
80-2304	IZ®	148.8	90.7	29.8	33.8	37.8	1641.5	26.25	W36X135	B1 (PZC 13)
		7997.6	2304	145.6	165	184.5	224158.9	8	W920X201	
80-2335	IZ®	148.8	91.9	44.4	48.4	52.3	1502.3	25.07	W24X250	B1 (PZC 13)
		8000.8	2335	216.9	236.1	255.3	205147.3	7.64	W610X372	
81-2294	IZ®	151.4	90.3	32.3	36.3	40.3	1651.3	25.79	W33X152	B1 (PZC 13)
		8139.7	2294	157.5	177.1	196.6	225500.8	7.86	W840X226	
82-2359	IZ®	152.4	92.9	39.8	43.7	47.6	1591.7	25.76	W27X217	B1 (PZC 13)
		8194.2	2359	194.4	213.4	232.4	217357.3	7.85	W690X323	
83-2382	IZ®	154.7	93.8	36.1	39.9	43.8	1667.6	26.45	W30X191	B1 (PZC 13)
		8316.4	2382	176.1	194.9	213.7	227726.6	8.06	W760X284	
86-2437	IZ®	159.7	95.9	79.9	83.7	87.5	1439.7	25.17	W14X550	B1 (PZC 13)
		8587.2	2437	390.2	408.6	427	196602.7	7.67	W360X818	
86-2338	IZ®	159.8	92	48.2	52.1	56	1666.4	25.14	W24X279	B1 (PZC 13)
		8589.6	2338	235.1	254.3	273.5	227564.2	7.66	W610X415	
86-2360	IZ®	159.9	92.9	42.2	46.1	50	1710.5	25.79	W27X235	B1 (PZC 13)
		8598.6	2360	206	225	244	233588	7.86	W690X350	
86-2304	IZ®	160.7	90.7	31.8	35.8	39.8	1841.1	26.32	W36X150	B1 (PZC 13)
		8640.2	2304	155.5	174.9	194.4	251414.8	8.02	W920X223	
87-2292	IZ®	162.6	90.2	34.4	38.4	42.4	1834.6	25.79	W33X169	B1 (PZC 13)
		8743.9	2292	167.9	187.5	207	250527	7.86	W840X251	
89-2384	IZ®	164.5	93.9	38.6	42.4	46.3	1828.7	26.52	W30X211	B1 (PZC 13)
		8846.7	2384	188.4	207.3	226.1	249721.2	8.08	W760X314	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
90-2305	IZ®	167.2	90.7	33.2	37.1	41.1	1957.6	26.35	W36X160	B1 (PZC 13)
		8991.2	2305	161.9	181.3	200.8	267322.5	8.03	W920X238	
91-2300	IZ®	169.5	90.6	31.8	35.8	39.7	2036.1	26.65	W40X149	B1 (PZC 13)
		9113.8	2300	155.1	174.5	194	278051.9	8.12	W1000X222	
92-2362	IZ®	170.1	93	45	48.9	52.8	1869.8	25.86	W27X258	B1 (PZC 13)
		9145.8	2362	219.8	238.8	257.7	255337.7	7.88	W690X384	
92-2340	IZ®	170.5	92.1	51.6	55.5	59.4	1830	25.2	W24X306	B1 (PZC 13)
		9167.8	2340	251.7	270.9	290	249906.2	7.68	W610X455	
94-2306	IZ®	173.9	90.8	34.5	38.4	42.4	2076.5	26.38	W36X170	B1 (PZC 13)
		9347	2306	168.3	187.7	207.1	283570	8.04	W920X253	
94-2442	IZ®	174.2	96.1	87	90.8	94.5	1631.7	25.3	W14X605	B1 (PZC 13)
		9366.3	2442	424.7	443.1	461.5	222829.4	7.71	W360X900	
95-2400	IZ®	175.8	94.5	37.1	40.9	44.7	2068.4	27.17	W33X201	B1 (PZC 13)
		9451	2400	181	199.7	218.3	282458.4	8.28	W840X299	
96-2382	IZ®	177.6	93.8	41.7	45.5	49.4	2040.4	26.55	W30X235	B1 (PZC 13)
		9548	2382	203.4	222.3	241.1	278639.5	8.09	W760X350	
97-2364	IZ®	180.3	93.1	48	51.9	55.8	2035.4	25.93	W27X281	B1 (PZC 13)
		9696.2	2364	234.5	253.5	272.5	277954.8	7.9	W690X419	
97-2307	IZ®	180.8	90.8	36.1	40	44	2207.3	26.42	W36X182	B1 (PZC 13)
		9718.5	2307	176	195.5	214.9	301431.4	8.05	W920X271	
98-2343	IZ®	181.7	92.2	55.3	59.2	63.2	2006	25.3	W24X335	B1 (PZC 13)
		9769.1	2343	270.1	289.3	308.4	273938.4	7.71	W610X498	
100-2300	IZ®	185.5	90.6	34.1	38.1	42.1	2322.1	26.71	W40X167	B1 (PZC 13)
		9975.6	2300	166.7	186.2	205.6	317096.7	8.14	W1000X249	
100-2401	IZ®	186.8	94.5	39.6	43.4	47.2	2264.4	27.24	W33X221	B1 (PZC 13)
		10043.7	2401	193.3	212	230.7	309224.5	8.3	W840X329	
101-2308	IZ®	187.3	90.9	37.6	41.5	45.5	2333.4	26.45	W36X194	B1 (PZC 13)
		10071.5	2308	183.4	202.9	222.3	318644.1	8.06	W920X289	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
102-2385	IZ®	189.3	93.9	45	48.8	52.7	2244.1	26.61	W30X261	B1 (PZC 13)
		10176.9	2385	219.6	238.4	257.2	306456.6	8.11	W760X389	
102-2448	IZ®	189.7	96.4	94	97.8	101.5	1849.5	25.47	W14X665	B1 (PZC 13)
		10199.8	2448	459	477.3	495.6	252562.6	7.76	W360X990	
103-2367	IZ®	190.8	93.2	51.2	55.1	59	2209.5	25.99	W27X307	B1 (PZC 13)
		10260.4	2367	250.2	269.1	288	301722.9	7.92	W690X457	
105-2347	IZ®	195.1	92.4	59.8	63.7	67.6	2222.5	25.4	W24X370	B1 (PZC 13)
		10488.5	2347	292.1	311.2	330.3	303500.9	7.74	W610X551	
105-2309	IZ®	196	90.9	39.7	43.7	47.7	2504.3	26.48	W36X210	B1 (PZC 13)
		10538.8	2309	193.9	213.3	232.7	341987.3	8.07	W920X313	
106-2403	IZ®	197.5	94.6	42.1	45.9	49.7	2456.6	27.3	W33X241	B1 (PZC 13)
		10615.6	2403	205.6	224.2	242.9	335472.5	8.32	W840X359	
108-2300	IZ®	200.6	90.6	36.2	40.2	44.2	2596.5	26.78	W40X183	B1 (PZC 13)
		10784.5	2300	176.9	196.4	215.9	354573	8.16	W1000X272	
109-2370	IZ®	203.4	93.3	54.9	58.8	62.7	2421.2	26.09	W27X336	B1 (PZC 13)
		10933.9	2370	268.1	287	305.9	330639.6	7.95	W690X500	
109-2418	IZ®	203.4	95.2	40.4	44.2	48	2608	27.8	W36X230	B1 (PZC 13)
		10934	2418	197.2	215.7	234.2	356138.7	8.47	W920X342	
110-2387	IZ®	204.4	94	48.9	52.7	56.5	2505.1	26.68	W30X292	B1 (PZC 13)
		10986.8	2387	238.5	257.3	276.1	342087.1	8.13	W760X434	
110-2400	IZ®	205.3	94.5	36.7	40.6	44.4	2699.3	28.02	W40X199	B1 (PZC 13)
		11035.3	2400	179.3	198	216.7	368613	8.54	W1000X296	
112-2454	IZ®	207.5	96.6	101.6	105.4	109.1	2103.7	25.63	W14X730	B1 (PZC 13)
		11158.2	2454	496.2	514.5	532.8	287279.8	7.81	W360X1086	
113-2401	IZ®	211	94.5	45	48.8	52.6	2701.4	27.3	W33X263	B1 (PZC 13)
		11344.2	2401	219.5	238.2	256.8	368903	8.32	W840X392	
114-2308	IZ®	211.2	90.9	42.5	46.5	50.5	2791.2	26.52	W36X232	B1 (PZC 13)
		11356.1	2308	207.6	227	246.4	381162.6	8.08	W920X345	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
114-2419	IZ®	212	95.2	42.3	46.1	49.9	2770.6	27.83	W36X245	B1 (PZC 13)
		11396.3	2419	206.5	225	243.6	378343.3	8.48	W920X365	
116-2372	IZ®	216.5	93.4	59	62.9	66.7	2649.9	26.15	W27X368	B1 (PZC 13)
		11642.4	2372	288	306.9	325.8	361869.9	7.97	W690X548	
117-2300	IZ®	217.2	90.6	39.9	43.9	47.9	2945.7	26.81	W40X211	B1 (PZC 13)
		11675.1	2300	195	214.5	234	402263.4	8.17	W1000X314	
118-2390	IZ®	219.4	94.1	53.1	56.9	60.8	2777.3	26.78	W30X326	B1 (PZC 13)
		11796.1	2390	259.3	278	296.8	379270.4	8.16	W760X484	
118-2400	IZ®	219.7	94.5	38.9	42.7	46.5	2972.2	28.09	W40X215	B1 (PZC 13)
		11812	2400	189.8	208.5	227.2	405882.9	8.56	W1000X321	
119-2420	IZ®	220.4	95.3	44.1	47.9	51.7	2933.7	27.86	W36X260	B1 (PZC 13)
		11849.1	2420	215.5	234	252.5	400621.6	8.49	W920X387	
119-2471	IZ®	221.6	97.3	110.7	114.4	118.1	2306.3	25.79	W14X808	B1 (PZC 13)
		11915	2471	540.5	558.6	576.8	314948.8	7.86	W360X1202	
121-2310	IZ®	224.3	90.9	45.8	49.7	53.7	3058.7	26.58	W36X256	B1 (PZC 13)
		12056.5	2310	223.4	242.8	262.2	417687.5	8.1	W920X381	
121-2404	IZ®	224.9	94.6	48.4	52.3	56.1	2966.4	27.4	W33X291	B1 (PZC 13)
		12092.6	2404	236.5	255.2	273.8	405090.1	8.35	W840X433	
124-2302	IZ®	231.1	90.6	43	47	51	3243.5	26.88	W40X235	B1 (PZC 13)
		12422.4	2302	210.2	229.6	249.1	442932.8	8.19	W1000X350	
125-2422	IZ®	232.1	95.4	46.7	50.5	54.3	3163.9	27.93	W36X280	B1 (PZC 13)
		12479.1	2422	228	246.5	265	432052.6	8.51	W920X417	
126-2393	IZ®	233.9	94.2	57	60.8	64.7	3043.9	26.88	W30X357	B1 (PZC 13)
		12575.1	2393	278.3	297	315.7	415674.2	8.19	W760X531	
128-2406	IZ®	238.6	94.7	51.8	55.6	59.4	3230.2	27.47	W33X318	B1 (PZC 13)
		12827.9	2406	253	271.6	290.2	441114.5	8.37	W840X473	
129-2400	IZ®	239.5	94.5	43.2	47	50.8	3390.3	28.12	W40X249	B1 (PZC 13)
		12878.1	2400	210.7	229.4	248.1	462978.6	8.57	W1000X371	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
130-2423	IZ®	242.5	95.4	49.2	53	56.8	3371.9	27.96	W36X300	B1 (PZC 13)
		13039.8	2423	240.2	258.7	277.2	460457.4	8.52	W920X446	
132-2303	IZ®	245.1	90.7	46.9	50.9	54.8	3565.3	26.94	W40X264	B1 (PZC 13)
		13179	2303	228.8	248.3	267.8	486871.1	8.21	W1000X393	
134-2400	IZ®	248.6	94.5	40.8	44.6	48.4	3716.9	28.71	W44X230	B1 (PZC 13)
		13367	2400	199	217.6	236.3	507581	8.75	W1100X343	
134-2396	IZ®	248.9	94.3	61.4	65.2	69	3329.2	26.94	W30X391	B1 (PZC 13)
		13384.1	2396	299.6	318.3	337	454632	8.21	W760X582	
136-2304	IZ®	252.2	90.7	48.8	52.8	56.8	3729.1	26.94	W40X278	B1 (PZC 13)
		13561.8	2304	238.3	257.7	277.2	509239.9	8.21	W1000X415	
137-2402	IZ®	255.3	94.6	46.6	50.4	54.3	3729.4	28.19	W40X277	B1 (PZC 13)
		13723.2	2402	227.6	246.2	264.9	509286.3	8.59	W1000X412	
138-2409	IZ®	255.9	94.8	56.3	60.1	63.9	3573.1	27.53	W33X354	B1 (PZC 13)
		13757.4	2409	274.8	293.4	312	487933.5	8.39	W840X527	
139-2422	IZ®	257.7	95.4	52.7	56.5	60.2	3679.6	27.99	W36X328	B1 (PZC 13)
		13854	2422	257.1	275.6	294.1	502482.7	8.53	W920X488	
142-2402	IZ®	263.6	94.6	49.2	53	56.9	3928.9	28.19	W40X297	B1 (PZC 13)
		14173.6	2402	240.3	259	277.6	536529.7	8.59	W1000X443	
146-2400	IZ®	271.1	94.5	44.8	48.7	52.5	4223.4	28.78	W44X262	B1 (PZC 13)
		14572.8	2400	218.9	237.6	256.3	576747.9	8.77	W1100X390	
146-2411	IZ®	271.7	94.9	60.4	64.2	68.1	3895.9	27.63	W33X387	B1 (PZC 13)
		14606	2411	295.1	313.7	332.3	532021.3	8.42	W840X576	
147-2425	IZ®	272.8	95.5	56.4	60.2	64	3995	28.06	W36X359	B1 (PZC 13)
		14664.7	2425	275.6	294.1	312.5	545557.6	8.55	W920X534	
150-2308	IZ®	279.5	90.9	55.1	59	63	4341	27.07	W40X327	B1 (PZC 13)
		15026.7	2308	268.8	288.2	307.6	592808.2	8.25	W1000X486	
151-2404	IZ®	279.9	94.6	52.6	56.4	60.2	4281.3	28.29	W40X324	B1 (PZC 13)
		15049.3	2404	256.8	275.4	294.1	584653.7	8.62	W1000X483	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
151-2309	IZ®	280.8	90.9	55.7	59.7	63.7	4375.7	27.11	W40X331	B1 (PZC 13)
		15094.8	2309	272.1	291.5	310.9	597535.7	8.26	W1000X494	
155-2387	IZ®	287.3	94	80.2	84.1	87.9	3963.3	26.61	W27X539	B1 (PZC 13)
		15445.8	2387	391.8	410.6	429.3	541219.6	8.11	W690X802	
155-2402	IZ®	288.7	94.6	48.5	52.3	56.1	4642.6	28.85	W44X290	B1 (PZC 13)
		15518.8	2402	236.7	255.4	274	633982.1	8.79	W1100X433	
156-2427	IZ®	290.1	95.6	60.8	64.6	68.3	4365.3	28.16	W36X393	B1 (PZC 13)
		15595.8	2427	296.7	315.2	333.6	596114.8	8.58	W920X585	
161-2407	IZ®	299.3	94.8	57.3	61.1	65	4725.1	28.35	W40X362	B1 (PZC 13)
		16090.4	2407	279.9	298.5	317.2	645255.8	8.64	W1000X539	
163-2408	IZ®	303.5	94.8	58.6	62.4	66.2	4826.5	28.39	W40X372	B1 (PZC 13)
		16318	2408	286	304.6	323.2	659108.1	8.65	W1000X554	
167-2405	IZ®	310.8	94.7	53.8	57.7	61.5	5197.3	28.91	W44X335	B1 (PZC 13)
		16708	2405	262.9	281.5	300.1	709736.8	8.81	W1100X499	
168-2431	IZ®	313.1	95.7	66.4	70.1	73.9	4860.1	28.25	W36X439	B1 (PZC 13)
		16835.8	2431	324	342.4	360.9	663696.5	8.61	W920X653	
169-2314	IZ®	314.7	91.1	63.6	67.6	71.5	5162.4	27.27	W40X392	B1 (PZC 13)
		16916.9	2314	310.5	329.9	349.3	704970.7	8.31	W1000X584	
171-2409	IZ®	318.5	94.8	61.7	65.5	69.3	5165.4	28.42	W40X397	B1 (PZC 13)
		17125.4	2409	301.2	319.8	338.4	705375.4	8.66	W1000X591	
180-2412	IZ®	335.6	95	65.9	69.8	73.6	5565.3	28.52	W40X431	B1 (PZC 13)
		18042.5	2412	322	340.6	359.1	759988	8.69	W1000X642	
192-2437	IZ®	357.4	95.9	77.1	80.9	84.7	5844.7	28.45	W36X527	B1 (PZC 13)
		19213	2437	376.7	395	413.4	798145.9	8.67	W920X784	
201-2417	IZ®	374.7	95.2	74.9	78.7	82.5	6494.7	28.68	W40X503	B1 (PZC 13)
		20144.5	2417	365.8	384.4	402.9	886904	8.74	W1000X748	
225-2446	IZ®	418.4	96.3	92.1	95.9	99.6	7264.8	28.71	W36X650	B1 (PZC 13)
		22493.5	2446	449.7	468.1	486.4	992069.6	8.75	W920X967	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ[®] BNS[®]

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	in (mm)	
228-2424	IZ [®]	424	95.4	86.3	90.1	93.9	7702.7	28.88	W40X593	B1 (PZC 13)
		22795.4	2424	421.4	439.9	458.4	1051866.9	8.8	W1000X883	
266-2457	IZ [®]	493.8	96.7	110	113.8	117.5	9106.3	29.04	W36X798	B1 (PZC 13)
		26548.6	2457	537.2	555.4	573.7	1243541	8.85	W920X1188	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ[®].

Specifications

When using steel sheet pile, it is necessary to make allowances for deviations from theoretical exactness. The degree of precision obtainable in the production of sheet pile is limited by the basic character of the rolling processes and normal limitations of mill equipment. Care must be taken during installation to assure that each element is being set at the desired driving dimension.

- Dimensions typically shown are nominal.
- Actual thicknesses vary due to mill rolling practices; however, permitted variations for such dimensions are not addressed.
- Interlocks should be reasonably free-sliding when threaded.
- Terms, tolerance, dimensions, and delivery conditions are in accordance with EN 10248 and/or ASTM A6.
- Welding is in accordance with AWS D1.1.

	AMERICAN ASTM A 6		EUROPEAN EN 10248
Mass	5%	-2.5%	± 5%
Length	+ 5in.	-0 in.	± 200mm
Height			± 7mm
Thickness			± 0.5mm for ≤ 8.5mm ± 6% for > 8.5mm
Width Interlocked			± 3%
Straightness			0.2% of the length
Ends ou of Square			2% of the width

Available Steel Grades

AMERICAN			CANADIAN			EUROPEAN		
ASTM	YIELD STRENGTH		CSA G40.21	YIELD STRENGTH		EN 10248	YIELD STRENGTH	
	(ksi)	(MPa)		(ksi)	(MPa)		(ksi)	(MPa)
A 328	39	270	Grade 260 W	38	260	S 240 GP	35	240
A 572 Grade 42	42	290	Grade 300 W	44	300	S 270 GP	39	270
A 572 Grade 50	50	345	Grade 355 W	50	350	S 320 GP	46	320
A 572 Grade 55	55	380	Grade 400 W	58	400	S 355 GP	51	355
A 572 Grade 60	60	415				S 390 GP	57	390
A 572 Grade 65*	65	450				S 430 GP	62	430
A 588 Grade 50	50	345				S 450 GP*	65	450
API 5L x70	70	485						
ASTM A 690 MARINER®	50	345						

ENGINEERING DISCLAIMER

This publication contains information on the properties of hot-rolled sheet pile based on accepted engineering practices related to sheet pile products and projects. The use of the data contained herein must be supplemented with qualified professional judgment.

LEGAL DISCLAIMER

“The information, including technical and engineering data, figures, tables, designs, drawings, details, suggested procedures, and suggested specifications, presented in this publication are for general information only. While every effort has been made to ensure its accuracy, this information should not be used or relied upon for any specific application without independent competent professional examination and verification of its accuracy, suitability and applicability.

Anyone making use of the material does so at their own risk and assumes any and all liability resulting from such use. **SHEET PILE LLC DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES OF MERCHANTABILITY FITNESS FOR ANY GENERAL OR PARTICULAR PURPOSE OR FREEDOM FROM INFRINGEMENT OF ANY PATENT, TRADEMARK, OR COPYRIGHT IN REGARD TO INFORMATION OR PRODUCTS CONTAINED OR REFERRED TO HEREIN.** Nothing herein contained shall be construed as granting a license, express or implied, under any patents.

These brands and products are supplied exclusively by or through Sheet Pile LLC.



Toll free: 866.666.7453 | +1 512.243.1228 | info@sheet-pile.com | sheet-pile.com

© 2026 Sheet Pile LLC. All rights reserved.