



BALL & SOCKET
HOT ROLLED / MULTI-USE




PilePro® Sheet Pile Connectors




PZ 90




Colt




Cobra




PZ Tee



Joker



Bullhead



PZT-S

Sheet Pile LLC is the owner and assignee of US 7,390,145, related to these connectors.




Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant



BALL & SOCKET
HOT ROLLED / MULTI-USE




Configuration W1 (PZC 13)

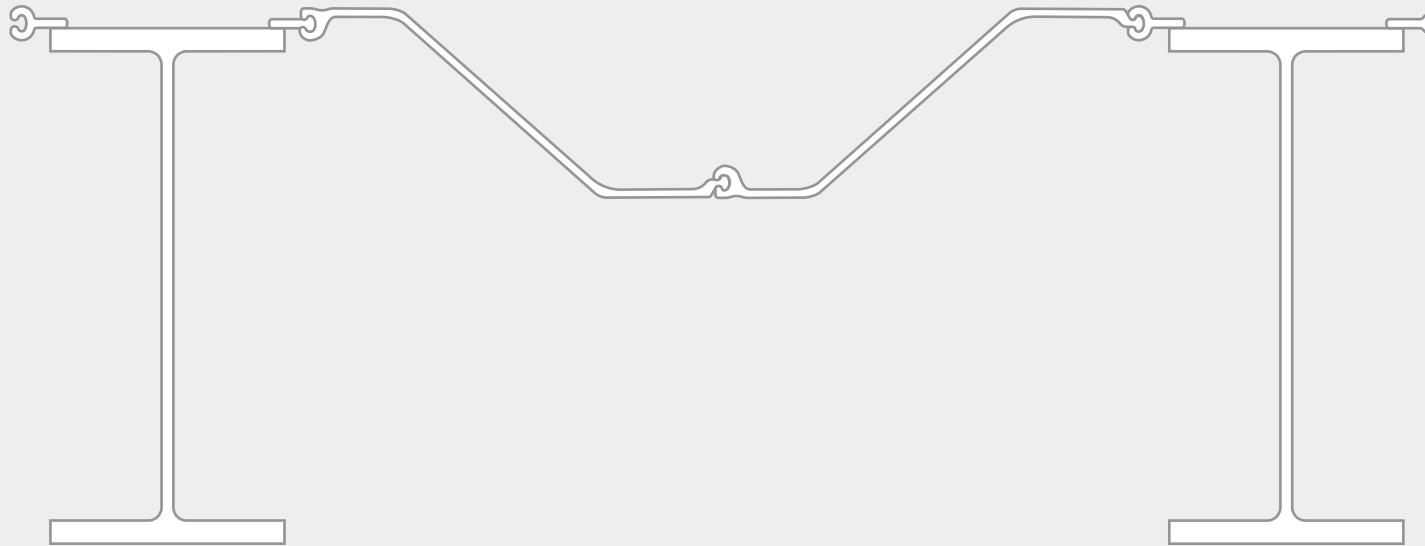

SECTION NAME:

79 - 2045



Section width in mm

Section modulus (elastic) in $\text{cm}^3/\text{m} \div 100$

These are examples from a large variety of possible IZ[®] solutions.

Please configure your own system on sheet-pile.com/iz

*WOF[®] and WOM[®] are available in a wide range of sizes — 100% melted and manufactured in the USA and BABA 2021 compliant.
Sheet Pile LLC is the owner and assignee of numerous patents and IP, that may be related to this sheet pile solution.*



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
27-1864	IZ®	50.5	73.4	25.3	29	32.6	328.6	18.9	HP16x88	W1 (PZC 13)
		2713	1864.5	123.7	141.5	159.4	44872.4	5.76	HP410x131	
27-1841	IZ®	50.7	72.5	28.1	31.8	35.5	317.9	18.34	HP14x102	W1 (PZC 13)
		2723.3	1840.6	137.1	155.2	173.3	43417	5.59	HP360x152	
27-1657	IZ®	50.7	65.2	22.5	26.7	30.8	342.1	16.67	W18X55	W1 (PZC 13)
		2723.6	1657	110	130.1	150.2	46722.7	5.08	W460X82	
27-1726	IZ®	50.8	68	23.9	27.8	31.8	334	17.29	W16X67	W1 (PZC 13)
		2729.1	1726	116.5	135.8	155.1	45616.1	5.27	W410X100	
27-1631	IZ®	50.8	64.2	20.8	25	29.2	353.3	16.77	W21X44	W1 (PZC 13)
		2732.7	1631	101.5	121.9	142.4	48241.8	5.11	W530X66	
27-1776	IZ®	50.9	69.9	29.7	33.6	37.4	306	17.32	W12X106	W1 (PZC 13)
		2734.9	1776	145.1	163.8	182.6	41782.7	5.28	W310X158	
28-1836	IZ®	52.2	72.3	27.6	31.3	35	329.2	18.37	W14X99	W1 (PZC 13)
		2807	1836	134.8	152.9	171.1	44961.4	5.6	W360X147	
28-1673	IZ®	52.3	65.9	21	25.1	29.1	367.4	17.32	W21X48	W1 (PZC 13)
		2810.9	1673	102.5	122.4	142.3	50177.3	5.28	W530X72	
28-1658	IZ®	52.8	65.3	23.4	27.5	31.6	360.9	16.7	W18X60	W1 (PZC 13)
		2837.6	1658	114.2	134.3	154.4	49285	5.09	W460X89	
29-1779	IZ®	54.1	70	32.1	35.9	39.8	330.1	17.39	W12X120	W1 (PZC 13)
		2908.1	1779	156.8	175.5	194.2	45071.9	5.3	W310X179	
29-1632	IZ®	54.2	64.3	21.9	26.1	30.2	384.5	16.8	W21X50	W1 (PZC 13)
		2912.6	1632	106.9	127.3	147.7	52510.4	5.12	W530X74	
29-1727	IZ®	54.2	68	25.6	29.6	33.5	363.4	17.32	W16X77	W1 (PZC 13)
		2914.3	1727	125.1	144.4	163.7	49632.1	5.28	W410X114	
29-1844	IZ®	54.4	72.6	30.4	34.1	37.8	346.6	18.41	HP14x117	W1 (PZC 13)
		2924.9	1843.8	148.7	166.7	184.8	47328.4	5.61	HP360x174	
29-1866	IZ®	54.5	73.5	27.6	31.2	34.9	361.1	18.96	HP16x101	W1 (PZC 13)
		2929.6	1866	134.7	152.5	170.4	49304.8	5.78	HP410x151	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
30-1659	IZ®	54.8	65.3	24.3	28.4	32.5	379.2	16.73	W18X65	W1 (PZC 13)
		2946.1	1659	118.4	138.5	158.6	51788.2	5.1	W460X97	
30-1837	IZ®	55.1	72.3	29.3	33	36.7	351.5	18.41	W14X109	W1 (PZC 13)
		2962	1837	142.8	161	179.1	48002.9	5.61	W360X162	
30-1675	IZ®	56.4	65.9	22.3	26.4	30.4	406.2	17.36	W21X55	W1 (PZC 13)
		3034.1	1675	108.8	128.7	148.6	55465.6	5.29	W530X82	
31-1660	IZ®	57	65.4	25.4	29.5	33.6	400.2	16.77	W18X71	W1 (PZC 13)
		3064.3	1660	124	144.1	164.1	54651.5	5.11	W460X106	
31-1781	IZ®	58	70.1	34.8	38.6	42.4	360.4	17.45	W12X136	W1 (PZC 13)
		3116.9	1781	169.8	188.5	207.2	49220.2	5.32	W310X202	
31-1746	IZ®	58	68.7	25	28.9	32.8	407.8	17.85	W18X76	W1 (PZC 13)
		3118.9	1746	122	141	160.1	55688.9	5.44	W460X113	
31-1839	IZ®	58	72.4	31.1	34.8	38.5	374.9	18.44	W14X120	W1 (PZC 13)
		3120.3	1839	151.6	169.8	187.9	51189.9	5.62	W360X179	
31-1729	IZ®	58.4	68.1	27.7	31.7	35.6	399.3	17.39	W16X89	W1 (PZC 13)
		3137.3	1729	135.4	154.7	173.9	54528.8	5.3	W410X132	
31-1632	IZ®	58.4	64.3	23.2	27.4	31.5	425	16.83	W21X57	W1 (PZC 13)
		3141.5	1632	113.2	133.6	154	58037.8	5.13	W530X85	
32-1869	IZ®	60.3	73.6	30.8	34.5	38.1	410.9	19.03	HP16x121	W1 (PZC 13)
		3243.6	1869.2	150.4	168.3	186.1	56118	5.8	HP410x181	
33-1675	IZ®	60.6	65.9	23.5	27.6	31.7	445.9	17.39	W21X62	W1 (PZC 13)
		3258	1675	114.9	134.8	154.7	60891.4	5.3	W530X92	
33-1840	IZ®	61.4	72.4	33	36.7	40.4	401.2	18.47	W14X132	W1 (PZC 13)
		3299	1840	160.9	179	197.1	54791.4	5.63	W360X196	
33-1748	IZ®	62	68.8	26.7	30.6	34.5	444.8	17.91	W18X86	W1 (PZC 13)
		3335.3	1748	130.3	149.4	168.4	60737.9	5.46	W460X128	
33-1783	IZ®	62.2	70.2	37.5	41.4	45.2	393.3	17.52	W12X152	W1 (PZC 13)
		3341.8	1783	183.3	201.9	220.6	53707.9	5.34	W310X226	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
34-1731	IZ®	62.3	68.1	29.7	33.6	37.5	434.9	17.42	W16X100	W1 (PZC 13)
		3351	1731	144.8	164	183.3	59393.4	5.31	W410X149	
34-1644	IZ®	63.2	64.7	22.7	26.9	31	484.4	17.42	W24X55	W1 (PZC 13)
		3399.7	1644	110.9	131.2	151.4	66145.4	5.31	W610X82	
34-1676	IZ®	63.8	66	24.6	28.7	32.7	477.9	17.42	W21X68	W1 (PZC 13)
		3430.5	1676	120	139.9	159.8	65255.6	5.31	W530X101	
35-1860	IZ®	64.6	73.2	34.8	38.4	42.1	427.4	18.73	W14X145	W1 (PZC 13)
		3475.4	1860	169.8	187.7	205.6	58370.3	5.71	W360X216	
36-1872	IZ®	66	73.7	34	37.7	41.3	458	19.06	HP16x141	W1 (PZC 13)
		3546.4	1872.4	166.1	183.9	201.7	62547.3	5.81	HP410x211	
36-1677	IZ®	66.2	66	25.5	29.6	33.7	502.9	17.45	W21X73	W1 (PZC 13)
		3561.4	1677	124.6	144.5	164.3	68679.8	5.32	W530X109	
36-1749	IZ®	66.5	68.9	28.6	32.5	36.4	486.7	17.95	W18X97	W1 (PZC 13)
		3573.6	1749	139.7	158.7	177.8	66466	5.47	W460X144	
36-1785	IZ®	66.8	70.3	40.6	44.4	48.2	431	17.59	W12X170	W1 (PZC 13)
		3589.4	1785	198	216.7	235.3	58856.8	5.36	W310X253	
36-1645	IZ®	67.6	64.8	24	28.1	32.3	530.6	17.45	W24X62	W1 (PZC 13)
		3633.8	1645	117	137.3	157.5	72460.2	5.32	W610X92	
37-1861	IZ®	68.5	73.3	37.1	40.7	44.4	459.8	18.77	W14X159	W1 (PZC 13)
		3683.9	1861	181.1	199	216.9	62791	5.72	W360X237	
38-1750	IZ®	69.7	68.9	30.2	34.1	38	518.7	17.98	W18X106	W1 (PZC 13)
		3747	1750	147.2	166.3	185.3	70826.5	5.48	W460X158	
38-1917	IZ®	69.7	75.5	32.3	35.8	39.4	511.8	19.91	HP18x135	W1 (PZC 13)
		3747.9	1916.8	157.5	174.9	192.3	69892.2	6.07	HP360x202	
38-1678	IZ®	70.9	66.1	27.2	31.3	35.4	551.4	17.49	W21X83	W1 (PZC 13)
		3810	1678	133	152.8	172.7	75304	5.33	W530X123	
38-1694	IZ®	71.1	66.7	24.3	28.3	32.4	567.6	18.11	W24X68	W1 (PZC 13)
		3824	1694	118.7	138.4	158.1	77512.8	5.52	W610X101	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
39-1788	IZ®	71.8	70.4	43.8	47.6	51.4	474.2	17.65	W12X190	W1 (PZC 13)
		3861	1788	213.9	232.5	251.2	64753.7	5.38	W310X283	
39-1876	IZ®	72.1	73.8	37.3	40.9	44.6	512.6	19.16	HP16x162	W1 (PZC 13)
		3875.7	1875.6	182.1	199.8	217.6	69995.9	5.84	HP410x242	
39-1864	IZ®	73.1	73.4	39.8	43.4	47.1	500.2	18.83	W14X176	W1 (PZC 13)
		3931.4	1864	194.3	212.1	230	68302.3	5.74	W360X262	
40-1752	IZ®	75	69	32.4	36.3	40.2	571.1	18.01	W18X119	W1 (PZC 13)
		4033.6	1752	158.3	177.3	196.3	77995.4	5.49	W460X177	
41-1680	IZ®	75.4	66.1	29	33.1	37.1	601	17.52	W21X93	W1 (PZC 13)
		4054.7	1680	141.7	161.5	181.3	82075.8	5.34	W530X138	
41-1920	IZ®	76.3	75.6	35.6	39.2	42.7	573.5	19.98	HP18x157	W1 (PZC 13)
		4104.3	1920	173.9	191.2	208.6	78311.3	6.09	HP360x234	
41-1694	IZ®	76.4	66.7	25.7	29.8	33.8	625.5	18.14	W24X76	W1 (PZC 13)
		4109.1	1694	125.7	145.4	165	85416.7	5.53	W610X113	
41-1791	IZ®	76.9	70.5	47.2	51.1	54.9	519.2	17.75	W12X210	W1 (PZC 13)
		4132	1791	230.7	249.3	267.8	70901.5	5.41	W310X313	
42-1885	IZ®	77.8	74.2	40.6	44.2	47.9	564.7	19.29	HP16x183	W1 (PZC 13)
		4183.1	1885.1	198.3	216	233.7	77116.2	5.88	HP410x272	
42-1865	IZ®	78.2	73.4	42.5	46.2	49.8	544.4	18.9	W14X193	W1 (PZC 13)
		4206.8	1865	207.6	225.5	243.3	74346.2	5.76	W360X287	
42-1778	IZ®	78.4	70	28.9	32.7	36.5	628.9	18.8	W21X101	W1 (PZC 13)
		4213	1778	141	159.7	178.4	85881.5	5.73	W530X150	
43-1749	IZ®	80.2	68.9	34.4	38.3	42.2	623	18.04	W18X130	W1 (PZC 13)
		4309.3	1749	168	187	206.1	85078.6	5.5	W460X193	
44-1695	IZ®	81.4	66.7	27.2	31.2	35.2	681.4	18.18	W24X84	W1 (PZC 13)
		4376.3	1695	132.6	152.2	171.9	93047.9	5.54	W610X125	
44-1794	IZ®	82.4	70.6	50.6	54.4	58.2	568.6	17.81	W12X230	W1 (PZC 13)
		4432.2	1794	246.9	265.5	284	77647.4	5.43	W310X342	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
44-1779	IZ®	82.6	70	30.6	34.4	38.2	674.8	18.83	W21X111	W1 (PZC 13)
		4438.2	1779	149.3	168	186.7	92152.4	5.74	W530X165	
45-1867	IZ®	83.4	73.5	45.4	49.1	52.7	590.1	18.93	W14X211	W1 (PZC 13)
		4481.9	1867	221.7	239.5	257.4	80579.4	5.77	W360X314	
45-1923	IZ®	84.2	75.7	39.3	42.9	46.4	648.4	20.05	HP18x181	W1 (PZC 13)
		4527.3	1923.2	192	209.4	226.7	88541.7	6.11	HP360x269	
46-1751	IZ®	85.4	68.9	36.6	40.5	44.4	677.7	18.08	W18X143	W1 (PZC 13)
		4593.9	1751	178.5	197.6	216.6	92544.8	5.51	W460X213	
47-1696	IZ®	87.2	66.8	29	33.1	37.1	749.9	18.21	W24X94	W1 (PZC 13)
		4685.7	1696	141.8	161.4	181	102399.9	5.55	W610X140	
47-1781	IZ®	87.5	70.1	32.3	36.2	40	729.7	18.86	W21X122	W1 (PZC 13)
		4703.1	1781	157.9	176.6	195.3	99653.5	5.75	W530X182	
47-1796	IZ®	87.9	70.7	54.2	58	61.8	620	17.88	W12X252	W1 (PZC 13)
		4723.7	1796	264.5	283.1	301.6	84669	5.45	W310X375	
48-1870	IZ®	89.5	73.6	48.9	52.6	56.2	647.2	19.03	W14X233	W1 (PZC 13)
		4809.6	1870	239	256.8	274.6	88379.5	5.8	W360X347	
48-1719	IZ®	89.7	67.7	26.9	30.8	34.8	801.4	18.9	W27X84	W1 (PZC 13)
		4820	1719	131.2	150.5	169.9	109442.2	5.76	W690X125	
48-1790	IZ®	89.8	70.5	29.2	33	36.8	781.9	19.39	W24X104	W1 (PZC 13)
		4825.9	1790	142.6	161.2	179.8	106774.7	5.91	W610X155	
49-1753	IZ®	91	69	39.1	43	46.9	736.9	18.14	W18X158	W1 (PZC 13)
		4891.3	1753	190.9	209.9	228.9	100627	5.53	W460X235	
49-1926	IZ®	91.8	75.8	43	46.6	50.1	725.7	20.11	HP18x204	W1 (PZC 13)
		4935.1	1926.4	210.1	227.4	244.7	99106.5	6.13	HP460x304	
49-1782	IZ®	91.9	70.2	34	37.9	41.7	779.5	18.9	W21X132	W1 (PZC 13)
		4943.5	1782	166.2	184.9	203.6	106442.2	5.76	W530X196	
50-1695	IZ®	92.8	66.7	30.6	34.6	38.6	816.2	18.21	W24X103	W1 (PZC 13)
		4987.1	1695	149.2	168.9	188.5	111465.9	5.55	W610X153	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
51-1800	IZ®	95.3	70.9	58.5	62.3	66.1	692.4	17.98	W12X279	W1 (PZC 13)
		5121.7	1800	285.8	304.3	322.8	94557.5	5.48	W310X415	
52-1872	IZ®	96.2	73.7	52.8	56.5	60.1	713	19.09	W14X257	W1 (PZC 13)
		5174.1	1872	258	275.8	293.6	97370.4	5.82	W360X382	
52-1791	IZ®	96.7	70.5	31.4	35.2	39	865.3	19.42	W24X117	W1 (PZC 13)
		5200.9	1791	153.1	171.7	190.3	118160.8	5.92	W610X174	
52-1720	IZ®	97	67.7	28.5	32.5	36.5	891.6	18.96	W27X94	W1 (PZC 13)
		5212.6	1720	139.3	158.7	178	121762.7	5.78	W690X140	
53-1755	IZ®	98.1	69.1	42	45.9	49.8	814.2	18.21	W18X175	W1 (PZC 13)
		5274.6	1755	205	223.9	242.9	111190.5	5.55	W460X260	
53-1784	IZ®	98.6	70.2	36.6	40.4	44.3	856.7	18.96	W21X147	W1 (PZC 13)
		5301.5	1784	178.8	197.4	216.1	116984.7	5.78	W530X219	
55-1720	IZ®	102.8	67.7	30	34	38	966.7	19	W27X102	W1 (PZC 13)
		5527.5	1720	146.6	166	185.3	132006	5.79	W690X152	
55-1802	IZ®	102.9	70.9	62.9	66.7	70.5	770	18.08	W12X305	W1 (PZC 13)
		5532.1	1802	307.2	325.7	344.2	105155	5.51	W310X454	
55-1730	IZ®	103.1	68.1	27.6	31.6	35.5	998.6	19.52	W30X90	W1 (PZC 13)
		5543.3	1730	134.9	154.1	173.4	136368.6	5.95	W760X134	
56-1793	IZ®	104.1	70.6	33.7	37.5	41.3	957.5	19.49	W24X131	W1 (PZC 13)
		5598.5	1793	164.7	183.3	201.9	130748.9	5.94	W610X195	
56-1875	IZ®	104.2	73.8	57	60.6	64.2	790.4	19.16	W14X283	W1 (PZC 13)
		5601	1875	278.1	295.9	313.6	107937.5	5.84	W360X421	
58-1731	IZ®	108.7	68.1	29.3	33.2	37.2	1080.8	19.55	W30X99	W1 (PZC 13)
		5844.8	1731	143	162.2	181.4	147588.2	5.96	W760X147	
59-1781	IZ®	109.4	70.1	39.9	43.8	47.6	982	18.96	W21X166	W1 (PZC 13)
		5881.6	1781	194.9	213.6	232.3	134101.9	5.78	W530X248	
59-1722	IZ®	109.8	67.8	32	36	40	1060.8	19.03	W27X114	W1 (PZC 13)
		5900.8	1722	156.5	175.8	195.2	144856.8	5.8	W690X170	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
60-1806	IZ®	111.5	71.1	68	71.8	75.6	859.4	18.18	W12X336	W1 (PZC 13)
		5994.1	1806	332.2	350.6	369.1	117360	5.54	W310X500	
60-1878	IZ®	112.1	73.9	61.4	65	68.7	872.3	19.26	W14X311	W1 (PZC 13)
		6025.3	1878	299.8	317.5	335.3	119119.2	5.87	W360X463	
61-1794	IZ®	113	70.6	36.2	40	43.8	1066.3	19.55	W24X146	W1 (PZC 13)
		6075.6	1794	176.9	195.5	214	145619.2	5.96	W610X217	
62-1732	IZ®	115.9	68.2	30.8	34.8	38.7	1180.5	19.59	W30X108	W1 (PZC 13)
		6229.1	1732	150.6	169.8	189	161205.3	5.97	W760X161	
63-1784	IZ®	116.3	70.2	42.7	46.5	50.3	1067	19.03	W21X182	W1 (PZC 13)
		6252	1784	208.2	226.9	245.6	145707.7	5.8	W530X272	
65-1720	IZ®	120.1	67.7	34.7	38.7	42.6	1201.6	19.06	W27X129	W1 (PZC 13)
		6457.7	1720	169.4	188.8	208.2	164087.3	5.81	W690X192	
65-1882	IZ®	121.2	74.1	66.3	69.9	73.6	970	19.36	W14X342	W1 (PZC 13)
		6518.7	1882	323.8	341.5	359.2	132458.4	5.9	W360X509	
65-1795	IZ®	121.4	70.7	39	42.8	46.6	1176.4	19.59	W24X162	W1 (PZC 13)
		6525.9	1795	190.3	208.9	227.4	160653.8	5.97	W610X241	
66-1733	IZ®	122.4	68.2	32.3	36.2	40.2	1273.8	19.62	W30X116	W1 (PZC 13)
		6582.8	1733	157.7	177	196.2	173953.7	5.98	W760X173	
67-1785	IZ®	125	70.3	45.9	49.7	53.5	1175.7	19.09	W21X201	W1 (PZC 13)
		6718.2	1785	224	242.6	261.3	160557.8	5.82	W530X300	
68-1821	IZ®	126.9	71.7	35.8	39.5	43.3	1292.7	20.34	W27X146	W1 (PZC 13)
		6820.3	1821	174.7	193	211.3	176530.1	6.2	W690X217	
69-1733	IZ®	128.6	68.2	33.6	37.5	41.5	1362.2	19.65	W30X124	W1 (PZC 13)
		6916.3	1733	164.1	183.3	202.5	186022.8	5.99	W760X185	
70-1793	IZ®	129.2	70.6	41.3	45.1	48.9	1278.2	19.59	W24X176	W1 (PZC 13)
		6946.1	1793	201.5	220.1	238.6	174544.4	5.97	W610X262	
70-1884	IZ®	130	74.2	70.8	74.4	78	1063.8	19.42	W14X370	W1 (PZC 13)
		6990.9	1884	345.5	363.2	380.9	145272.8	5.92	W360X551	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
72-1734	IZ®	134.1	68.3	35.1	39	42.9	1446.4	19.69	W30X132	W1 (PZC 13)
		7209	1734	171.2	190.4	209.6	197518.1	6	W760X196	
73-1822	IZ®	135.4	71.7	38.3	42.1	45.8	1415.4	20.37	W27X161	W1 (PZC 13)
		7278.5	1822	187.1	205.4	223.6	193286.1	6.21	W690X240	
73-1758	IZ®	135.4	69.2	32.1	36	39.9	1513.2	20.44	W33X118	W1 (PZC 13)
		7281.1	1758	156.8	175.8	194.7	206642.7	6.23	W840X176	
74-1795	IZ®	136.7	70.7	43.9	47.7	51.5	1382	19.65	W24X192	W1 (PZC 13)
		7349.4	1795	214.4	233	251.5	188725	5.99	W610X285	
74-1887	IZ®	138.2	74.3	75.2	78.8	82.4	1157.7	19.49	W14X398	W1 (PZC 13)
		7430	1887	367	384.7	402.3	158100.3	5.94	W360X592	
78-1824	IZ®	144.2	71.8	41.1	44.8	48.6	1544.5	20.44	W27X178	W1 (PZC 13)
		7753.3	1824	200.7	218.9	237.2	210913.5	6.23	W690X265	
78-1796	IZ®	144.5	70.7	46.5	50.3	54.1	1490.2	19.69	W24X207	W1 (PZC 13)
		7769.2	1796	227	245.5	264	203505.6	6	W610X307	
78-1758	IZ®	145.6	69.2	34.2	38.1	42	1673.5	20.47	W33X130	W1 (PZC 13)
		7830.4	1758	167.1	186.1	205	228531.4	6.24	W840X193	
79-1732	IZ®	146.6	68.2	37.9	41.8	45.8	1634.7	19.72	W30X148	W1 (PZC 13)
		7879.4	1732	185	204.3	223.5	223227.3	6.01	W760X220	
79-1890	IZ®	147.1	74.4	79.6	83.2	86.8	1258.9	19.59	W14X426	W1 (PZC 13)
		7908.8	1890	388.5	406.1	423.7	171917.3	5.97	W360X634	
83-1759	IZ®	154.8	69.3	36.1	40	43.9	1823.6	20.51	W33X141	W1 (PZC 13)
		8325	1759	176.4	195.3	214.3	249026.3	6.25	W840X210	
83-1799	IZ®	155.1	70.8	50.2	54	57.7	1641.4	19.78	W24X229	W1 (PZC 13)
		8338.4	1799	244.9	263.4	281.9	224153.3	6.03	W610X341	
83-1894	IZ®	155.1	74.6	84.1	87.7	91.3	1355.6	19.69	W14X455	W1 (PZC 13)
		8338.8	1894	410.4	428	445.6	185113.8	6	W360X677	
84-1822	IZ®	155.2	71.7	43.8	47.5	51.3	1703.5	20.44	W27X194	W1 (PZC 13)
		8345.6	1822	213.8	232.1	250.4	232634.4	6.23	W690X289	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
85-1847	IZ®	157.4	72.7	39.7	43.4	47.1	1802.6	21.19	W30X173	W1 (PZC 13)
		8462.1	1847	193.9	211.9	230	246163.5	6.46	W760X257	
85-1770	IZ®	158.7	69.7	34.8	38.7	42.5	1947.1	21.03	W36X135	W1 (PZC 13)
		8534.7	1770	170	188.8	207.6	265892.3	6.41	W920X201	
88-1760	IZ®	163.4	69.3	38	41.9	45.8	1967.4	20.57	W33X152	W1 (PZC 13)
		8786.6	1760	185.7	204.6	223.5	268663	6.27	W840X226	
89-1801	IZ®	165.9	70.9	53.7	57.5	61.2	1796.8	19.85	W24X250	W1 (PZC 13)
		8916.7	1801	262.1	280.6	299	245369.6	6.05	W610X372	
90-1825	IZ®	168	71.9	47.6	51.3	55.1	1897.1	20.54	W27X217	W1 (PZC 13)
		9029.7	1825	232.4	250.6	268.9	259063.2	6.26	W690X323	
91-1848	IZ®	168.5	72.8	42.7	46.3	50	1979.5	21.23	W30X191	W1 (PZC 13)
		9057.7	1848	208.3	226.3	244.3	270323.9	6.47	W760X284	
91-1898	IZ®	169.3	74.7	91.1	94.7	98.3	1530.1	19.78	W14X500	W1 (PZC 13)
		9102.3	1898	444.7	462.3	479.8	208942.9	6.03	W360X744	
93-1770	IZ®	173	69.7	37.4	41.3	45.2	2192.7	21.1	W36X150	W1 (PZC 13)
		9299.3	1770	182.8	201.6	220.5	299436.6	6.43	W920X223	
95-1758	IZ®	177	69.2	40.8	44.7	48.6	2194.4	20.57	W33X169	W1 (PZC 13)
		9515.2	1758	199.3	218.2	237.1	299663.5	6.27	W840X251	
95-1826	IZ®	177.2	71.9	50.7	54.4	58.1	2043.3	20.57	W27X235	W1 (PZC 13)
		9527.6	1826	247.3	265.5	283.8	279030.3	6.27	W690X350	
96-1804	IZ®	179.4	71	58.5	62.3	66	1999.8	19.91	W24X279	W1 (PZC 13)
		9644.5	1804	285.6	304	322.5	273085	6.07	W610X415	
97-1850	IZ®	180.5	72.8	45.9	49.6	53.3	2176.8	21.29	W30X211	W1 (PZC 13)
		9702.3	1850	224.2	242.2	260.1	297258.4	6.49	W760X314	
97-1771	IZ®	180.8	69.7	39.2	43	46.9	2335.5	21.13	W36X160	W1 (PZC 13)
		9720.8	1771	191.2	210	228.8	318934.5	6.44	W920X238	
98-1766	IZ®	182.1	69.5	37.4	41.2	45.1	2426.1	21.42	W40X149	W1 (PZC 13)
		9792.5	1766	182.4	201.2	220.1	331302.6	6.53	W1000X222	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
100-1903	IZ®	185.1	74.9	98.6	102.2	105.8	1731.7	19.95	W14X550	W1 (PZC 13)
		9951.6	1903	481.5	499	516.5	236472.8	6.08	W360X818	
102-1772	IZ®	188.8	69.8	40.9	44.7	48.6	2481.7	21.16	W36X170	W1 (PZC 13)
		10149.7	1772	199.5	218.3	237	338893.6	6.45	W920X253	
102-1828	IZ®	189.7	72	54.3	58	61.8	2239.9	20.64	W27X258	W1 (PZC 13)
		10199	1828	265.1	283.3	301.5	305882.2	6.29	W690X384	
103-1866	IZ®	191.7	73.5	43.9	47.5	51.2	2459.2	21.95	W33X201	W1 (PZC 13)
		10307.8	1866	214.2	232.1	249.9	335820.7	6.69	W840X299	
104-1806	IZ®	192.7	71.1	62.9	66.7	70.4	2202.6	19.98	W24X306	W1 (PZC 13)
		10358.8	1806	307	325.4	343.9	300790.5	6.09	W610X455	
106-1848	IZ®	196.4	72.8	49.9	53.6	57.3	2438.3	21.33	W30X235	W1 (PZC 13)
		10558.9	1848	243.5	261.5	279.5	332977.2	6.5	W760X350	
106-1773	IZ®	197.2	69.8	42.9	46.8	50.6	2642	21.19	W36X182	W1 (PZC 13)
		10601.6	1773	209.5	228.3	247.1	360784.3	6.46	W920X271	
108-1766	IZ®	201.3	69.5	40.4	44.3	48.2	2779.5	21.49	W40X167	W1 (PZC 13)
		10821.6	1766	197.5	216.3	235.2	379562.7	6.55	W1000X249	
109-1830	IZ®	202.3	72	58.2	61.9	65.6	2444.5	20.7	W27X281	W1 (PZC 13)
		10877.7	1830	284.1	302.3	320.5	333812.1	6.31	W690X419	
109-1908	IZ®	203	75.1	107.6	111.2	114.8	1968.9	20.08	W14X605	W1 (PZC 13)
		10913.4	1908	525.5	542.9	560.4	268867.4	6.12	W360X900	
110-1867	IZ®	205.1	73.5	47.1	50.8	54.4	2699.2	22.01	W33X221	W1 (PZC 13)
		11028	1867	230.1	247.9	265.8	368593.3	6.71	W840X329	
110-1774	IZ®	205.2	69.8	44.9	48.7	52.6	2796.6	21.23	W36X194	W1 (PZC 13)
		11032.1	1774	219.2	237.9	256.7	381905.6	6.47	W920X289	
111-1809	IZ®	206.5	71.2	67.7	71.5	75.3	2420.7	20.08	W24X335	W1 (PZC 13)
		11104.3	1809	330.8	349.2	367.6	330574.6	6.12	W610X498	
113-1851	IZ®	210.8	72.9	54.1	57.8	61.5	2688.3	21.39	W30X261	W1 (PZC 13)
		11332.3	1851	264.3	282.3	300.3	367115.5	6.52	W760X389	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
116-1833	IZ®	215.3	72.2	62.3	66	69.7	2659.3	20.77	W27X307	W1 (PZC 13)
		11575	1833	304.2	322.3	340.5	363157.5	6.33	W690X457	
116-1775	IZ®	215.9	69.9	47.7	51.5	55.4	3006.6	21.26	W36X210	W1 (PZC 13)
		11606.2	1775	232.7	251.5	270.3	410581.2	6.48	W920X313	
117-1869	IZ®	218.1	73.6	50.3	54	57.6	2934.8	22.08	W33X241	W1 (PZC 13)
		11726.3	1869	245.8	263.6	281.4	400771.3	6.73	W840X359	
118-1766	IZ®	219.3	69.5	43.2	47	50.9	3120	21.56	W40X183	W1 (PZC 13)
		11791.7	1766	210.8	229.7	248.5	426058.3	6.57	W1000X272	
119-1914	IZ®	222	75.4	116.5	120.1	123.7	2237.3	20.24	W14X665	W1 (PZC 13)
		11938	1914	569	586.4	603.8	305524.7	6.17	W360X990	
120-1813	IZ®	223.1	71.4	73.5	77.3	81.1	2689.1	20.18	W24X370	W1 (PZC 13)
		11996.7	1813	359.1	377.4	395.8	367224.5	6.15	W610X551	
120-1884	IZ®	223.5	74.2	48.1	51.7	55.3	3109.8	22.57	W36X230	W1 (PZC 13)
		12015.5	1884	234.7	252.4	270	424676.7	6.88	W920X342	
120-1866	IZ®	223.5	73.5	43.4	47.1	50.8	3216.8	22.8	W40X199	W1 (PZC 13)
		12016.4	1866	212.1	230	247.8	439283.1	6.95	W1000X296	
123-1853	IZ®	229.3	73	59.1	62.8	66.5	3010.4	21.46	W30X292	W1 (PZC 13)
		12328.9	1853	288.6	306.6	324.5	411097.4	6.54	W760X434	
124-1836	IZ®	230.8	72.3	67	70.7	74.4	2921.2	20.87	W27X336	W1 (PZC 13)
		12407.2	1836	327.2	345.3	363.5	398919.6	6.36	W690X500	
126-1885	IZ®	234	74.2	50.5	54.1	57.8	3309.2	22.6	W36X245	W1 (PZC 13)
		12580.6	1885	246.6	264.3	282	451905.7	6.89	W920X365	
126-1774	IZ®	234.4	69.8	51.3	55.2	59	3362.7	21.29	W36X232	W1 (PZC 13)
		12603.1	1774	250.6	269.3	288.1	459211.7	6.49	W920X345	
126-1867	IZ®	234.7	73.5	54	57.7	61.3	3237.2	22.08	W33X263	W1 (PZC 13)
		12617.1	1867	263.7	281.6	299.4	442066.9	6.73	W840X392	
129-1766	IZ®	239.7	69.5	48	51.9	55.7	3549.4	21.59	W40X211	W1 (PZC 13)
		12885.5	1766	234.4	253.2	272.1	484704.9	6.58	W1000X314	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
130-1866	IZ®	240.9	73.5	46.2	49.9	53.5	3553.1	22.87	W40X215	W1 (PZC 13)
		12950.4	1866	225.6	243.4	261.3	485205	6.97	W1000X321	
131-1920	IZ®	244	75.6	126.2	129.8	133.3	2551.4	20.41	W14X730	W1 (PZC 13)
		13118.4	1920	616.2	633.6	650.9	348420.9	6.22	W360X1086	
131-1886	IZ®	244.3	74.3	52.9	56.5	60.1	3509.3	22.64	W36X260	W1 (PZC 13)
		13133.8	1886	258.2	275.8	293.5	479222.9	6.9	W920X387	
133-1838	IZ®	247.2	72.4	72.3	76	79.7	3204.6	20.93	W27X368	W1 (PZC 13)
		13287.8	1838	352.9	371	389.1	437622.1	6.38	W690X548	
133-1856	IZ®	247.9	73.1	64.6	68.2	71.9	3346.3	21.56	W30X326	W1 (PZC 13)
		13330.4	1856	315.2	333.1	351.1	456962.5	6.57	W760X484	
135-1776	IZ®	250.5	69.9	55.5	59.4	63.2	3692.7	21.36	W36X256	W1 (PZC 13)
		13470.1	1776	271.1	289.8	308.6	504268.9	6.51	W920X381	
135-1870	IZ®	251.8	73.6	58.5	62.1	65.8	3562.8	22.18	W33X291	W1 (PZC 13)
		13538.7	1870	285.6	303.4	321.2	486536.6	6.76	W840X433	
138-1768	IZ®	256.8	69.6	52	55.9	59.8	3916.3	21.65	W40X235	W1 (PZC 13)
		13806.8	1768	254.1	272.9	291.8	534811.6	6.6	W1000X350	
139-1888	IZ®	258.6	74.3	56.1	59.8	63.4	3791.7	22.7	W36X280	W1 (PZC 13)
		13904.4	1888	274.1	291.7	309.4	517789.3	6.92	W920X417	
141-1937	IZ®	261.3	76.3	137.6	141.1	144.6	2799.2	20.57	W14X808	W1 (PZC 13)
		14050.5	1937	671.6	688.8	706	382251.7	6.27	W360X1202	
143-1866	IZ®	265.2	73.5	51.7	55.4	59	4065.6	22.9	W40X249	W1 (PZC 13)
		14259.2	1866	252.5	270.4	288.2	555193.4	6.98	W1000X371	
143-1859	IZ®	265.9	73.2	69.6	73.2	76.9	3675.6	21.65	W30X357	W1 (PZC 13)
		14293.6	1859	339.6	357.5	375.4	501939.4	6.6	W760X531	
145-1872	IZ®	268.7	73.7	62.8	66.4	70.1	3888	22.24	W33X318	W1 (PZC 13)
		14446.4	1872	306.6	324.4	342.2	530939.6	6.78	W840X473	
146-1889	IZ®	271.5	74.4	59.3	63	66.6	4047.6	22.74	W36X300	W1 (PZC 13)
		14596.9	1889	289.8	307.4	325	552733.7	6.93	W920X446	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
147-1866	IZ®	273.1	73.5	48.6	52.3	55.9	4446.9	23.49	W44X230	W1 (PZC 13)
		14685.4	1866	237.4	255.2	273.1	607266.8	7.16	W1100X343	
148-1769	IZ®	274.4	69.6	57	60.9	64.7	4312.5	21.72	W40X264	W1 (PZC 13)
		14753.3	1769	278.3	297.2	316	588910	6.62	W1000X393	
152-1770	IZ®	283.3	69.7	59.5	63.4	67.2	4514.5	21.72	W40X278	W1 (PZC 13)
		15232.7	1770	290.6	309.4	328.2	616491.6	6.62	W1000X415	
153-1862	IZ®	284.6	73.3	75.1	78.8	82.5	4028.3	21.72	W30X391	W1 (PZC 13)
		15298.9	1862	366.9	384.8	402.7	550101.1	6.62	W760X582	
153-1868	IZ®	284.6	73.5	56.1	59.8	63.4	4481.7	22.97	W40X277	W1 (PZC 13)
		15300	1868	274.1	291.9	309.8	612018.6	7	W1000X412	
156-1875	IZ®	290.1	73.8	68.5	72.2	75.8	4310.8	22.31	W33X354	W1 (PZC 13)
		15598.4	1875	334.6	352.4	370.1	588679.2	6.8	W840X527	
156-1888	IZ®	290.2	74.3	63.8	67.4	71	4427.5	22.77	W36X328	W1 (PZC 13)
		15603.1	1888	311.5	329.2	346.8	604617.6	6.94	W920X488	
159-1868	IZ®	295.1	73.5	59.5	63.1	66.8	4725.7	22.97	W40X297	W1 (PZC 13)
		15868	1868	290.5	308.3	326.1	645337.4	7	W1000X443	
162-1866	IZ®	300.6	73.5	53.9	57.5	61.2	5069.6	23.56	W44X262	W1 (PZC 13)
		16163	1866	263	280.9	298.7	692294.6	7.18	W1100X390	
166-1891	IZ®	308.9	74.4	68.6	72.2	75.8	4815.7	22.83	W36X359	W1 (PZC 13)
		16607.8	1891	335.1	352.7	370.3	657626.8	6.96	W920X534	
167-1877	IZ®	309.7	73.9	73.9	77.5	81.1	4709.4	22.41	W33X387	W1 (PZC 13)
		16652.1	1877	360.6	378.4	396.1	643115.7	6.83	W840X576	
170-1870	IZ®	315.2	73.6	63.8	67.5	71.1	5160.5	23.06	W40X324	W1 (PZC 13)
		16948.9	1870	311.6	329.4	347.2	704716.4	7.03	W1000X483	
171-1774	IZ®	317.3	69.8	67.6	71.5	75.3	5273.6	21.85	W40X327	W1 (PZC 13)
		17057.2	1774	330.2	349	367.8	720157.6	6.66	W1000X486	
172-1775	IZ®	318.9	69.9	68.5	72.3	76.2	5315.6	21.88	W40X331	W1 (PZC 13)
		17146.9	1775	334.5	353.2	372	725896.6	6.67	W1000X494	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ® BNS®

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	in (mm)	
173-1868	IZ®	322.4	73.5	58.6	62.2	65.9	5583.9	23.62	W44X290	W1 (PZC 13)
		17331.8	1868	285.9	303.7	321.5	762526.9	7.2	W1100X433	
178-1893	IZ®	330.4	74.5	74.2	77.8	81.4	5272.4	22.93	W36X393	W1 (PZC 13)
		17763.8	1893	362.1	379.7	397.3	719989.6	6.99	W920X585	
180-1853	IZ®	335.1	73	99.5	103.2	106.9	4834.4	21.39	W27X539	W1 (PZC 13)
		18015.5	1853	486	504	522	660186.9	6.52	W690X802	
182-1873	IZ®	339.4	73.7	69.9	73.5	77.2	5706.9	23.13	W40X362	W1 (PZC 13)
		18244.8	1873	341.3	359	376.8	779334.1	7.05	W1000X539	
185-1874	IZ®	344.7	73.8	71.5	75.1	78.8	5831.5	23.16	W40X372	W1 (PZC 13)
		18530.7	1874	349	366.8	384.6	796342	7.06	W1000X554	
188-1871	IZ®	350	73.7	65.4	69.1	72.7	6264.2	23.69	W44X335	W1 (PZC 13)
		18816.2	1871	319.4	337.2	355	855427	7.22	W1100X499	
193-1897	IZ®	359	74.7	81.3	84.9	88.5	5883.9	23.03	W36X439	W1 (PZC 13)
		19303.6	1897	397	414.5	432.1	803503.4	7.02	W920X653	
194-1780	IZ®	361.3	70.1	78.7	82.5	86.4	6294.7	22.05	W40X392	W1 (PZC 13)
		19425.6	1780	384.2	402.9	421.6	859599.8	6.72	W1000X584	
195-1875	IZ®	363.3	73.8	75.5	79.1	82.8	6251.3	23.2	W40X397	W1 (PZC 13)
		19532.1	1875	368.5	386.3	404.1	853675.3	7.07	W1000X591	
207-1878	IZ®	384.6	73.9	80.9	84.6	88.2	6745.5	23.29	W40X431	W1 (PZC 13)
		20678.3	1878	395.1	412.8	430.6	921161.8	7.1	W1000X642	
223-1903	IZ®	414.1	74.9	95.1	98.7	102.2	7103.1	23.23	W36X527	W1 (PZC 13)
		22262.1	1903	464.2	481.7	499.2	969985.6	7.08	W920X784	
233-1883	IZ®	433.4	74.1	92.4	96	99.7	7897.7	23.46	W40X503	W1 (PZC 13)
		23300	1883	451.2	468.9	486.5	1078496.9	7.15	W1000X748	
264-1912	IZ®	490.1	75.3	114.1	117.7	121.3	8864.3	23.49	W36X650	W1 (PZC 13)
		26350.7	1912	557.2	574.7	592.1	1210497.7	7.16	W920X967	
266-1890	IZ®	495	74.4	107	110.6	114.2	9397.8	23.65	W40X593	W1 (PZC 13)
		26611.7	1890	522.2	539.8	557.4	1283354.3	7.21	W1000X883	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ®.



Hot rolled and 100% melted and manufactured
in the USA and BABA2021 Compliant

IZ[®] BNS[®]

sheet-pile.com/iz



BALL & SOCKET
HOT ROLLED / MULTI-USE

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area	Diameter	Configuration
				60%	80%	100%				
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	in (mm)	
314-1923	IZ [®]	584.1	75.7	136.9	140.4	144	11151.4	23.82	W36X798	W1 (PZC 13)
		31403.5	1923	668.4	685.7	703	1522820.6	7.26	W920X1188	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ[®].

Specifications

When using steel sheet pile, it is necessary to make allowances for deviations from theoretical exactness. The degree of precision obtainable in the production of sheet pile is limited by the basic character of the rolling processes and normal limitations of mill equipment. Care must be taken during installation to assure that each element is being set at the desired driving dimension.

- Dimensions typically shown are nominal.
- Actual thicknesses vary due to mill rolling practices; however, permitted variations for such dimensions are not addressed.
- Interlocks should be reasonably free-sliding when threaded.
- Terms, tolerance, dimensions, and delivery conditions are in accordance with EN 10248 and/or ASTM A6.
- Welding is in accordance with AWS D1.1.

	AMERICAN ASTM A 6		EUROPEAN EN 10248
Mass	5%	-2.5%	± 5%
Length	+ 5in.	-0 in.	± 200mm
Height			± 7mm
Thickness			± 0.5mm for ≤ 8.5mm ± 6% for > 8.5mm
Width Interlocked			± 3%
Straightness			0.2% of the length
Ends ou of Square			2% of the width

Available Steel Grades

AMERICAN			CANADIAN			EUROPEAN		
ASTM	YIELD STRENGTH		CSA G40.21	YIELD STRENGTH		EN 10248	YIELD STRENGTH	
	(ksi)	(MPa)		(ksi)	(MPa)		(ksi)	(MPa)
A 328	39	270	Grade 260 W	38	260	S 240 GP	35	240
A 572 Grade 42	42	290	Grade 300 W	44	300	S 270 GP	39	270
A 572 Grade 50	50	345	Grade 355 W	50	350	S 320 GP	46	320
A 572 Grade 55	55	380	Grade 400 W	58	400	S 355 GP	51	355
A 572 Grade 60	60	415				S 390 GP	57	390
A 572 Grade 65*	65	450				S 430 GP	62	430
A 588 Grade 50	50	345				S 450 GP*	65	450
API 5L x70	70	485						
ASTM A 690 MARINER®	50	345						

ENGINEERING DISCLAIMER

This publication contains information on the properties of hot-rolled sheet pile based on accepted engineering practices related to sheet pile products and projects. The use of the data contained herein must be supplemented with qualified professional judgment.

LEGAL DISCLAIMER

“The information, including technical and engineering data, figures, tables, designs, drawings, details, suggested procedures, and suggested specifications, presented in this publication are for general information only. While every effort has been made to ensure its accuracy, this information should not be used or relied upon for any specific application without independent competent professional examination and verification of its accuracy, suitability and applicability.

Anyone making use of the material does so at their own risk and assumes any and all liability resulting from such use. **SHEET PILE LLC DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES OF MERCHANTABILITY FITNESS FOR ANY GENERAL OR PARTICULAR PURPOSE OR FREEDOM FROM INFRINGEMENT OF ANY PATENT, TRADEMARK, OR COPYRIGHT IN REGARD TO INFORMATION OR PRODUCTS CONTAINED OR REFERRED TO HEREIN.** Nothing herein contained shall be construed as granting a license, express or implied, under any patents.

These brands and products are supplied exclusively by or through Sheet Pile LLC.



Toll free: 866.666.7453 | +1 512.243.1228 | info@sheet-pile.com | sheet-pile.com

© 2026 Sheet Pile LLC. All rights reserved.