


OZ HR[®]

sheet-pile.com/oz


PilePro[®] Sheet Pile Connectors

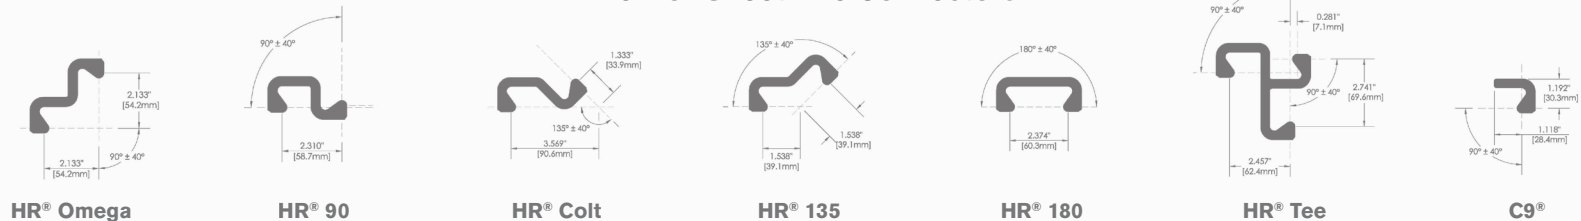

Sheet Pile LLC is the owner and assignee of US 7,390,145, related to these connectors.




Configuration A2

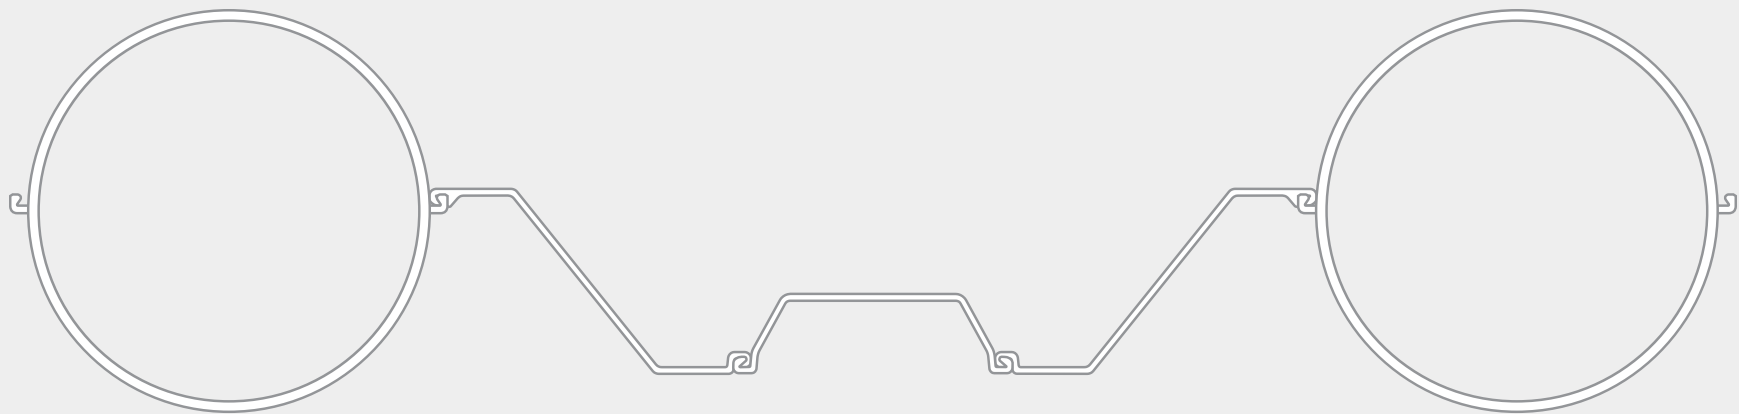

SECTION NAME:

78 - 2527



Section width in mm

Section modulus (elastic) in $\text{cm}^3/\text{m} \div 100$

These are examples from a large variety of possible OZ® solutions.

Please configure your own system on sheet-pile.com/oz

Sheet Pile LLC is the owner and assignee of numerous patents and trademarks related to the OZ® system, including, but not limited to, United States Patent Nos. 8,088,469, 8,323,765, and 7,935,406.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
27-2863	OZ®	51.1	112.71	0.5	31	28.3	31.7	35.2	818.3	13.01	26.23	A2
		2749.6	2862.8	12.7	812	138	154.8	171.6	111744.4	3.97	7.99	
28-2812	OZ®	51.9	110.71	0.562	30	29.7	33.2	36.7	778.7	12.75	25.7	A2
		2791	2812	14.288	762	145.1	162.2	179.3	106337.1	3.89	7.83	
28-2761	OZ®	51.9	108.71	0.625	28	30.9	34.5	38.1	726.9	12.49	25.18	A2
		2791.3	2761.2	15.875	711	150.9	168.4	185.8	99259.7	3.81	7.67	
28-3015	OZ®	52	118.71	0.394	38	25.8	29.1	32.4	987.7	13.8	27.8	A2
		2794.8	3015.2	10	965	126	142	158	134876.6	4.21	8.47	
28-2914	OZ®	52.6	114.71	0.472	34	27.9	31.3	34.6	893.5	13.28	26.75	A2
		2825.6	2913.6	12	863	136.1	152.6	169.1	122009.9	4.05	8.15	
28-2660	OZ®	52.8	104.71	0.812	24	34.2	37.9	41.6	633.7	11.97	24.13	A2
		2839.3	2659.6	20.638	609	167	185.1	203.2	86541.6	3.65	7.36	
28-2964	OZ®	53	116.71	0.438	36	27.1	30.4	33.7	953.7	13.54	27.27	A2
		2848.5	2964.4	11.112	914	132.2	148.5	164.7	130234.4	4.13	8.31	
29-3066	OZ®	53.2	120.71	0.375	40	25.4	28.7	31.9	1064.7	14.06	28.32	A2
		2862.1	3066	9.525	1016	124.2	139.9	155.7	145396.6	4.29	8.63	
29-2710	OZ®	54.3	106.71	0.75	26	33.7	37.3	41	706.4	12.23	24.65	A2
		2921.3	2710.4	19.05	660	164.5	182.2	200	96460	3.73	7.51	
30-2914	OZ®	55	114.71	0.5	34	28.9	32.3	35.7	934.2	13.28	26.75	A2
		2954.6	2913.6	12.7	863	141.1	157.6	174.1	127580	4.05	8.15	
30-2660	OZ®	55.4	104.71	0.875	24	35.9	39.6	43.3	665	11.97	24.13	A2
		2979.3	2659.6	22.225	609	175.4	193.5	211.6	90808.4	3.65	7.36	
30-3066	OZ®	55.4	120.71	0.394	40	26.2	29.4	32.7	1108.8	14.06	28.32	A2
		2980.6	3066	10	1016	128	143.8	159.5	151416.5	4.29	8.63	
30-2761	OZ®	55.6	108.71	0.688	28	32.9	36.5	40	778.4	12.49	25.18	A2
		2989.1	2761.2	17.462	711	160.5	178	195.4	106292.2	3.81	7.67	
30-2863	OZ®	56	112.71	0.562	31	30.5	33.9	37.4	895.7	13.01	26.23	A2
		3009.6	2862.8	14.288	812	148.7	165.6	182.4	122311	3.97	7.99	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
30-2812	OZ®	56.2	110.71	0.625	30	31.8	35.3	38.8	842.3	12.75	25.7	A2
		3019.1	2812	15.875	762	155.3	172.4	189.5	115027	3.89	7.83	
30-2964	OZ®	56.4	116.71	0.472	36	28.4	31.8	35.1	1014.6	13.54	27.27	A2
		3030.6	2964.4	12	914	138.8	155.1	171.3	138558.6	4.13	8.31	
30-3117	OZ®	56.7	122.71	0.375	42	25.8	29	32.1	1190	14.32	28.84	A2
		3046.6	3116.8	9.525	1066	126	141.5	156.9	162505.5	4.37	8.79	
30-3015	OZ®	56.7	118.71	0.438	38	27.6	30.8	34.1	1077	13.8	27.8	A2
		3047.4	3015.2	11.112	965	134.6	150.6	166.6	147068.9	4.21	8.47	
31-2660	OZ®	58	104.71	0.938	24	37.6	41.3	45	695.7	11.97	24.13	A2
		3116.9	2659.6	23.812	609	183.7	201.8	219.9	95003.8	3.65	7.36	
32-2964	OZ®	59	116.71	0.5	36	29.5	32.8	36.2	1062.5	13.54	27.27	A2
		3173.4	2964.4	12.7	914	144	160.3	176.5	145089.1	4.13	8.31	
32-3117	OZ®	59.1	122.71	0.394	42	26.6	29.8	33	1240.3	14.32	28.84	A2
		3175.5	3116.8	10	1066	130	145.4	160.9	169379.5	4.37	8.79	
32-2761	OZ®	59.2	108.71	0.75	28	34.8	38.4	42	829.1	12.49	25.18	A2
		3184.1	2761.2	19.05	711	170.1	187.5	205	113226.1	3.81	7.67	
32-3168	OZ®	60.2	124.71	0.375	43	26.2	29.3	32.4	1325.4	14.59	29.37	A2
		3239.1	3167.6	9.525	1117	127.8	143	158.2	180998.2	4.45	8.95	
32-2812	OZ®	60.3	110.71	0.688	30	33.9	37.4	40.9	905.1	12.75	25.7	A2
		3244.2	2812	17.462	762	165.4	182.5	199.7	123604.2	3.89	7.83	
32-2914	OZ®	60.4	114.71	0.562	34	31.2	34.6	38	1026	13.28	26.75	A2
		3244.8	2913.6	14.288	863	152.3	168.8	185.4	140108.8	4.05	8.15	
32-3015	OZ®	60.4	118.71	0.472	38	29	32.2	35.5	1147.7	13.8	27.8	A2
		3247.7	3015.2	12	965	141.5	157.4	173.4	156733.6	4.21	8.47	
33-2660	OZ®	60.5	104.71	1	24	39.3	43	46.7	725.9	11.97	24.13	A2
		3252.3	2659.6	25.4	609	191.9	210	228.1	99128.8	3.65	7.36	
33-3066	OZ®	60.6	120.71	0.438	40	28	31.3	34.5	1211.6	14.06	28.32	A2
		3256.9	3066	11.112	1016	136.9	152.7	168.4	165448.1	4.29	8.63	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
33-2863	OZ®	60.8	112.71	0.625	31	32.7	36.1	39.5	972.1	13.01	26.23	A2
		3266.5	2862.8	15.875	812	159.5	176.3	193.1	132750.5	3.97	7.99	
34-2761	OZ®	62.8	108.71	0.812	28	36.8	40.4	43.9	879.2	12.49	25.18	A2
		3376.3	2761.2	20.638	711	179.6	197.1	214.5	120062.7	3.81	7.67	
34-3168	OZ®	62.8	124.71	0.394	43	27	30.1	33.2	1382.5	14.59	29.37	A2
		3378.6	3167.6	10	1117	131.8	147.1	162.3	188795.3	4.45	8.95	
34-3015	OZ®	63.3	118.71	0.5	38	30.1	33.4	36.6	1203.3	13.8	27.8	A2
		3404.8	3015.2	12.7	965	146.9	162.8	178.8	164317.8	4.21	8.47	
35-2812	OZ®	64.5	110.71	0.75	30	35.9	39.5	43	967.1	12.75	25.7	A2
		3466.4	2812	19.05	762	175.5	192.6	209.8	132069.3	3.89	7.83	
35-3066	OZ®	64.7	120.71	0.472	40	29.5	32.7	35.9	1293	14.06	28.32	A2
		3475.9	3066	12	1016	144	159.7	175.4	176574.7	4.29	8.63	
35-3117	OZ®	64.7	122.71	0.438	42	28.5	31.7	34.8	1357.7	14.32	28.84	A2
		3475.9	3116.8	11.112	1066	139.2	154.6	170.1	185406.8	4.37	8.79	
35-2964	OZ®	65	116.71	0.562	36	31.9	35.2	38.6	1170.1	13.54	27.27	A2
		3494.9	2964.4	14.288	914	155.7	172	188.2	159785.8	4.13	8.31	
35-2863	OZ®	65.5	112.71	0.688	31	34.8	38.3	41.7	1047.6	13.01	26.23	A2
		3520.3	2862.8	17.462	812	170.1	186.9	203.8	143063.1	3.97	7.99	
35-2914	OZ®	65.7	114.71	0.625	34	33.5	36.9	40.3	1116.7	13.28	26.75	A2
		3531.6	2913.6	15.875	863	163.5	180	196.6	152495.9	4.05	8.15	
36-2761	OZ®	66.3	108.71	0.875	28	38.7	42.3	45.9	928.6	12.49	25.18	A2
		3565.9	2761.2	22.225	711	189.1	206.5	224	126802.8	3.81	7.67	
36-3269	OZ®	67.8	128.71	0.375	48	26.9	29.9	32.9	1627.4	15.11	30.41	A2
		3645.7	3269.2	9.525	1219	131.1	145.8	160.6	222239.4	4.61	9.27	
36-3066	OZ®	67.8	120.71	0.5	40	30.6	33.9	37.1	1357	14.06	28.32	A2
		3647.8	3066	12.7	1016	149.6	165.3	181	185308.2	4.29	8.63	
37-2812	OZ®	68.6	110.71	0.812	30	38	41.5	45	1028.3	12.75	25.7	A2
		3685.7	2812	20.638	762	185.6	202.7	219.8	140424.3	3.89	7.83	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)				
37-3168	OZ [®]	68.9	124.71	0.438	43	28.9	32.1	35.2	1515.7	14.59	29.37	A2
		3704	3167.6	11.112	1117	141.3	156.5	171.8	206977.2	4.45	8.95	
37-3117	OZ [®]	69.1	122.71	0.472	42	30	33.2	36.3	1450.8	14.32	28.84	A2
		3714.3	3116.8	12	1066	146.5	162	177.4	198119.2	4.37	8.79	
38-2761	OZ [®]	69.8	108.71	0.938	28	40.7	44.2	47.8	977.2	12.49	25.18	A2
		3752.7	2761.2	23.812	711	198.5	216	233.4	133447.4	3.81	7.67	
38-3015	OZ [®]	69.9	118.71	0.562	38	32.6	35.8	39.1	1328.3	13.8	27.8	A2
		3758.7	3015.2	14.288	965	159	175	191	181392.9	4.21	8.47	
38-2863	OZ [®]	70.1	112.71	0.75	31	37	40.5	43.9	1122.2	13.01	26.23	A2
		3770.9	2862.8	19.05	812	180.7	197.6	214.4	153250	3.97	7.99	
38-3269	OZ [®]	70.8	128.71	0.394	48	27.7	30.8	33.8	1699.6	15.11	30.41	A2
		3807.3	3269.2	10	1219	135.4	150.1	164.9	232091	4.61	9.27	
38-2964	OZ [®]	70.9	116.71	0.625	36	34.3	37.6	40.9	1276.6	13.54	27.27	A2
		3812.9	2964.4	15.875	914	167.4	183.7	199.9	174325	4.13	8.31	
38-2914	OZ [®]	71	114.71	0.688	34	35.8	39.2	42.5	1206.4	13.28	26.75	A2
		3815.2	2913.6	17.462	863	174.7	191.2	207.7	164741.9	4.05	8.15	
39-3320	OZ [®]	71.8	130.71	0.375	50	27.2	30.2	33.1	1794.4	15.37	30.94	A2
		3858.8	3320	9.525	1270	132.7	147.2	161.7	245034.6	4.68	9.43	
39-3117	OZ [®]	72.6	122.71	0.5	42	31.2	34.4	37.5	1523.9	14.32	28.84	A2
		3901.4	3116.8	12.7	1066	152.3	167.7	183.2	208100.3	4.37	8.79	
39-2812	OZ [®]	72.6	110.71	0.875	30	40.1	43.6	47.1	1088.7	12.75	25.7	A2
		3902.1	2812	22.225	762	195.6	212.7	229.8	148669.3	3.89	7.83	
39-2761	OZ [®]	73.2	108.71	1	28	42.6	46.2	49.7	1025.2	12.49	25.18	A2
		3936.9	2761.2	25.4	711	207.9	225.3	242.8	139997.1	3.81	7.67	
40-3168	OZ [®]	73.7	124.71	0.472	43	30.5	33.6	36.7	1621.3	14.59	29.37	A2
		3962.1	3167.6	12	1117	148.9	164.1	179.3	221402.6	4.45	8.95	
40-2863	OZ [®]	74.7	112.71	0.812	31	39.2	42.6	46.1	1195.9	13.01	26.23	A2
		4018.5	2862.8	20.638	812	191.3	208.1	224.9	163312.8	3.97	7.99	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)				
40-3320	OZ [®]	75	130.71	0.394	50	28.1	31.1	34	1874.8	15.37	30.94	A2
		4031.8	3320	10	1270	137.1	151.6	166.1	256020.5	4.68	9.43	
40-3066	OZ [®]	75.1	120.71	0.562	40	33.2	36.4	39.7	1501	14.06	28.32	A2
		4035	3066	14.288	1016	162.2	178	193.7	204978.5	4.29	8.63	
41-3371	OZ [®]	75.9	132.71	0.375	52	27.5	30.4	33.3	1972.1	15.63	31.46	A2
		4078	3370.8	9.525	1320	134.2	148.5	162.8	269308.2	4.76	9.59	
41-2914	OZ [®]	76.2	114.71	0.75	34	38	41.4	44.8	1295	13.28	26.75	A2
		4095.6	2913.6	19.05	863	185.8	202.3	218.8	176847.9	4.05	8.15	
41-3015	OZ [®]	76.4	118.71	0.625	38	35.1	38.3	41.6	1452.1	13.8	27.8	A2
		4108.9	3015.2	15.875	965	171.2	187.2	203.1	198295.3	4.21	8.47	
41-2812	OZ [®]	76.6	110.71	0.938	30	42.1	45.6	49.1	1148.3	12.75	25.7	A2
		4115.6	2812	23.812	762	205.5	222.7	239.8	156805.8	3.89	7.83	
41-2964	OZ [®]	76.8	116.71	0.688	36	36.7	40	43.3	1381.9	13.54	27.27	A2
		4127.5	2964.4	17.462	914	179	195.3	211.5	188708.3	4.13	8.31	
42-3168	OZ [®]	77.5	124.71	0.5	43	31.7	34.8	37.9	1704.3	14.59	29.37	A2
		4164.8	3167.6	12.7	1117	154.9	170.1	185.3	232731.1	4.45	8.95	
42-3269	OZ [®]	77.8	128.71	0.438	48	29.8	32.8	35.8	1867.9	15.11	30.41	A2
		4184.3	3269.2	11.112	1219	145.5	160.2	174.9	255072.8	4.61	9.27	
43-3371	OZ [®]	79.3	132.71	0.394	52	28.4	31.3	34.3	2061.4	15.63	31.46	A2
		4262.6	3370.8	10	1320	138.8	153.1	167.3	281501.7	4.76	9.59	
43-2863	OZ [®]	79.3	112.71	0.875	31	41.3	44.8	48.2	1268.7	13.01	26.23	A2
		4263.1	2862.8	22.225	812	201.8	218.7	235.5	173252.1	3.97	7.99	
43-3422	OZ [®]	80	134.71	0.375	53	27.8	30.7	33.6	2160.8	15.89	31.98	A2
		4302.7	3421.6	9.525	1371	135.7	149.8	163.9	295080.7	4.84	9.75	
43-3117	OZ [®]	80.4	122.71	0.562	42	33.9	37	40.2	1688.6	14.32	28.84	A2
		4323	3116.8	14.288	1066	165.3	180.8	196.2	230587.5	4.37	8.79	
43-2812	OZ [®]	80.5	110.71	1	30	44.1	47.6	51.1	1207.1	12.75	25.7	A2
		4326.4	2812	25.4	762	215.5	232.6	249.7	164834.3	3.89	7.83	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	
44-2914	OZ®	81.3	114.71	0.812	34	40.3	43.7	47.1	1382.7	13.28	26.75	A2
		4372.7	2913.6	20.638	863	196.8	213.4	229.9	188814.9	4.05	8.15	
44-3066	OZ®	82.2	120.71	0.625	40	35.8	39	42.2	1643.7	14.06	28.32	A2
		4418.5	3066	15.875	1016	174.8	190.5	206.2	224459.9	4.29	8.63	
44-3320	OZ®	82.5	130.71	0.438	50	30.2	33.2	36.1	2062.5	15.37	30.94	A2
		4435.5	3320	11.112	1270	147.4	161.9	176.4	281653	4.68	9.43	
44-2964	OZ®	82.6	116.71	0.75	36	39	42.4	45.7	1486.1	13.54	27.27	A2
		4438.7	2964.4	19.05	914	190.6	206.9	223.1	202936.5	4.13	8.31	
45-3015	OZ®	82.9	118.71	0.688	38	37.5	40.8	44.1	1574.6	13.8	27.8	A2
		4455.6	3015.2	17.462	965	183.3	199.3	215.2	215025.9	4.21	8.47	
45-3269	OZ®	83.4	128.71	0.472	48	31.4	34.5	37.5	2001.4	15.11	30.41	A2
		4483.5	3269.2	12	1219	153.5	168.2	182.9	273314.9	4.61	9.27	
45-3422	OZ®	83.7	134.71	0.394	53	28.7	31.6	34.5	2259.5	15.89	31.98	A2
		4499.2	3421.6	10	1371	140.4	154.4	168.5	308555.6	4.84	9.75	
45-2863	OZ®	83.8	112.71	0.938	31	43.5	46.9	50.4	1340.6	13.01	26.23	A2
		4504.6	2862.8	23.812	812	212.3	229.1	246	183068.7	3.97	7.99	
45-3472	OZ®	84.3	136.71	0.375	56	28.1	30.9	33.8	2360.7	16.16	32.51	A2
		4532.8	3472.4	9.525	1422	137.2	151.1	164.9	322371.6	4.92	9.91	
46-3168	OZ®	86	124.71	0.562	43	34.5	37.6	40.7	1891.2	14.59	29.37	A2
		4621.7	3167.6	14.288	1117	168.3	183.5	198.7	258261.5	4.45	8.95	
46-2914	OZ®	86.4	114.71	0.875	34	42.6	46	49.3	1469.3	13.28	26.75	A2
		4646.7	2913.6	22.225	863	207.9	224.4	240.9	200644.2	4.05	8.15	
47-3371	OZ®	87.3	132.71	0.438	52	30.6	33.5	36.4	2269.8	15.63	31.46	A2
		4693.5	3370.8	11.112	1320	149.3	163.6	177.9	309955.8	4.76	9.59	
47-3269	OZ®	87.8	128.71	0.5	48	32.7	35.7	38.8	2106.4	15.11	30.41	A2
		4718.6	3269.2	12.7	1219	159.8	174.5	189.2	287645.9	4.61	9.27	
47-3117	OZ®	88.2	122.71	0.625	42	36.5	39.7	42.9	1851.7	14.32	28.84	A2
		4740.7	3116.8	15.875	1066	178.4	193.8	209.3	252869	4.37	8.79	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)				
47-3472	OZ [®]	88.2	136.71	0.394	56	29.1	31.9	34.7	2469.3	16.16	32.51	A2
		4741.3	3472.4	10	1422	141.9	155.8	169.7	337202.8	4.92	9.91	
47-2863	OZ [®]	88.2	112.71	1	31	45.6	49.1	52.5	1411.6	13.01	26.23	A2
		4743.2	2862.8	25.4	812	222.8	239.6	256.4	192764.1	3.97	7.99	
47-2964	OZ [®]	88.3	116.71	0.812	36	41.4	44.7	48.1	1589.1	13.54	27.27	A2
		4746.5	2964.4	20.638	914	202.2	218.4	234.7	217011.2	4.13	8.31	
48-3320	OZ [®]	88.5	130.71	0.472	50	31.9	34.9	37.8	2211.5	15.37	30.94	A2
		4756	3320	12	1270	155.7	170.2	184.7	302003.6	4.68	9.43	
48-3066	OZ [®]	89.2	120.71	0.688	40	38.4	41.6	44.8	1785	14.06	28.32	A2
		4798.3	3066	17.462	1016	187.4	203.1	218.8	243753.4	4.29	8.63	
48-3015	OZ [®]	89.3	118.71	0.75	38	40	43.3	46.6	1695.9	13.8	27.8	A2
		4798.7	3015.2	19.05	965	195.3	211.3	227.3	231586.3	4.21	8.47	
49-2914	OZ [®]	91.5	114.71	0.938	34	44.8	48.2	51.6	1554.9	13.28	26.75	A2
		4917.5	2913.6	23.812	863	218.9	235.4	251.9	212336.6	4.05	8.15	
50-3422	OZ [®]	92.2	134.71	0.438	53	31	33.8	36.7	2489.8	15.89	31.98	A2
		4957.8	3421.6	11.112	1371	151.2	165.3	179.3	340005.6	4.84	9.75	
50-3320	OZ [®]	93.1	130.71	0.5	50	33.2	36.2	39.1	2328.6	15.37	30.94	A2
		5007.8	3320	12.7	1270	162.1	176.6	191.1	317993.4	4.68	9.43	
50-3371	OZ [®]	93.7	132.71	0.472	52	32.3	35.2	38.2	2435.2	15.63	31.46	A2
		5035.6	3370.8	12	1320	157.8	172.1	186.3	332551	4.76	9.59	
51-2964	OZ [®]	93.9	116.71	0.875	36	43.8	47.1	50.4	1691.1	13.54	27.27	A2
		5051	2964.4	22.225	914	213.7	229.9	246.2	230933.1	4.13	8.31	
51-3168	OZ [®]	94.4	124.71	0.625	43	37.2	40.3	43.5	2076.5	14.59	29.37	A2
		5074.6	3167.6	15.875	1117	181.8	197	212.2	283569.3	4.45	8.95	
51-3015	OZ [®]	95.6	118.71	0.812	38	42.5	45.7	49	1815.9	13.8	27.8	A2
		5138.4	3015.2	20.638	965	207.4	223.3	239.3	247977.2	4.21	8.47	
52-3117	OZ [®]	95.9	122.71	0.688	42	39.2	42.4	45.5	2013.4	14.32	28.84	A2
		5154.6	3116.8	17.462	1066	191.3	206.8	222.2	274946.4	4.37	8.79	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
						60%	80%	100%				
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	
52-3066	OZ [®]	96.2	120.71	0.75	40	40.9	44.2	47.4	1924.9	14.06	28.32	A2
		5174.4	3066	19.05	1016	199.9	215.6	231.3	262860.7	4.29	8.63	
52-2914	OZ [®]	96.4	114.71	1	34	47.1	50.5	53.8	1639.5	13.28	26.75	A2
		5185.1	2913.6	25.4	863	229.8	246.3	262.9	223893.5	4.05	8.15	
52-3472	OZ [®]	97.2	136.71	0.438	56	31.3	34.2	37	2722.8	16.16	32.51	A2
		5228.1	3472.4	11.112	1422	153	166.9	180.7	371821.5	4.92	9.91	
52-3269	OZ [®]	97.6	128.71	0.562	48	35.7	38.7	41.7	2343	15.11	30.41	A2
		5248.7	3269.2	14.288	1219	174.1	188.8	203.5	319960.2	4.61	9.27	
53-3371	OZ [®]	98.7	132.71	0.5	52	33.7	36.6	39.5	2565.2	15.63	31.46	A2
		5304.5	3370.8	12.7	1320	164.4	178.7	193	350306.5	4.76	9.59	
53-3422	OZ [®]	99	134.71	0.472	53	32.7	35.6	38.5	2672.7	15.89	31.98	A2
		5322	3421.6	12	1371	159.8	173.9	188	364982.2	4.84	9.75	
54-2964	OZ [®]	99.6	116.71	0.938	36	46.1	49.4	52.8	1791.9	13.54	27.27	A2
		5352.2	2964.4	23.812	914	225.2	241.4	257.7	244703.1	4.13	8.31	
55-3015	OZ [®]	101.8	118.71	0.875	38	44.9	48.2	51.5	1934.7	13.8	27.8	A2
		5474.5	3015.2	22.225	965	219.3	235.3	251.3	264200.1	4.21	8.47	
55-3168	OZ [®]	102.7	124.71	0.688	43	40	43.1	46.2	2260.2	14.59	29.37	A2
		5523.6	3167.6	17.462	1117	195.2	210.4	225.6	308656.4	4.45	8.95	
55-3066	OZ [®]	103.2	120.71	0.812	40	43.5	46.7	49.9	2063.5	14.06	28.32	A2
		5546.9	3066	20.638	1016	212.4	228.1	243.8	281782.8	4.29	8.63	
56-3117	OZ [®]	103.5	122.71	0.75	42	41.8	45	48.2	2173.6	14.32	28.84	A2
		5564.7	3116.8	19.05	1066	204.3	219.7	235.2	296821.1	4.37	8.79	
56-3320	OZ [®]	103.7	130.71	0.562	50	36.2	39.2	42.2	2592.7	15.37	30.94	A2
		5575.7	3320	14.288	1270	176.8	191.3	205.8	354055.1	4.68	9.43	
56-3422	OZ [®]	104.3	134.71	0.5	53	34.1	37	39.9	2816.5	15.89	31.98	A2
		5608.2	3421.6	12.7	1371	166.6	180.7	194.8	384613.3	4.84	9.75	
56-3472	OZ [®]	104.4	136.71	0.472	56	33.1	36	38.8	2924.2	16.16	32.51	A2
		5614.8	3472.4	12	1422	161.8	175.7	189.6	399321.2	4.92	9.91	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
57-2964	OZ®	105.1	116.71	1	36	48.5	51.8	55.1	1891.7	13.54	27.27	A2
		5650.1	2964.4	25.4	914	236.6	252.8	269.1	258323	4.13	8.31	
58-3269	OZ®	107.4	128.71	0.625	48	38.6	41.6	44.6	2577.8	15.11	30.41	A2
		5774.6	3269.2	15.875	1219	188.3	203	217.8	352016.7	4.61	9.27	
58-3015	OZ®	108	118.71	0.938	38	47.4	50.6	53.9	2052.3	13.8	27.8	A2
		5807.2	3015.2	23.812	965	231.3	247.2	263.2	280256	4.21	8.47	
59-3371	OZ®	109.9	132.71	0.562	52	36.8	39.7	42.6	2858.6	15.63	31.46	A2
		5911	3370.8	14.288	1320	179.4	193.7	208	390362.2	4.76	9.59	
59-3066	OZ®	110	120.71	0.875	40	46	49.3	52.5	2200.7	14.06	28.32	A2
		5915.8	3066	22.225	1016	224.8	240.5	256.2	300520.9	4.29	8.63	
59-3472	OZ®	110.1	136.71	0.5	56	34.6	37.4	40.2	3082.5	16.16	32.51	A2
		5918.7	3472.4	12.7	1422	168.8	182.6	196.5	420937.4	4.92	9.91	
60-3168	OZ®	111	124.71	0.75	43	42.7	45.8	48.9	2442.3	14.59	29.37	A2
		5968.6	3167.6	19.05	1117	208.5	223.7	239	333523.5	4.45	8.95	
60-3117	OZ®	111.1	122.71	0.812	42	44.5	47.6	50.8	2332.3	14.32	28.84	A2
		5971	3116.8	20.638	1066	217.2	232.6	248.1	318494	4.37	8.79	
61-3015	OZ®	114.1	118.71	1	38	49.8	53.1	56.3	2168.6	13.8	27.8	A2
		6136.5	3015.2	25.4	965	243.2	259.1	275.1	296146.2	4.21	8.47	
61-3320	OZ®	114.2	130.71	0.625	50	39.2	42.2	45.1	2854.8	15.37	30.94	A2
		6139.3	3320	15.875	1270	191.4	205.9	220.4	389844.3	4.68	9.43	
63-3422	OZ®	116.3	134.71	0.562	53	37.3	40.2	43	3140.8	15.89	31.98	A2
		6254.1	3421.6	14.288	1371	182	196.1	210.2	428905.5	4.84	9.75	
63-3066	OZ®	116.8	120.71	0.938	40	48.6	51.8	55	2336.5	14.06	28.32	A2
		6281	3066	23.812	1016	237.2	252.9	268.6	319076.3	4.29	8.63	
63-3269	OZ®	117.1	128.71	0.688	48	41.5	44.5	47.5	2810.6	15.11	30.41	A2
		6296.2	3269.2	17.462	1219	202.5	217.2	232	383816.5	4.61	9.27	
64-3117	OZ®	118.5	122.71	0.875	42	47.1	50.3	53.4	2489.5	14.32	28.84	A2
		6373.6	3116.8	22.225	1066	230	245.5	261	339966.6	4.37	8.79	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
64-3168	OZ [®]	119.2	124.71	0.812	43	45.4	48.6	51.7	2622.8	14.59	29.37	A2
		6409.6	3167.6	20.638	1117	221.9	237.1	252.3	358171.2	4.45	8.95	
65-3371	OZ [®]	121.1	132.71	0.625	52	39.8	42.7	45.7	3149.7	15.63	31.46	A2
		6513	3370.8	15.875	1320	194.4	208.7	223	430121.3	4.76	9.59	
66-3574	OZ [®]	122	140.71	0.5	60	35.4	38.2	40.9	3659.5	16.68	33.56	A2
		6558.2	3574	12.7	1524	172.9	186.3	199.8	499735	5.08	10.23	
66-3472	OZ [®]	122.8	136.71	0.562	56	37.8	40.6	43.5	3439.7	16.16	32.51	A2
		6604.6	3472.4	14.288	1422	184.5	198.4	212.2	469716.3	4.92	9.91	
66-3066	OZ [®]	123.6	120.71	1	40	51.1	54.3	57.5	2471.1	14.06	28.32	A2
		6642.7	3066	25.4	1016	249.5	265.2	280.9	337449.9	4.29	8.63	
67-3320	OZ [®]	124.6	130.71	0.688	50	42.2	45.2	48.1	3114.8	15.37	30.94	A2
		6698.5	3320	17.462	1270	206	220.5	235	425356.3	4.68	9.43	
68-3117	OZ [®]	126	122.71	0.938	42	49.7	52.9	56.1	2645.3	14.32	28.84	A2
		6772.4	3116.8	23.812	1066	242.9	258.3	273.8	361240.1	4.37	8.79	
68-3269	OZ [®]	126.7	128.71	0.75	48	44.4	47.4	50.4	3041.6	15.11	30.41	A2
		6813.7	3269.2	19.05	1219	216.7	231.4	246.1	415362.5	4.61	9.27	
68-3168	OZ [®]	127.4	124.71	0.875	43	48.2	51.3	54.4	2801.7	14.59	29.37	A2
		6846.9	3167.6	22.225	1117	235.1	250.4	265.6	382602.9	4.45	8.95	
69-3422	OZ [®]	128.3	134.71	0.625	53	40.4	43.3	46.2	3462.9	15.89	31.98	A2
		6895.4	3421.6	15.875	1371	197.3	211.4	225.5	472884.9	4.84	9.75	
71-3371	OZ [®]	132.3	132.71	0.688	52	42.9	45.8	48.7	3438.7	15.63	31.46	A2
		7110.7	3370.8	17.462	1320	209.4	223.7	238	469589.7	4.76	9.59	
72-3117	OZ [®]	133.3	122.71	1	42	52.4	55.5	58.7	2799.6	14.32	28.84	A2
		7167.5	3116.8	25.4	1066	255.7	271.1	286.6	382316	4.37	8.79	
73-3320	OZ [®]	134.9	130.71	0.75	50	45.2	48.1	51.1	3372.9	15.37	30.94	A2
		7253.5	3320	19.05	1270	220.5	235	249.5	460597.3	4.68	9.43	
73-3168	OZ [®]	135.4	124.71	0.938	43	50.9	54	57.1	2979.1	14.59	29.37	A2
		7280.2	3167.6	23.812	1117	248.4	263.6	278.8	406820	4.45	8.95	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)				
73-3472	OZ [®]	135.5	136.71	0.625	56	41	43.8	46.7	3794.5	16.16	32.51	A2
		7285.8	3472.4	15.875	1422	200.2	214.1	227.9	518167	4.92	9.91	
73-3574	OZ [®]	136.3	140.71	0.562	60	38.8	41.5	44.3	4088	16.68	33.56	A2
		7326.1	3574	14.288	1524	189.3	202.7	216.2	558252.1	5.08	10.23	
73-3269	OZ [®]	136.3	128.71	0.812	48	47.3	50.3	53.3	3270.8	15.11	30.41	A2
		7327	3269.2	20.638	1219	230.8	245.5	260.3	446654.5	4.61	9.27	
75-3422	OZ [®]	140.1	134.71	0.688	53	43.6	46.4	49.3	3782.7	15.89	31.98	A2
		7532.1	3421.6	17.462	1371	212.7	226.7	240.8	516554.5	4.84	9.75	
77-3371	OZ [®]	143.3	132.71	0.75	52	45.9	48.9	51.8	3725.6	15.63	31.46	A2
		7703.9	3370.8	19.05	1320	224.3	238.6	252.9	508767.4	4.76	9.59	
77-3168	OZ [®]	143.4	124.71	1	43	53.6	56.7	59.8	3154.8	14.59	29.37	A2
		7709.7	3167.6	25.4	1117	261.6	276.8	292	430819.2	4.45	8.95	
78-3320	OZ [®]	145.2	130.71	0.812	50	48.1	51.1	54.1	3629	15.37	30.94	A2
		7804.2	3320	20.638	1270	235	249.6	264.1	495567.2	4.68	9.43	
78-3269	OZ [®]	145.8	128.71	0.875	48	50.2	53.2	56.2	3498.1	15.11	30.41	A2
		7836.2	3269.2	22.225	1219	244.9	259.6	274.3	477695.8	4.61	9.27	
80-3472	OZ [®]	148.1	136.71	0.688	56	44.2	47.1	49.9	4146.8	16.16	32.51	A2
		7962.4	3472.4	17.462	1422	215.9	229.7	243.6	566283.6	4.92	9.91	
81-3574	OZ [®]	150.5	140.71	0.625	60	42.1	44.9	47.6	4513.8	16.68	33.56	A2
		8089.2	3574	15.875	1524	205.6	219.1	232.6	616399.8	5.08	10.23	
82-3422	OZ [®]	151.9	134.71	0.75	53	46.7	49.6	52.5	4100.1	15.89	31.98	A2
		8164.4	3421.6	19.05	1371	227.9	242	256.1	559911.4	4.84	9.75	
83-3371	OZ [®]	154.2	132.71	0.812	52	49	51.9	54.8	4010.4	15.63	31.46	A2
		8292.8	3370.8	20.638	1320	239.2	253.5	267.7	547654.3	4.76	9.59	
83-3269	OZ [®]	155.1	128.71	0.938	48	53	56	59.1	3723.6	15.11	30.41	A2
		8341.3	3269.2	23.812	1219	258.9	273.7	288.4	508486.2	4.61	9.27	
84-3320	OZ [®]	155.3	130.71	0.875	50	51.1	54.1	57	3883.1	15.37	30.94	A2
		8350.6	3320	22.225	1270	249.5	264	278.5	530266	4.68	9.43	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
86-3472	OZ®	160.6	136.71	0.75	56	47.4	50.3	53.1	4496.8	16.16	32.51	A2
		8634.3	3472.4	19.05	1422	231.5	245.3	259.2	614074.7	4.92	9.91	
88-3422	OZ®	163.5	134.71	0.812	53	49.8	52.7	55.6	4415.4	15.89	31.98	A2
		8792.1	3421.6	20.638	1371	243.2	257.3	271.3	602961.5	4.84	9.75	
88-3269	OZ®	164.5	128.71	1	48	55.9	58.9	61.9	3947.2	15.11	30.41	A2
		8842.3	3269.2	25.4	1219	272.9	287.7	302.4	539026.8	4.61	9.27	
88-3574	OZ®	164.6	140.71	0.688	60	45.5	48.2	51	4936.9	16.68	33.56	A2
		8847.5	3574	17.462	1524	222	235.4	248.9	674178.2	5.08	10.23	
89-3371	OZ®	165.1	132.71	0.875	52	52	55	57.9	4293	15.63	31.46	A2
		8877.2	3370.8	22.225	1320	254	268.3	282.6	586250.4	4.76	9.59	
89-3320	OZ®	165.4	130.71	0.938	50	54.1	57	60	4135.2	15.37	30.94	A2
		8892.9	3320	23.812	1270	263.9	278.5	293	564696.7	4.68	9.43	
93-3472	OZ®	173	136.71	0.812	56	50.6	53.4	56.3	4844.3	16.16	32.51	A2
		9301.7	3472.4	20.638	1422	247.1	260.9	274.8	661534.7	4.92	9.91	
94-3422	OZ®	175.1	134.71	0.875	53	52.9	55.8	58.7	4728.4	15.89	31.98	A2
		9415.3	3421.6	22.225	1371	258.4	272.5	286.5	645704.6	4.84	9.75	
94-3320	OZ®	175.4	130.71	1	50	57	60	63	4385.4	15.37	30.94	A2
		9430.8	3320	25.4	1270	278.3	292.9	307.4	598858.5	4.68	9.43	
95-3371	OZ®	175.9	132.71	0.938	52	55.1	58	60.9	4573.6	15.63	31.46	A2
		9457.4	3370.8	23.812	1320	268.8	283.1	297.4	624564.8	4.76	9.59	
96-3574	OZ®	178.6	140.71	0.75	60	48.8	51.6	54.3	5357.3	16.68	33.56	A2
		9600.9	3574	19.05	1524	238.3	251.7	265.2	731587.3	5.08	10.23	
100-3472	OZ®	185.3	136.71	0.875	56	53.8	56.6	59.5	5189.5	16.16	32.51	A2
		9964.4	3472.4	22.225	1422	262.6	276.5	290.4	708669.2	4.92	9.91	
100-3371	OZ®	186.6	132.71	1	52	58.1	61	63.9	4852	15.63	31.46	A2
		10033.2	3370.8	25.4	1320	283.6	297.9	312.2	662589.4	4.76	9.59	
100-3422	OZ®	186.6	134.71	0.938	53	56	58.9	61.8	5039.2	15.89	31.98	A2
		10034.1	3421.6	23.812	1371	273.5	287.6	301.7	688140.9	4.84	9.75	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
103-3574	OZ®	192.5	140.71	0.812	60	52.1	54.9	57.6	5775	16.68	33.56	A2
		10349.4	3574	20.638	1524	254.5	268	281.5	788627	5.08	10.23	
106-3472	OZ®	197.6	136.71	0.938	56	57	59.8	62.6	5532.3	16.16	32.51	A2
		10622.6	3472.4	23.812	1422	278.1	292	305.9	755481.2	4.92	9.91	
106-3422	OZ®	198.1	134.71	1	53	59.1	62	64.9	5347.7	15.89	31.98	A2
		10648.5	3421.6	25.4	1371	288.7	302.8	316.8	730275	4.84	9.75	
111-3574	OZ®	206.3	140.71	0.875	60	55.5	58.2	61	6190	16.68	33.56	A2
		11093.3	3574	22.225	1524	270.7	284.2	297.7	845305.8	5.08	10.23	
113-3472	OZ®	209.7	136.71	1	56	60.1	63	65.8	5872.7	16.16	32.51	A2
		11276.3	3472.4	25.4	1422	293.6	307.5	321.4	801967.8	4.92	9.91	
118-3574	OZ®	220.1	140.71	0.938	60	58.8	61.5	64.3	6602.4	16.68	33.56	A2
		11832.3	3574	23.812	1524	286.9	300.4	313.9	901618.1	5.08	10.23	
126-3574	OZ®	233.7	140.71	1	60	62.1	64.8	67.6	7012.1	16.68	33.56	A2
		12566.5	3574	25.4	1524	303.1	316.6	330	957569.4	5.08	10.23	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Specifications

When using steel sheet pile, it is necessary to make allowances for deviations from theoretical exactness. The degree of precision obtainable in the production of sheet pile is limited by the basic character of the rolling processes and normal limitations of mill equipment. Care must be taken during installation to assure that each element is being set at the desired driving dimension.

- Dimensions typically shown are nominal.
- Actual thicknesses vary due to mill rolling practices; however, permitted variations for such dimensions are not addressed.
- Interlocks should be reasonably free-sliding when threaded.
- Terms, tolerance, dimensions, and delivery conditions are in accordance with EN 10248 and/or ASTM A6.
- Welding is in accordance with AWS D1.1.

	AMERICAN ASTM A 6		EUROPEAN EN 10248
Mass	5%	-2.5%	± 5%
Length	+ 5in.	-0 in.	± 200mm
Height			± 7mm
Thickness			± 0.5mm for ≤ 8.5mm ± 6% for > 8.5mm
Width Interlocked			± 3%
Straightness			0.2% of the length
Ends ou of Square			2% of the width

Available Steel Grades

AMERICAN			CANADIAN			EUROPEAN		
ASTM	YIELD STRENGTH		CSA G40.21	YIELD STRENGTH		EN 10248	YIELD STRENGTH	
	(ksi)	(MPa)		(ksi)	(MPa)		(ksi)	(MPa)
A 328	39	270	Grade 260 W	38	260	S 240 GP	35	240
A 572 Grade 42	42	290	Grade 300 W	44	300	S 270 GP	39	270
A 572 Grade 50	50	345	Grade 355 W	50	350	S 320 GP	46	320
A 572 Grade 55	55	380	Grade 400 W	58	400	S 355 GP	51	355
A 572 Grade 60	60	415				S 390 GP	57	390
A 572 Grade 65*	65	450				S 430 GP	62	430
A 588 Grade 50	50	345				S 450 GP*	65	450
API 5L x70	70	485						
ASTM A 690 MARINER®	50	345						

ENGINEERING DISCLAIMER

This publication contains information on the properties of hot-rolled sheet pile based on accepted engineering practices related to sheet pile products and projects. The use of the data contained herein must be supplemented with qualified professional judgment.

LEGAL DISCLAIMER

“The information, including technical and engineering data, figures, tables, designs, drawings, details, suggested procedures, and suggested specifications, presented in this publication are for general information only. While every effort has been made to ensure its accuracy, this information should not be used or relied upon for any specific application without independent competent professional examination and verification of its accuracy, suitability and applicability.

Anyone making use of the material does so at their own risk and assumes any and all liability resulting from such use. **SHEET PILE LLC DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES OF MERCHANTABILITY FITNESS FOR ANY GENERAL OR PARTICULAR PURPOSE OR FREEDOM FROM INFRINGEMENT OF ANY PATENT, TRADEMARK, OR COPYRIGHT IN REGARD TO INFORMATION OR PRODUCTS CONTAINED OR REFERRED TO HEREIN.** Nothing herein contained shall be construed as granting a license, express or implied, under any patents.

These brands and products are supplied exclusively by or through Sheet Pile LLC.



Toll free: 866.666.7453 | +1 512.243.1228 | info@sheet-pile.com | sheet-pile.com

© 2026 Sheet Pile LLC. All rights reserved.