


OZ HR[®]

sheet-pile.com/oz


PilePro[®] Sheet Pile Connectors

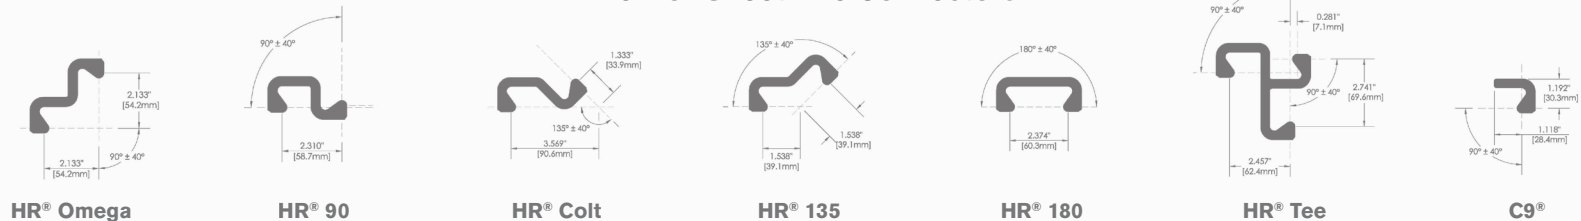

Sheet Pile LLC is the owner and assignee of US 7,390,145, related to these connectors.




Configuration A4

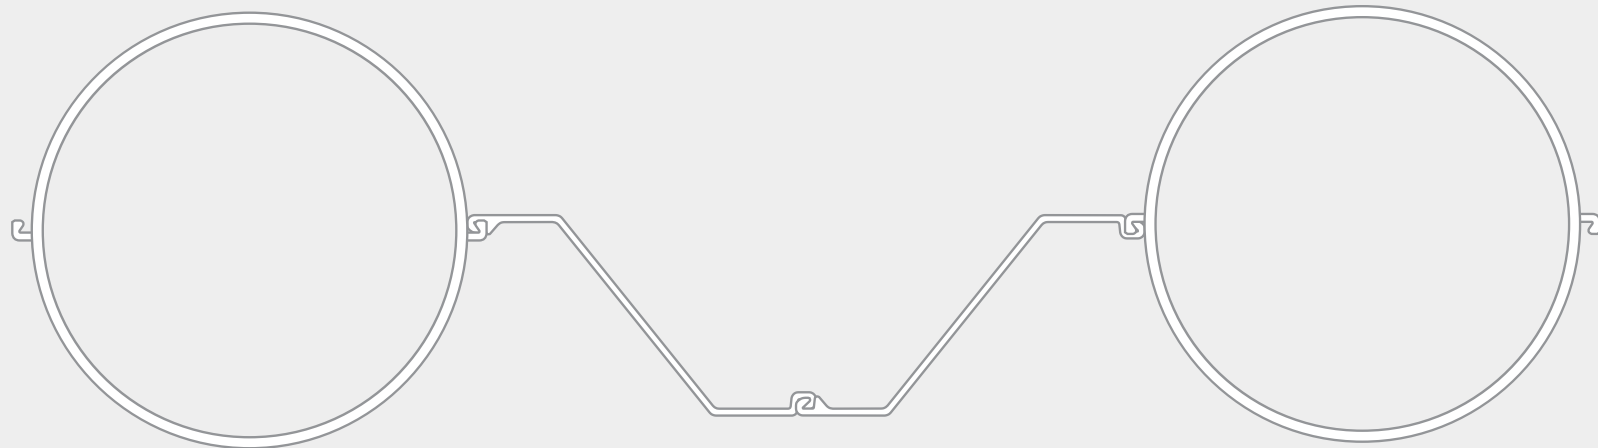

SECTION NAME:

78 - 2527



Section width in mm

Section modulus (elastic) in $\text{cm}^3/\text{m} \div 100$

These are examples from a large variety of possible OZ® solutions.

Please configure your own system on sheet-pile.com/oz

Sheet Pile LLC is the owner and assignee of numerous patents and trademarks related to the OZ® system, including, but not limited to, United States Patent Nos. 8,088,469, 8,323,765, and 7,935,406.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
27-2263	OZ®	50.4	89.09	0.375	31	26.4	29.6	32.7	806.8	10.29	21.3	A4
		2711.1	2262.8	9.525	812	129.1	144.3	159.6	110177.3	3.14	6.49	
28-2060	OZ®	51.5	81.09	0.562	24	31.1	34.6	38	618.1	9.24	19.21	A4
		2769.3	2059.6	14.288	609	152.1	168.8	185.6	84409.7	2.82	5.86	
28-2263	OZ®	52.3	89.09	0.394	31	27.3	30.4	33.5	836.9	10.29	21.3	A4
		2812.3	2262.8	10	812	133.2	148.5	163.7	114292.6	3.14	6.49	
28-2161	OZ®	52.4	85.09	0.472	28	29.4	32.7	35.9	733.7	9.77	20.26	A4
		2817.6	2161.2	12	711	143.6	159.6	175.5	100193.5	2.98	6.17	
29-2212	OZ®	53	87.09	0.438	30	28.6	31.8	35	795.2	10.03	20.78	A4
		2850.2	2212	11.112	762	139.8	155.4	171	108591.9	3.06	6.33	
29-2314	OZ®	53.7	91.09	0.375	34	26.9	30	33	913	10.55	21.83	A4
		2887.5	2313.6	9.525	863	131.4	146.3	161.2	124684.1	3.22	6.65	
29-2161	OZ®	54.6	85.09	0.5	28	30.5	33.8	37.1	763.8	9.77	20.26	A4
		2933.3	2161.2	12.7	711	149.1	165	181	104308.3	2.98	6.17	
30-2060	OZ®	55.1	81.09	0.625	24	33.4	36.8	40.3	661.2	9.24	19.21	A4
		2962.5	2059.6	15.875	609	163.1	179.8	196.6	90298.2	2.82	5.86	
30-2314	OZ®	55.8	91.09	0.394	34	27.8	30.8	33.9	948.5	10.55	21.83	A4
		2999.8	2313.6	10	863	135.7	150.6	165.5	129532.4	3.22	6.65	
30-2212	OZ®	56.1	87.09	0.472	30	30.1	33.3	36.5	841.7	10.03	20.78	A4
		3017	2212	12	762	147.1	162.7	178.3	114947.6	3.06	6.33	
30-2263	OZ®	56.7	89.09	0.438	31	29.3	32.4	35.5	907.1	10.29	21.3	A4
		3048	2262.8	11.112	812	142.8	158.1	173.3	123872.7	3.14	6.49	
31-2364	OZ®	57.2	93.09	0.375	36	27.4	30.4	33.3	1030	10.81	22.35	A4
		3076.5	2364.4	9.525	914	133.7	148.2	162.8	140659	3.3	6.81	
31-2212	OZ®	58.5	87.09	0.5	30	31.3	34.5	37.7	878.2	10.03	20.78	A4
		3147.7	2212	12.7	762	152.9	168.5	184	119928.2	3.06	6.33	
32-2060	OZ®	58.6	81.09	0.688	24	35.6	39.1	42.5	703.7	9.24	19.21	A4
		3152.6	2059.6	17.462	609	174	190.8	207.5	96090.6	2.82	5.86	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)				
32-2161	OZ [®]	59.4	85.09	0.562	28	33.1	36.3	39.6	831.5	9.77	20.26	A4
		3193.1	2161.2	14.288	711	161.5	177.4	193.4	113548.1	2.98	6.17	
32-2364	OZ [®]	59.5	93.09	0.394	36	28.3	31.3	34.3	1071.4	10.81	22.35	A4
		3200.2	2364.4	10	914	138.1	152.7	167.3	146312.5	3.3	6.81	
32-2263	OZ [®]	60.2	89.09	0.472	31	30.8	33.9	37.1	962.6	10.29	21.3	A4
		3234.7	2262.8	12	812	150.4	165.7	180.9	131457.6	3.14	6.49	
33-2314	OZ [®]	60.7	91.09	0.438	34	29.8	32.9	35.9	1031.2	10.55	21.83	A4
		3261.3	2313.6	11.112	863	145.7	160.6	175.5	140824.3	3.22	6.65	
33-2415	OZ [®]	60.9	95.09	0.375	38	27.8	30.7	33.7	1158	11.08	22.87	A4
		3276.7	2415.2	9.525	965	135.8	150.1	164.3	158132.3	3.38	6.97	
33-2060	OZ [®]	62.1	81.09	0.75	24	37.9	41.3	44.7	745.4	9.24	19.21	A4
		3339.5	2059.6	19.05	609	184.9	201.7	218.4	101787.8	2.82	5.86	
34-2263	OZ [®]	62.9	89.09	0.5	31	32	35.2	38.3	1006.2	10.29	21.3	A4
		3381	2262.8	12.7	812	156.5	171.7	186.9	137404.2	3.14	6.49	
34-2415	OZ [®]	63.5	95.09	0.394	38	28.7	31.7	34.6	1205.8	11.08	22.87	A4
		3412	2415.2	10	965	140.4	154.6	168.9	164663.9	3.38	6.97	
34-2212	OZ [®]	64	87.09	0.562	30	34	37.2	40.4	960.2	10.03	20.78	A4
		3441.5	2212	14.288	762	165.9	181.5	197.1	131119.4	3.06	6.33	
34-2161	OZ [®]	64.2	85.09	0.625	28	35.6	38.9	42.1	898.2	9.77	20.26	A4
		3449.4	2161.2	15.875	711	173.8	189.8	205.7	122659.7	2.98	6.17	
35-2314	OZ [®]	64.5	91.09	0.472	34	31.5	34.5	37.6	1096.7	10.55	21.83	A4
		3468.5	2313.6	12	863	153.6	168.5	183.5	149768.4	3.22	6.65	
35-2466	OZ [®]	64.9	97.09	0.375	40	28.2	31.1	34	1297.1	11.34	23.4	A4
		3486.8	2466	9.525	1016	137.8	151.8	165.8	177129.8	3.46	7.13	
35-2364	OZ [®]	64.9	93.09	0.438	36	30.4	33.4	36.4	1167.9	10.81	22.35	A4
		3488.3	2364.4	11.112	914	148.5	163	177.6	159483.7	3.3	6.81	
35-2060	OZ [®]	65.5	81.09	0.812	24	40.1	43.5	47	786.4	9.24	19.21	A4
		3523.3	2059.6	20.638	609	195.8	212.5	229.3	107390.9	2.82	5.86	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
36-2110	OZ®	67.4	83.09	0.75	26	39.3	42.6	46	876	9.51	19.73	A4
		3622.9	2110.4	19.05	660	191.8	208.1	224.5	119627.3	2.9	6.01	
36-2314	OZ®	67.5	91.09	0.5	34	32.8	35.8	38.9	1148.1	10.55	21.83	A4
		3630.9	2313.6	12.7	863	159.9	174.8	189.7	156783	3.22	6.65	
36-2466	OZ®	67.6	97.09	0.394	40	29.2	32.1	34.9	1351.9	11.34	23.4	A4
		3634.1	2466	10	1016	142.6	156.5	170.5	184614.4	3.46	7.13	
37-2161	OZ®	68.9	85.09	0.688	28	38.1	41.4	44.7	964	9.77	20.26	A4
		3702	2161.2	17.462	711	186.1	202.1	218	131644.5	2.98	6.17	
37-2060	OZ®	68.9	81.09	0.875	24	42.3	45.7	49.2	826.8	9.24	19.21	A4
		3704.1	2059.6	22.225	609	206.5	223.3	240	112900.7	2.82	5.86	
37-2517	OZ®	68.9	99.09	0.375	42	28.6	31.4	34.2	1447.6	11.6	23.92	A4
		3706	2516.8	9.525	1066	139.8	153.5	167.2	197676.9	3.54	7.29	
37-2263	OZ®	69	89.09	0.562	31	34.8	38	41.1	1104.1	10.29	21.3	A4
		3710	2262.8	14.288	812	170.1	185.3	200.5	150772.6	3.14	6.49	
37-2364	OZ®	69.1	93.09	0.472	36	32.1	35.1	38.1	1244.3	10.81	22.35	A4
		3716.5	2364.4	12	914	156.7	171.3	185.9	169920.1	3.3	6.81	
37-2415	OZ®	69.3	95.09	0.438	38	30.9	33.9	36.8	1317.3	11.08	22.87	A4
		3727.4	2415.2	11.112	965	151.1	165.4	179.6	179885	3.38	6.97	
37-2212	OZ®	69.4	87.09	0.625	30	36.6	39.8	43	1041.1	10.03	20.78	A4
		3731.4	2212	15.875	762	178.8	194.4	210	142166.5	3.06	6.33	
39-2517	OZ®	71.9	99.09	0.394	42	29.6	32.4	35.2	1509.9	11.6	23.92	A4
		3865.6	2516.8	10	1066	144.7	158.4	172.1	206189.7	3.54	7.29	
39-2060	OZ®	72.2	81.09	0.938	24	44.5	47.9	51.4	866.4	9.24	19.21	A4
		3881.8	2059.6	23.812	609	217.3	234	250.7	118318.2	2.82	5.86	
39-2364	OZ®	72.5	93.09	0.5	36	33.4	36.4	39.4	1304.3	10.81	22.35	A4
		3895.6	2364.4	12.7	914	163.2	177.8	192.4	178107.8	3.3	6.81	
39-2568	OZ®	73.2	101.09	0.375	43	29	31.8	34.5	1609.5	11.86	24.45	A4
		3933.3	2567.6	9.525	1117	141.7	155.1	168.5	219795.2	3.62	7.45	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
						60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	
40-2161	OZ®	73.5	85.09	0.75	28	40.6	43.9	47.2	1028.9	9.77	20.26	A4
		3951.2	2161.2	19.05	711	198.3	214.3	230.2	140503.5	2.98	6.17	
40-2415	OZ®	74	95.09	0.472	38	32.7	35.6	38.5	1405.6	11.08	22.87	A4
		3977.4	2415.2	12	965	159.6	173.9	188.2	191950.6	3.38	6.97	
40-2466	OZ®	74	97.09	0.438	40	31.5	34.3	37.2	1479.7	11.34	23.4	A4
		3977.6	2466	11.112	1016	153.6	167.6	181.6	202060.1	3.46	7.13	
40-2314	OZ®	74.3	91.09	0.562	34	35.7	38.7	41.8	1263.6	10.55	21.83	A4
		3996.3	2313.6	14.288	863	174.1	189	203.9	172561	3.22	6.65	
40-2212	OZ®	74.7	87.09	0.688	30	39.3	42.5	45.7	1120.9	10.03	20.78	A4
		4017.6	2212	17.462	762	191.7	207.3	222.9	153070.2	3.06	6.33	
40-2263	OZ®	75.1	89.09	0.625	31	37.6	40.7	43.8	1200.8	10.29	21.3	A4
		4034.9	2262.8	15.875	812	183.6	198.8	214.1	163980.1	3.14	6.49	
41-2060	OZ®	75.5	81.09	1	24	46.7	50.1	53.5	905.4	9.24	19.21	A4
		4056.6	2059.6	25.4	609	227.9	244.6	261.4	123645	2.82	5.86	
41-2568	OZ®	76.4	101.09	0.394	43	30	32.8	35.5	1680	11.86	24.45	A4
		4105.5	2567.6	10	1117	146.7	160.1	173.5	229414.3	3.62	7.45	
42-2415	OZ®	77.6	95.09	0.5	38	34.1	37	39.9	1475	11.08	22.87	A4
		4173.6	2415.2	12.7	965	166.4	180.6	194.9	201419	3.38	6.97	
42-2161	OZ®	78.1	85.09	0.812	28	43.1	46.4	49.6	1092.8	9.77	20.26	A4
		4196.8	2161.2	20.638	711	210.5	226.4	242.4	149238	2.98	6.17	
42-2517	OZ®	78.8	99.09	0.438	42	32	34.8	37.6	1655.2	11.6	23.92	A4
		4237.7	2516.8	11.112	1066	156.1	169.8	183.5	226037.9	3.54	7.29	
42-2466	OZ®	79	97.09	0.472	40	33.3	36.1	39	1581	11.34	23.4	A4
		4249.9	2466	12	1016	162.4	176.4	190.4	215893.8	3.46	7.13	
43-2364	OZ®	80	93.09	0.562	36	36.4	39.4	42.4	1439.2	10.81	22.35	A4
		4298.6	2364.4	14.288	914	177.9	192.5	207.1	196534.1	3.3	6.81	
43-2212	OZ®	80	87.09	0.75	30	41.9	45.1	48.3	1199.7	10.03	20.78	A4
		4300	2212	19.05	762	204.6	220.2	235.7	163831.5	3.06	6.33	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)				
44-2263	OZ [®]	81	89.09	0.688	31	40.4	43.5	46.6	1296.3	10.29	21.3	A4
		4356	2262.8	17.462	812	197.1	212.3	227.6	177027.2	3.14	6.49	
44-2314	OZ [®]	81.1	91.09	0.625	34	38.5	41.6	44.6	1377.9	10.55	21.83	A4
		4357.6	2313.6	15.875	863	188.2	203.1	218	188160.5	3.22	6.65	
44-2669	OZ [®]	82	105.09	0.375	48	29.7	32.4	35	1968.6	12.39	25.49	A4
		4409.9	2669.2	9.525	1219	145.2	158.1	171.1	268830.1	3.78	7.77	
44-2161	OZ [®]	82.6	85.09	0.875	28	45.6	48.9	52.1	1155.9	9.77	20.26	A4
		4439	2161.2	22.225	711	222.6	238.6	254.5	157849.4	2.98	6.17	
45-2466	OZ [®]	83	97.09	0.5	40	34.7	37.6	40.4	1660.5	11.34	23.4	A4
		4463.6	2466	12.7	1016	169.4	183.4	197.3	226752.3	3.46	7.13	
45-2568	OZ [®]	83.8	101.09	0.438	43	32.4	35.2	37.9	1844.2	11.86	24.45	A4
		4506.9	2567.6	11.112	1117	158.4	171.8	185.3	251845	3.62	7.45	
45-2517	OZ [®]	84.3	99.09	0.472	42	33.8	36.6	39.4	1770.5	11.6	23.92	A4
		4532.8	2516.8	12	1066	165.1	178.8	192.5	241780.9	3.54	7.29	
46-2212	OZ [®]	85.2	87.09	0.812	30	44.5	47.7	50.9	1277.5	10.03	20.78	A4
		4578.8	2212	20.638	762	217.3	232.9	248.5	174452.6	3.06	6.33	
46-2669	OZ [®]	85.7	105.09	0.394	48	30.8	33.5	36.1	2057	12.39	25.49	A4
		4607.9	2669.2	10	1219	150.5	163.4	176.3	280896.2	3.78	7.77	
46-2415	OZ [®]	85.8	95.09	0.562	38	37.2	40.1	43	1631.1	11.08	22.87	A4
		4615.3	2415.2	14.288	965	181.6	195.8	210.1	222736.1	3.38	6.97	
47-2720	OZ [®]	86.6	107.09	0.375	50	30.1	32.7	35.3	2166	12.65	26.02	A4
		4658	2720	9.525	1270	146.9	159.6	172.2	295783.5	3.85	7.93	
47-2263	OZ [®]	86.9	89.09	0.75	31	43.1	46.2	49.4	1390.7	10.29	21.3	A4
		4673.1	2262.8	19.05	812	210.5	225.8	241	189915.2	3.14	6.49	
47-2161	OZ [®]	87	85.09	0.938	28	48.1	51.3	54.6	1218.1	9.77	20.26	A4
		4677.7	2161.2	23.812	711	234.6	250.6	266.6	166338.7	2.98	6.17	
47-2364	OZ [®]	87.4	93.09	0.625	36	39.4	42.4	45.4	1572.7	10.81	22.35	A4
		4697.3	2364.4	15.875	914	192.5	207.1	221.7	214762.8	3.3	6.81	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
47-2314	OZ®	87.7	91.09	0.688	34	41.4	44.5	47.5	1490.8	10.55	21.83	A4
		4714.7	2313.6	17.462	863	202.2	217.1	232	203582.4	3.22	6.65	
48-2517	OZ®	88.6	99.09	0.5	42	35.3	38.1	40.9	1861	11.6	23.92	A4
		4764.6	2516.8	12.7	1066	172.3	186	199.7	254141.4	3.54	7.29	
48-2568	OZ®	89.8	101.09	0.472	43	34.4	37.1	39.9	1974.5	11.86	24.45	A4
		4825.4	2567.6	12	1117	167.7	181.2	194.6	269641.4	3.62	7.45	
49-2212	OZ®	90.3	87.09	0.875	30	47.1	50.3	53.5	1354.2	10.03	20.78	A4
		4853.9	2212	22.225	762	230.1	245.7	261.3	184934.1	3.06	6.33	
49-2720	OZ®	90.6	107.09	0.394	50	31.2	33.8	36.4	2264.2	12.65	26.02	A4
		4869.2	2720	10	1270	152.3	165	177.6	309192.7	3.85	7.93	
49-2771	OZ®	91.4	109.09	0.375	52	30.4	33	35.5	2375.4	12.91	26.54	A4
		4911.9	2770.8	9.525	1320	148.5	160.9	173.4	324382.9	3.93	8.09	
49-2161	OZ®	91.4	85.09	1	28	50.5	53.8	57.1	1279.4	9.77	20.26	A4
		4913	2161.2	25.4	711	246.6	262.6	278.6	174706.7	2.98	6.17	
49-2466	OZ®	92	97.09	0.562	40	37.9	40.8	43.6	1839.6	11.34	23.4	A4
		4945	2466	14.288	1016	185.1	199.1	213	251208.5	3.46	7.13	
50-2263	OZ®	92.7	89.09	0.812	31	45.9	49	52.1	1483.9	10.29	21.3	A4
		4986.4	2262.8	20.638	812	223.9	239.1	254.4	202646.4	3.14	6.49	
51-2415	OZ®	94	95.09	0.625	38	40.3	43.2	46.1	1785.6	11.08	22.87	A4
		5052.6	2415.2	15.875	965	196.7	211	225.3	243837.4	3.38	6.97	
51-2314	OZ®	94.3	91.09	0.75	34	44.3	47.3	50.4	1602.4	10.55	21.83	A4
		5067.8	2313.6	19.05	863	216.2	231.1	246	218827.9	3.22	6.65	
51-2669	OZ®	94.3	105.09	0.438	48	33.3	36	38.6	2263.1	12.39	25.49	A4
		5069.6	2669.2	11.112	1219	162.8	175.7	188.6	309044	3.78	7.77	
51-2568	OZ®	94.4	101.09	0.5	43	35.9	38.6	41.4	2076.9	11.86	24.45	A4
		5075.5	2567.6	12.7	1117	175.1	188.5	201.9	283617.1	3.62	7.45	
51-2364	OZ®	94.7	93.09	0.688	36	42.4	45.4	48.4	1704.7	10.81	22.35	A4
		5091.8	2364.4	17.462	914	207.1	221.7	236.3	232796.1	3.3	6.81	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
51-2212	OZ®	95.3	87.09	0.938	30	49.7	52.9	56.1	1430	10.03	20.78	A4
		5125.4	2212	23.812	762	242.7	258.3	273.9	195277.7	3.06	6.33	
51-2771	OZ®	95.5	109.09	0.394	52	31.5	34.1	36.6	2484	12.91	26.54	A4
		5136.5	2770.8	10	1320	154	166.4	178.9	339216.9	3.93	8.09	
52-2822	OZ®	96.2	111.09	0.375	53	30.7	33.2	35.7	2597	13.17	27.06	A4
		5171.2	2821.6	9.525	1371	150.1	162.3	174.5	354644.2	4.01	8.25	
53-2517	OZ®	98.3	99.09	0.562	42	38.6	41.4	44.2	2065	11.6	23.92	A4
		5286.6	2516.8	14.288	1066	188.5	202.2	215.9	281989.5	3.54	7.29	
53-2263	OZ®	98.5	89.09	0.875	31	48.6	51.7	54.8	1576	10.29	21.3	A4
		5295.8	2262.8	22.225	812	237.2	252.5	267.7	215221.1	3.14	6.49	
54-2720	OZ®	99.7	107.09	0.438	50	33.8	36.4	39	2493.3	12.65	26.02	A4
		5361.9	2720	11.112	1270	164.9	177.5	190.2	340479.5	3.85	7.93	
54-2212	OZ®	100.3	87.09	1	30	52.3	55.5	58.7	1504.7	10.03	20.78	A4
		5393.3	2212	25.4	762	255.4	271	286.5	205483.8	3.06	6.33	
54-2822	OZ®	100.6	111.09	0.394	53	31.9	34.4	36.9	2716.7	13.17	27.06	A4
		5409.5	2821.6	10	1371	155.7	167.9	180.1	370984.6	4.01	8.25	
54-2314	OZ®	100.8	91.09	0.812	34	47.1	50.2	53.2	1712.8	10.55	21.83	A4
		5416.8	2313.6	20.638	863	230.2	245.1	260	233898.3	3.22	6.65	
54-2466	OZ®	100.8	97.09	0.625	40	41.1	44	46.8	2016.9	11.34	23.4	A4
		5421.8	2466	15.875	1016	200.7	214.7	228.7	275429.9	3.46	7.13	
54-2872	OZ®	101.1	113.09	0.375	56	31	33.5	36	2830.9	13.43	27.59	A4
		5435.6	2872.4	9.525	1422	151.6	163.6	175.6	386582.4	4.09	8.41	
54-2669	OZ®	101.1	105.09	0.472	48	35.4	38	40.6	2426.7	12.39	25.49	A4
		5436.1	2669.2	12	1219	172.6	185.5	198.4	331386.6	3.78	7.77	
55-2364	OZ®	102	93.09	0.75	36	45.4	48.4	51.4	1835.4	10.81	22.35	A4
		5482	2364.4	19.05	914	221.7	236.2	250.8	250634.9	3.3	6.81	
55-2415	OZ®	102	95.09	0.688	38	43.4	46.3	49.2	1938.5	11.08	22.87	A4
		5485.4	2415.2	17.462	965	211.8	226.1	240.4	264724.3	3.38	6.97	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
56-2263	OZ®	104.2	89.09	0.938	31	51.3	54.4	57.5	1667	10.29	21.3	A4
		5601.4	2262.8	23.812	812	250.5	265.7	281	227640.6	3.14	6.49	
56-2568	OZ®	104.9	101.09	0.562	43	39.3	42	44.8	2307.5	11.86	24.45	A4
		5639.1	2567.6	14.288	1117	191.7	205.1	218.6	315113.4	3.62	7.45	
57-2771	OZ®	105.3	109.09	0.438	52	34.2	36.7	39.3	2737.5	12.91	26.54	A4
		5660.7	2770.8	11.112	1320	166.9	179.3	191.8	373832.5	3.93	8.09	
57-2872	OZ®	105.8	113.09	0.394	56	32.2	34.7	37.1	2962.2	13.43	27.59	A4
		5687.7	2872.4	10	1422	157.3	169.3	181.3	404511.6	4.09	8.41	
57-2669	OZ®	106.5	105.09	0.5	48	36.9	39.6	42.2	2555.2	12.39	25.49	A4
		5724.1	2669.2	12.7	1219	180.3	193.2	206.2	348939.1	3.78	7.77	
58-2720	OZ®	107	107.09	0.472	50	35.8	38.4	41	2675.2	12.65	26.02	A4
		5753.1	2720	12	1270	174.9	187.6	200.3	365319.2	3.85	7.93	
58-2314	OZ®	107.2	91.09	0.875	34	50	53	56.1	1821.9	10.55	21.83	A4
		5761.8	2313.6	22.225	863	244	258.9	273.8	248795.5	3.22	6.65	
58-2517	OZ®	108	99.09	0.625	42	41.9	44.7	47.5	2267	11.6	23.92	A4
		5804	2516.8	15.875	1066	204.6	218.3	232	309582.9	3.54	7.29	
59-2364	OZ®	109.1	93.09	0.812	36	48.4	51.4	54.3	1964.6	10.81	22.35	A4
		5867.9	2364.4	20.638	914	236.1	250.7	265.3	268281.3	3.3	6.81	
59-2466	OZ®	109.6	97.09	0.688	40	44.3	47.2	50	2192.6	11.34	23.4	A4
		5894.1	2466	17.462	1016	216.3	230.3	244.3	299417.8	3.46	7.13	
59-2263	OZ®	109.8	89.09	1	31	54	57.1	60.3	1756.8	10.29	21.3	A4
		5903.2	2262.8	25.4	812	263.7	278.9	294.2	239906.8	3.14	6.49	
59-2415	OZ®	110	95.09	0.75	38	46.5	49.4	52.3	2089.9	11.08	22.87	A4
		5913.8	2415.2	19.05	965	226.9	241.2	255.4	285398.8	3.38	6.97	
60-2822	OZ®	111	111.09	0.438	53	34.6	37.1	39.6	2995.9	13.17	27.06	A4
		5965.6	2821.6	11.112	1371	168.8	181	193.2	409122.2	4.01	8.25	
61-2720	OZ®	112.7	107.09	0.5	50	37.4	40	42.6	2818.1	12.65	26.02	A4
		6060.4	2720	12.7	1270	182.8	195.5	208.2	384836.1	3.85	7.93	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
61-2771	OZ®	113	109.09	0.472	52	36.3	38.8	41.4	2938.8	12.91	26.54	A4
		6076.9	2770.8	12	1320	177.1	189.6	202	401320.6	3.93	8.09	
61-2314	OZ®	113.5	91.09	0.938	34	52.8	55.9	58.9	1929.7	10.55	21.83	A4
		6102.8	2313.6	23.812	863	257.9	272.8	287.7	263520.1	3.22	6.65	
62-2568	OZ®	115.3	101.09	0.625	43	42.7	45.4	48.2	2536.2	11.86	24.45	A4
		6197.8	2567.6	15.875	1117	208.3	221.7	235.1	346335.2	3.62	7.45	
62-2364	OZ®	116.2	93.09	0.875	36	51.3	54.3	57.3	2092.4	10.81	22.35	A4
		6249.7	2364.4	22.225	914	250.6	265.2	279.7	285736	3.3	6.81	
63-2872	OZ®	116.7	113.09	0.438	56	35	37.4	39.9	3268.6	13.43	27.59	A4
		6276.2	2872.4	11.112	1422	170.7	182.7	194.7	446361.6	4.09	8.41	
63-2517	OZ®	117.5	99.09	0.688	42	45.2	48	50.8	2467.2	11.6	23.92	A4
		6316.5	2516.8	17.462	1066	220.7	234.4	248.1	336923.6	3.54	7.29	
63-2415	OZ®	117.9	95.09	0.812	38	49.5	52.5	55.4	2239.8	11.08	22.87	A4
		6337.8	2415.2	20.638	965	241.9	256.2	270.4	305861.7	3.38	6.97	
64-2466	OZ®	118.3	97.09	0.75	40	47.5	50.4	53.2	2366.6	11.34	23.4	A4
		6361.7	2466	19.05	1016	231.9	245.9	259.8	323174	3.46	7.13	
64-2669	OZ®	118.5	105.09	0.562	48	40.5	43.2	45.8	2845.1	12.39	25.49	A4
		6373.3	2669.2	14.288	1219	197.8	210.7	223.7	388517.2	3.78	7.77	
64-2771	OZ®	119.1	109.09	0.5	52	37.9	40.5	43	3097	12.91	26.54	A4
		6404	2770.8	12.7	1320	185.2	197.6	210.1	422920.9	3.93	8.09	
64-2822	OZ®	119.2	111.09	0.472	53	36.7	39.2	41.7	3217.7	13.17	27.06	A4
		6407.3	2821.6	12	1371	179.3	191.5	203.7	439410	4.01	8.25	
64-2314	OZ®	119.8	91.09	1	34	55.6	58.7	61.7	2036.3	10.55	21.83	A4
		6439.9	2313.6	25.4	863	271.7	286.6	301.5	278074.1	3.22	6.65	
66-2364	OZ®	123.3	93.09	0.938	36	54.3	57.3	60.2	2218.8	10.81	22.35	A4
		6627.3	2364.4	23.812	914	265	279.5	294.1	303000.4	3.3	6.81	
67-2872	OZ®	125.4	113.09	0.472	56	37.1	39.6	42.1	3512.1	13.43	27.59	A4
		6743.6	2872.4	12	1422	181.3	193.3	205.3	479605.6	4.09	8.41	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)				
68-2568	OZ [®]	125.6	101.09	0.688	43	46	48.8	51.5	2762.8	11.86	24.45	A4
		6751.7	2567.6	17.462	1117	224.8	238.2	251.7	377284.7	3.62	7.45	
68-2720	OZ [®]	125.6	107.09	0.562	50	41.1	43.7	46.3	3140.4	12.65	26.02	A4
		6753.6	2720	14.288	1270	200.7	213.4	226.1	428852.6	3.85	7.93	
68-2822	OZ [®]	125.6	111.09	0.5	53	38.4	40.9	43.4	3392.1	13.17	27.06	A4
		6754.4	2821.6	12.7	1371	187.5	199.7	211.9	463215.6	4.01	8.25	
68-2415	OZ [®]	125.7	95.09	0.875	38	52.6	55.5	58.5	2388.1	11.08	22.87	A4
		6757.5	2415.2	22.225	965	256.8	271.1	285.4	326114.7	3.38	6.97	
68-2517	OZ [®]	126.9	99.09	0.75	42	48.5	51.3	54.1	2665.6	11.6	23.92	A4
		6824.4	2516.8	19.05	1066	236.7	250.4	264.1	364013.1	3.54	7.29	
68-2466	OZ [®]	126.9	97.09	0.812	40	50.7	53.5	56.4	2538.8	11.34	23.4	A4
		6824.8	2466	20.638	1016	247.4	261.4	275.3	346700	3.46	7.13	
70-2364	OZ [®]	130.2	93.09	1	36	57.2	60.2	63.2	2343.9	10.81	22.35	A4
		7000.8	2364.4	25.4	914	279.3	293.9	308.4	320076.6	3.3	6.81	
70-2669	OZ [®]	130.5	105.09	0.625	48	44.1	46.7	49.4	3132.6	12.39	25.49	A4
		7017.4	2669.2	15.875	1219	215.3	228.2	241.1	427779.6	3.78	7.77	
71-2872	OZ [®]	132.3	113.09	0.5	56	38.9	41.3	43.8	3703.4	13.43	27.59	A4
		7111	2872.4	12.7	1422	189.7	201.7	213.7	505737.1	4.09	8.41	
71-2771	OZ [®]	132.8	109.09	0.562	52	41.7	44.2	46.8	3453.8	12.91	26.54	A4
		7141.9	2770.8	14.288	1320	203.5	215.9	228.4	471650.5	3.93	8.09	
72-2415	OZ [®]	133.4	95.09	0.938	38	55.7	58.6	61.5	2534.9	11.08	22.87	A4
		7172.8	2415.2	23.812	965	271.7	286	300.3	346159.4	3.38	6.97	
73-2466	OZ [®]	135.5	97.09	0.875	40	53.8	56.7	59.6	2709.4	11.34	23.4	A4
		7283.4	2466	22.225	1016	262.8	276.8	290.8	369997.2	3.46	7.13	
73-2568	OZ [®]	135.8	101.09	0.75	43	49.4	52.2	54.9	2987.4	11.86	24.45	A4
		7300.7	2567.6	19.05	1117	241.3	254.7	268.2	407962.8	3.62	7.45	
73-2517	OZ [®]	136.3	99.09	0.812	42	51.7	54.6	57.4	2862.2	11.6	23.92	A4
		7327.6	2516.8	20.638	1066	252.7	266.4	280.1	390852.7	3.54	7.29	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
74-2720	OZ®	138.4	107.09	0.625	50	44.8	47.4	50	3460.3	12.65	26.02	A4
		7441.5	2720	15.875	1270	218.5	231.2	243.9	472536.5	3.85	7.93	
75-2822	OZ®	140.2	111.09	0.562	53	42.2	44.7	47.2	3785.4	13.17	27.06	A4
		7537.6	2821.6	14.288	1371	206.2	218.4	230.6	516926.3	4.01	8.25	
76-2415	OZ®	141.1	95.09	1	38	58.7	61.6	64.5	2680.1	11.08	22.87	A4
		7583.9	2415.2	25.4	965	286.6	300.9	315.1	365997.1	3.38	6.97	
77-2669	OZ®	142.4	105.09	0.688	48	47.6	50.3	52.9	3417.8	12.39	25.49	A4
		7656.3	2669.2	17.462	1219	232.6	245.6	258.5	466727.6	3.78	7.77	
77-2466	OZ®	143.9	97.09	0.938	40	57	59.9	62.7	2878.4	11.34	23.4	A4
		7737.5	2466	23.812	1016	278.2	292.2	306.2	393067.4	3.46	7.13	
78-2517	OZ®	145.6	99.09	0.875	42	55	57.8	60.6	3056.9	11.6	23.92	A4
		7826.1	2516.8	22.225	1066	268.6	282.3	296	417444.5	3.54	7.29	
78-2974	OZ®	145.9	117.09	0.5	60	39.7	42.1	44.5	4375.7	13.96	28.63	A4
		7841.7	2974	12.7	1524	193.9	205.5	217.1	597535	4.25	8.73	
78-2568	OZ®	145.9	101.09	0.812	43	52.8	55.5	58.3	3210.1	11.86	24.45	A4
		7844.8	2567.6	20.638	1117	257.7	271.2	284.6	438370.2	3.62	7.45	
79-2771	OZ®	146.5	109.09	0.625	52	45.4	48	50.5	3808	12.91	26.54	A4
		7874.3	2770.8	15.875	1320	221.7	234.2	246.6	520019.2	3.93	8.09	
79-2872	OZ®	147.7	113.09	0.562	56	42.8	45.2	47.7	4135.3	13.43	27.59	A4
		7940.2	2872.4	14.288	1422	208.7	220.8	232.8	564705.2	4.09	8.41	
81-2720	OZ®	151.1	107.09	0.688	50	48.4	51	53.6	3777.7	12.65	26.02	A4
		8124.1	2720	17.462	1270	236.3	249	261.7	515882.1	3.85	7.93	
82-2466	OZ®	152.3	97.09	1	40	60.1	63	65.9	3045.7	11.34	23.4	A4
		8187.2	2466	25.4	1016	293.6	307.6	321.5	415911.5	3.46	7.13	
83-2669	OZ®	154.2	105.09	0.75	48	51.2	53.8	56.5	3700.7	12.39	25.49	A4
		8290.1	2669.2	19.05	1219	250	262.9	275.8	505364.6	3.78	7.77	
83-2822	OZ®	154.7	111.09	0.625	53	46	48.5	51	4175.9	13.17	27.06	A4
		8315.2	2821.6	15.875	1371	224.8	237	249.2	570257.7	4.01	8.25	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
83-2517	OZ®	154.8	99.09	0.938	42	58.3	61.1	63.9	3249.8	11.6	23.92	A4
		8320	2516.8	23.812	1066	284.5	298.2	311.9	443789.4	3.54	7.29	
84-2568	OZ®	155.9	101.09	0.875	43	56.1	58.9	61.6	3430.8	11.86	24.45	A4
		8384.2	2567.6	22.225	1117	274.1	287.5	301	468511.1	3.62	7.45	
86-2771	OZ®	160	109.09	0.688	52	49.1	51.7	54.2	4159.6	12.91	26.54	A4
		8601.4	2770.8	17.462	1320	239.9	252.4	264.8	568034.2	3.93	8.09	
88-2872	OZ®	163	113.09	0.625	56	46.6	49.1	51.6	4564.2	13.43	27.59	A4
		8763.7	2872.4	15.875	1422	227.7	239.7	251.7	623276.4	4.09	8.41	
88-2974	OZ®	163	117.09	0.562	60	43.8	46.1	48.5	4890.6	13.96	28.63	A4
		8764.5	2974	14.288	1524	213.7	225.2	236.8	667857.8	4.25	8.73	
88-2720	OZ®	163.7	107.09	0.75	50	52	54.6	57.2	4092.7	12.65	26.02	A4
		8801.5	2720	19.05	1270	254.1	266.8	279.5	558896.8	3.85	7.93	
88-2517	OZ®	163.9	99.09	1	42	61.5	64.3	67.1	3440.9	11.6	23.92	A4
		8809.3	2516.8	25.4	1066	300.3	314	327.7	469889.8	3.54	7.29	
89-2669	OZ®	165.9	105.09	0.812	48	54.7	57.4	60	3981.4	12.39	25.49	A4
		8918.8	2669.2	20.638	1219	267.3	280.2	293.1	543690.7	3.78	7.77	
89-2568	OZ®	165.9	101.09	0.938	43	59.5	62.2	65	3649.6	11.86	24.45	A4
		8918.9	2567.6	23.812	1117	290.5	303.9	317.3	498387.3	3.62	7.45	
91-2822	OZ®	169	111.09	0.688	53	49.8	52.3	54.8	4563.7	13.17	27.06	A4
		9087.4	2821.6	17.462	1371	243.3	255.6	267.8	623213.5	4.01	8.25	
93-2771	OZ®	173.4	109.09	0.75	52	52.9	55.4	58	4508.6	12.91	26.54	A4
		9323.1	2770.8	19.05	1320	258.1	270.5	282.9	615695.5	3.93	8.09	
94-2568	OZ®	175.7	101.09	1	43	62.8	65.6	68.3	3866.4	11.86	24.45	A4
		9448.7	2567.6	25.4	1117	306.7	320.2	333.6	527994.7	3.62	7.45	
95-2720	OZ®	176.2	107.09	0.812	50	55.7	58.3	60.9	4405.3	12.65	26.02	A4
		9473.7	2720	20.638	1270	271.8	284.5	297.2	601580.6	3.85	7.93	
95-2669	OZ®	177.5	105.09	0.875	48	58.3	60.9	63.6	4259.8	12.39	25.49	A4
		9542.5	2669.2	22.225	1219	284.5	297.5	310.4	581709.6	3.78	7.77	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
96-2872	OZ®	178.2	113.09	0.688	56	50.5	53	55.4	4990.1	13.43	27.59	A4
		9581.6	2872.4	17.462	1422	246.7	258.7	270.7	681443.8	4.09	8.41	
97-2974	OZ®	180.1	117.09	0.625	60	47.8	50.2	52.5	5402.3	13.96	28.63	A4
		9681.6	2974	15.875	1524	233.3	244.9	256.5	737736.8	4.25	8.73	
99-2822	OZ®	183.3	111.09	0.75	53	53.6	56.1	58.6	4948.7	13.17	27.06	A4
		9854	2821.6	19.05	1371	261.9	274.1	286.3	675790	4.01	8.25	
100-2771	OZ®	186.7	109.09	0.812	52	56.6	59.1	61.7	4855.1	12.91	26.54	A4
		10039.4	2770.8	20.638	1320	276.2	288.6	301	663003.2	3.93	8.09	
101-2720	OZ®	188.6	107.09	0.875	50	59.3	61.9	64.5	4715.4	12.65	26.02	A4
		10140.7	2720	22.225	1270	289.5	302.1	314.8	643933.5	3.85	7.93	
102-2669	OZ®	189	105.09	0.938	48	61.8	64.5	67.1	4535.9	12.39	25.49	A4
		10161.1	2669.2	23.812	1219	301.8	314.7	327.6	619421.2	3.78	7.77	
104-2872	OZ®	193.3	113.09	0.75	56	54.4	56.8	59.3	5413.2	13.43	27.59	A4
		10394	2872.4	19.05	1422	265.5	277.5	289.6	739217.8	4.09	8.41	
106-2974	OZ®	197	117.09	0.688	60	51.8	54.2	56.6	5910.8	13.96	28.63	A4
		10592.8	2974	17.462	1524	252.9	264.5	276.1	807171.9	4.25	8.73	
106-2822	OZ®	197.4	111.09	0.812	53	57.4	59.9	62.4	5331	13.17	27.06	A4
		10615.3	2821.6	20.638	1371	280.3	292.6	304.8	727994.5	4.01	8.25	
108-2771	OZ®	200	109.09	0.875	52	60.3	62.8	65.4	5198.9	12.91	26.54	A4
		10750.4	2770.8	22.225	1320	294.2	306.7	319.1	709957.1	3.93	8.09	
108-2669	OZ®	200.4	105.09	1	48	65.3	68	70.6	4809.8	12.39	25.49	A4
		10774.7	2669.2	25.4	1219	318.9	331.8	344.8	656827.1	3.78	7.77	
108-2720	OZ®	200.9	107.09	0.938	50	62.9	65.5	68.1	5023.2	12.65	26.02	A4
		10802.5	2720	23.812	1270	307.1	319.8	332.4	685959.3	3.85	7.93	
112-2872	OZ®	208.3	113.09	0.812	56	58.2	60.7	63.2	5833.3	13.43	27.59	A4
		11200.7	2872.4	20.638	1422	284.4	296.4	308.4	796591.4	4.09	8.41	
114-2822	OZ®	211.5	111.09	0.875	53	61.2	63.7	66.2	5710.6	13.17	27.06	A4
		11371.1	2821.6	22.225	1371	298.8	311	323.2	779826.8	4.01	8.25	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
						60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	
115-2771	OZ®	213.1	109.09	0.938	52	63.9	66.5	69	5540.2	12.91	26.54	A4
		11456.2	2770.8	23.812	1320	312.2	324.7	337.1	756568.2	3.93	8.09	
115-2771	OZ®	213.1	107.09	1	50	66.5	69.1	71.7	5328.5	12.65	26.02	A4
		11459.2	2720	25.4	1270	324.7	337.3	350	727656.8	3.85	7.93	
115-2771	OZ®	213.9	117.09	0.75	60	55.8	58.2	60.6	6416	13.96	28.63	A4
		11498.2	2974	19.05	1524	272.5	284.1	295.7	876163.1	4.25	8.73	
115-2771	OZ®	223.2	113.09	0.875	56	62.1	64.6	67	6250.6	13.43	27.59	A4
		12001.9	2872.4	22.225	1422	303.2	315.2	327.2	853571.6	4.09	8.41	
115-2771	OZ®	225.5	111.09	0.938	53	65	67.5	70	6087.4	13.17	27.06	A4
		12121.4	2821.6	23.812	1371	317.2	329.4	341.6	831286.9	4.01	8.25	
115-2771	OZ®	226.1	109.09	1	52	67.6	70.2	72.7	5879	12.91	26.54	A4
		12156.7	2770.8	25.4	1320	330.2	342.6	355.1	802826.8	3.93	8.09	
115-2771	OZ®	230.6	117.09	0.812	60	59.8	62.2	64.6	6918	13.96	28.63	A4
		12397.8	2974	20.638	1524	292.1	303.7	315.3	944710.6	4.25	8.73	
115-2771	OZ®	238	113.09	0.938	56	65.9	68.4	70.9	6665	13.43	27.59	A4
		12797.6	2872.4	23.812	1422	322	334	346	910162	4.09	8.41	
115-2771	OZ®	239.3	111.09	1	53	68.7	71.2	73.7	6461.5	13.17	27.06	A4
		12866.4	2821.6	25.4	1371	335.5	347.7	360	882380.6	4.01	8.25	
115-2771	OZ®	247.2	117.09	0.875	60	63.8	66.2	68.6	7416.8	13.96	28.63	A4
		13291.7	2974	22.225	1524	311.6	323.2	334.7	1012824.2	4.25	8.73	
115-2771	OZ®	252.7	113.09	1	56	69.8	72.2	74.7	7076.5	13.43	27.59	A4
		13587.7	2872.4	25.4	1422	340.7	352.7	364.7	966358.9	4.09	8.41	
115-2771	OZ®	263.7	117.09	0.938	60	67.8	70.2	72.5	7912.3	13.96	28.63	A4
		14179.8	2974	23.812	1524	331	342.6	354.2	1080497.4	4.25	8.73	
115-2771	OZ®	280.2	117.09	1	60	71.8	74.1	76.5	8404.7	13.96	28.63	A4
		15062.2	2974	25.4	1524	350.4	362	373.6	1147736.8	4.25	8.73	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Specifications

When using steel sheet pile, it is necessary to make allowances for deviations from theoretical exactness. The degree of precision obtainable in the production of sheet pile is limited by the basic character of the rolling processes and normal limitations of mill equipment. Care must be taken during installation to assure that each element is being set at the desired driving dimension.

- Dimensions typically shown are nominal.
- Actual thicknesses vary due to mill rolling practices; however, permitted variations for such dimensions are not addressed.
- Interlocks should be reasonably free-sliding when threaded.
- Terms, tolerance, dimensions, and delivery conditions are in accordance with EN 10248 and/or ASTM A6.
- Welding is in accordance with AWS D1.1.

	AMERICAN ASTM A 6		EUROPEAN EN 10248
Mass	5%	-2.5%	± 5%
Length	+ 5in.	-0 in.	± 200mm
Height			± 7mm
Thickness			± 0.5mm for ≤ 8.5mm ± 6% for > 8.5mm
Width Interlocked			± 3%
Straightness			0.2% of the length
Ends ou of Square			2% of the width

Available Steel Grades

AMERICAN			CANADIAN			EUROPEAN		
ASTM	YIELD STRENGTH		CSA G40.21	YIELD STRENGTH		EN 10248	YIELD STRENGTH	
	(ksi)	(MPa)		(ksi)	(MPa)		(ksi)	(MPa)
A 328	39	270	Grade 260 W	38	260	S 240 GP	35	240
A 572 Grade 42	42	290	Grade 300 W	44	300	S 270 GP	39	270
A 572 Grade 50	50	345	Grade 355 W	50	350	S 320 GP	46	320
A 572 Grade 55	55	380	Grade 400 W	58	400	S 355 GP	51	355
A 572 Grade 60	60	415				S 390 GP	57	390
A 572 Grade 65*	65	450				S 430 GP	62	430
A 588 Grade 50	50	345				S 450 GP*	65	450
API 5L x70	70	485						
ASTM A 690 MARINER®	50	345						

ENGINEERING DISCLAIMER

This publication contains information on the properties of hot-rolled sheet pile based on accepted engineering practices related to sheet pile products and projects. The use of the data contained herein must be supplemented with qualified professional judgment.

LEGAL DISCLAIMER

“The information, including technical and engineering data, figures, tables, designs, drawings, details, suggested procedures, and suggested specifications, presented in this publication are for general information only. While every effort has been made to ensure its accuracy, this information should not be used or relied upon for any specific application without independent competent professional examination and verification of its accuracy, suitability and applicability.

Anyone making use of the material does so at their own risk and assumes any and all liability resulting from such use. **SHEET PILE LLC DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES OF MERCHANTABILITY FITNESS FOR ANY GENERAL OR PARTICULAR PURPOSE OR FREEDOM FROM INFRINGEMENT OF ANY PATENT, TRADEMARK, OR COPYRIGHT IN REGARD TO INFORMATION OR PRODUCTS CONTAINED OR REFERRED TO HEREIN.** Nothing herein contained shall be construed as granting a license, express or implied, under any patents.

These brands and products are supplied exclusively by or through Sheet Pile LLC.



Toll free: 866.666.7453 | +1 512.243.1228 | info@sheet-pile.com | sheet-pile.com

© 2026 Sheet Pile LLC. All rights reserved.