


OZ HR®

sheet-pile.com/oz


PilePro® Sheet Pile Connectors

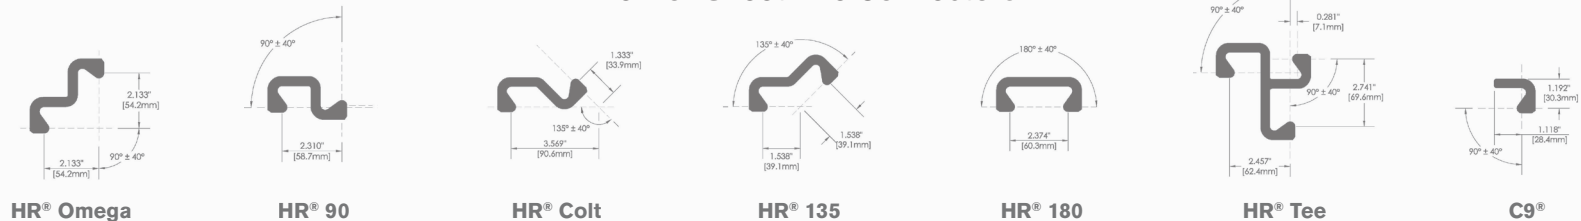

Sheet Pile LLC is the owner and assignee of US 7,390,145, related to these connectors.




Configuration B2

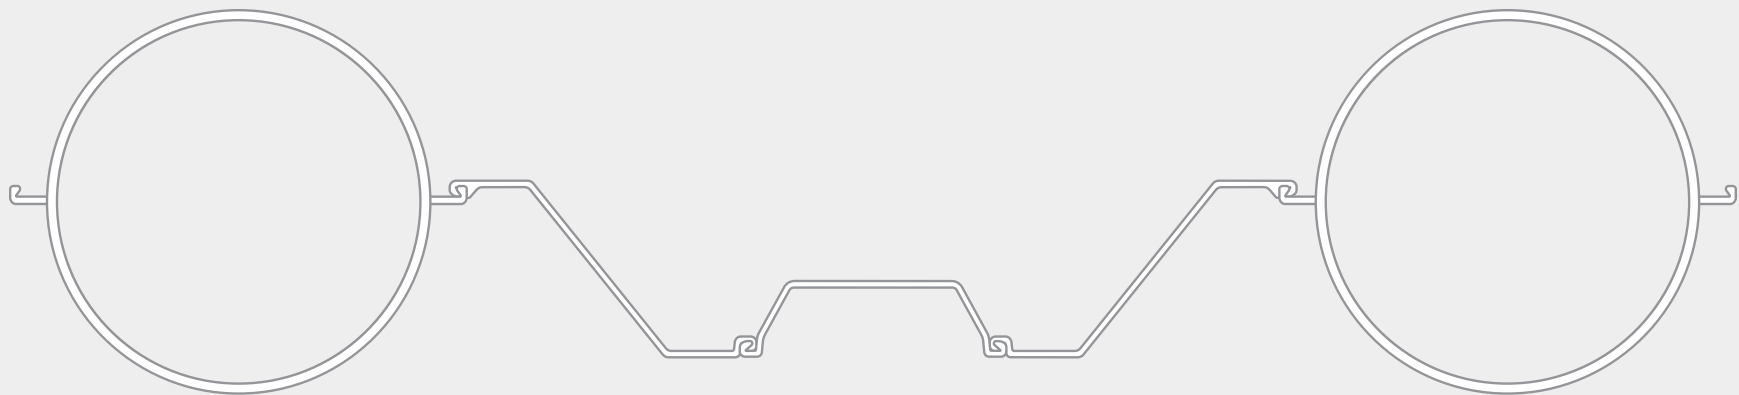

SECTION NAME:

87 - 3714



Section modulus (elastic) in cm³/m ÷ 100

These are examples from a large variety of possible OZ® solutions.

Please configure your own system on sheet-pile.com/oz

Sheet Pile LLC is the owner and assignee of numerous patents and trademarks related to the OZ® system, including, but not limited to, United States Patent Nos. 8,088,469, 8,323,765, and 7,935,406.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
27-2848	OZ®	50.3	112.13	0.625	28	30.3	33.9	37.5	704.7	12.49	25.18	B2
		2706.1	2848.2	15.875	711	148	165.5	183	96227.8	3.81	7.67	
27-2899	OZ®	50.4	114.13	0.562	30	29.2	32.7	36.2	755.3	12.75	25.7	B2
		2707.2	2899	14.288	762	142.4	159.6	176.8	103145.9	3.89	7.83	
27-3102	OZ®	50.5	122.13	0.394	38	25.4	28.7	32	960	13.8	27.8	B2
		2716.4	3102.2	10	965	124.1	140.2	156.2	131094.1	4.21	8.47	
27-3001	OZ®	51	118.13	0.472	34	27.4	30.8	34.2	867.6	13.28	26.75	B2
		2743.7	3000.6	12	863	133.8	150.4	167	118472.3	4.05	8.15	
27-2747	OZ®	51.1	108.13	0.812	24	33.5	37.2	40.9	613.7	11.97	24.13	B2
		2749.4	2746.6	20.638	609	163.5	181.7	199.8	83800.3	3.65	7.36	
28-3051	OZ®	51.5	120.13	0.438	36	26.6	30	33.3	926.5	13.54	27.27	B2
		2767.3	3051.4	11.112	914	130.1	146.4	162.7	126521.3	4.13	8.31	
28-3153	OZ®	51.8	124.13	0.375	40	25.1	28.3	31.5	1035.3	14.06	28.32	B2
		2783.2	3153	9.525	1016	122.4	138.2	154	141384.7	4.29	8.63	
28-2797	OZ®	52.6	110.13	0.75	26	33	36.6	40.3	684.4	12.23	24.65	B2
		2830.4	2797.4	19.05	660	161.1	178.9	196.7	93460.1	3.73	7.51	
29-3001	OZ®	53.4	118.13	0.5	34	28.4	31.8	35.2	907.2	13.28	26.75	B2
		2868.9	3000.6	12.7	863	138.6	155.2	171.8	123880.9	4.05	8.15	
29-2747	OZ®	53.7	108.13	0.875	24	35.1	38.9	42.6	643.9	11.97	24.13	B2
		2884.9	2746.6	22.225	609	171.6	189.7	207.9	87932	3.65	7.36	
29-2848	OZ®	53.9	112.13	0.688	28	32.2	35.8	39.4	754.6	12.49	25.18	B2
		2897.8	2848.2	17.462	711	157.4	174.8	192.3	103045.4	3.81	7.67	
29-3153	OZ®	53.9	124.13	0.394	40	25.8	29.1	32.3	1078.2	14.06	28.32	B2
		2898.4	3153	10	1016	126.1	141.9	157.7	147238.5	4.29	8.63	
29-2950	OZ®	54.3	116.13	0.562	31	29.9	33.4	36.8	869.2	13.01	26.23	B2
		2920.9	2949.8	14.288	812	146	162.9	179.8	118703.6	3.97	7.99	
29-2899	OZ®	54.5	114.13	0.625	30	31.2	34.7	38.2	817	12.75	25.7	B2
		2928.5	2899	15.875	762	152.3	169.5	186.7	111575	3.89	7.83	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	
29-3051	OZ®	54.8	120.13	0.472	36	28	31.3	34.6	985.7	13.54	27.27	B2
		2944.2	3051.4	12	914	136.5	152.8	169.1	134608	4.13	8.31	
30-3102	OZ®	55.1	122.13	0.438	38	27.1	30.4	33.7	1046.8	13.8	27.8	B2
		2962	3102.2	11.112	965	132.4	148.5	164.6	142944.4	4.21	8.47	
30-3204	OZ®	55.1	126.13	0.375	42	25.4	28.6	31.8	1157.7	14.32	28.84	B2
		2963.9	3203.8	9.525	1066	124.2	139.7	155.2	158092.6	4.37	8.79	
30-2747	OZ®	56.1	108.13	0.938	24	36.8	40.5	44.2	673.7	11.97	24.13	B2
		3018.2	2746.6	23.812	609	179.6	197.8	215.9	91994.5	3.65	7.36	
31-3051	OZ®	57.3	120.13	0.5	36	29	32.3	35.7	1032.2	13.54	27.27	B2
		3082.9	3051.4	12.7	914	141.5	157.8	174.2	140952.3	4.13	8.31	
31-2848	OZ®	57.4	112.13	0.75	28	34.1	37.7	41.3	803.8	12.49	25.18	B2
		3086.8	2848.2	19.05	711	166.6	184.1	201.6	109767.6	3.81	7.67	
31-3204	OZ®	57.5	126.13	0.394	42	26.2	29.4	32.6	1206.7	14.32	28.84	B2
		3089.2	3203.8	10	1066	128	143.5	159.1	164779.9	4.37	8.79	
31-2899	OZ®	58.5	114.13	0.688	30	33.2	36.7	40.2	878	12.75	25.7	B2
		3146.8	2899	17.462	762	162.1	179.3	196.5	119894.8	3.89	7.83	
31-2747	OZ®	58.6	108.13	1	24	38.4	42.1	45.9	702.9	11.97	24.13	B2
		3149.2	2746.6	25.4	609	187.6	205.8	223.9	95988.9	3.65	7.36	
32-3001	OZ®	58.6	118.13	0.562	34	30.6	34	37.4	996.2	13.28	26.75	B2
		3150.7	3000.6	14.288	863	149.5	166.1	182.7	136046.5	4.05	8.15	
32-3255	OZ®	58.6	128.13	0.375	43	25.8	28.9	32.1	1290	14.59	29.37	B2
		3152.5	3254.6	9.525	1117	125.9	141.2	156.5	176159.9	4.45	8.95	
32-3102	OZ®	58.7	122.13	0.472	38	28.5	31.8	35.1	1115.5	13.8	27.8	B2
		3156.6	3102.2	12	965	139.1	155.1	171.2	152338	4.21	8.47	
32-3153	OZ®	58.9	124.13	0.438	40	27.6	30.8	34.1	1178.1	14.06	28.32	B2
		3167	3153	11.112	1016	134.7	150.5	166.3	160883	4.29	8.63	
32-2950	OZ®	59	116.13	0.625	31	32	35.5	39	943.4	13.01	26.23	B2
		3170.2	2949.8	15.875	812	156.4	173.3	190.2	128835.2	3.97	7.99	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
33-2848	OZ®	60.9	112.13	0.812	28	36	39.6	43.2	852.3	12.49	25.18	B2
		3273.2	2848.2	20.638	711	175.9	193.3	210.8	116395.3	3.81	7.67	
33-3255	OZ®	61.2	128.13	0.394	43	26.6	29.7	32.9	1345.6	14.59	29.37	B2
		3288.3	3254.6	10	1117	129.8	145.1	160.4	183748.5	4.45	8.95	
33-3102	OZ®	61.6	122.13	0.5	38	29.6	32.8	36.1	1169.5	13.8	27.8	B2
		3309.4	3102.2	12.7	965	144.3	160.4	176.4	159709.6	4.21	8.47	
34-2899	OZ®	62.5	114.13	0.75	30	35.2	38.7	42.3	938.1	12.75	25.7	B2
		3362.4	2899	19.05	762	171.9	189.1	206.3	128105.9	3.89	7.83	
34-3153	OZ®	62.9	124.13	0.472	40	29	32.2	35.5	1257.4	14.06	28.32	B2
		3380	3153	12	1016	141.6	157.4	173.2	171702.5	4.29	8.63	
34-3204	OZ®	62.9	126.13	0.438	42	28	31.2	34.4	1320.8	14.32	28.84	B2
		3381.6	3203.8	11.112	1066	136.9	152.5	168	180372.1	4.37	8.79	
34-3051	OZ®	63.2	120.13	0.562	36	31.3	34.7	38	1136.7	13.54	27.27	B2
		3395.2	3051.4	14.288	914	152.9	169.2	185.5	155230.1	4.13	8.31	
34-2950	OZ®	63.5	116.13	0.688	31	34.2	37.6	41.1	1016.7	13.01	26.23	B2
		3416.4	2949.8	17.462	812	166.8	183.6	200.5	138843.7	3.97	7.99	
34-3001	OZ®	63.8	118.13	0.625	34	32.9	36.3	39.7	1084.3	13.28	26.75	B2
		3429.2	3000.6	15.875	863	160.4	177	193.6	148074.4	4.05	8.15	
35-2848	OZ®	64.3	112.13	0.875	28	37.9	41.5	45.1	900.2	12.49	25.18	B2
		3457	2848.2	22.225	711	185	202.5	220	122929.6	3.81	7.67	
35-3153	OZ®	66	124.13	0.5	40	30.1	33.4	36.6	1319.5	14.06	28.32	B2
		3547.1	3153	12.7	1016	147	162.8	178.6	180195.1	4.29	8.63	
36-3356	OZ®	66.1	132.13	0.375	48	26.5	29.5	32.5	1585.2	15.11	30.41	B2
		3551.2	3356.2	9.525	1219	129.2	144	158.9	216478.5	4.61	9.27	
36-2899	OZ®	66.5	114.13	0.812	30	37.2	40.7	44.3	997.4	12.75	25.7	B2
		3575.1	2899	20.638	762	181.7	198.9	216.1	136210.1	3.89	7.83	
36-3255	OZ®	67.1	128.13	0.438	43	28.5	31.6	34.8	1475.1	14.59	29.37	B2
		3604.9	3254.6	11.112	1117	139.1	154.4	169.7	201444.4	4.45	8.95	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
36-3204	OZ®	67.2	126.13	0.472	42	29.5	32.7	35.9	1411.4	14.32	28.84	B2
		3613.4	3203.8	12	1066	144.1	159.6	175.2	192739.2	4.37	8.79	
36-2848	OZ®	67.7	112.13	0.938	28	39.8	43.4	46.9	947.4	12.49	25.18	B2
		3638.1	2848.2	23.812	711	194.2	211.7	229.2	129371.2	3.81	7.67	
37-3102	OZ®	68	122.13	0.562	38	32	35.3	38.6	1291.1	13.8	27.8	B2
		3653.3	3102.2	14.288	965	156.2	172.2	188.3	176305.8	4.21	8.47	
37-2950	OZ®	68.1	116.13	0.75	31	36.3	39.7	43.2	1089.1	13.01	26.23	B2
		3659.7	2949.8	19.05	812	177.1	194	210.8	148730.1	3.97	7.99	
37-3051	OZ®	68.9	120.13	0.625	36	33.6	37	40.3	1240.2	13.54	27.27	B2
		3704.2	3051.4	15.875	914	164.2	180.6	196.9	169354.7	4.13	8.31	
37-3001	OZ®	68.9	118.13	0.688	34	35.1	38.5	41.9	1171.4	13.28	26.75	B2
		3704.6	3000.6	17.462	863	171.2	187.8	204.4	159965.3	4.05	8.15	
37-3356	OZ®	69	132.13	0.394	48	27.3	30.4	33.4	1655.5	15.11	30.41	B2
		3708.6	3356.2	10	1219	133.4	148.2	163	226074.7	4.61	9.27	
38-3407	OZ®	69.9	134.13	0.375	50	26.8	29.8	32.8	1748.5	15.37	30.94	B2
		3760.3	3407	9.525	1270	130.8	145.4	160	238777.5	4.68	9.43	
38-2899	OZ®	70.4	114.13	0.875	30	39.2	42.7	46.2	1056	12.75	25.7	B2
		3785	2899	22.225	762	191.4	208.6	225.8	144207.7	3.89	7.83	
38-3204	OZ®	70.6	126.13	0.5	42	30.7	33.8	37	1482.5	14.32	28.84	B2
		3795.4	3203.8	12.7	1066	149.7	165.2	180.8	202449.3	4.37	8.79	
38-2848	OZ®	71	112.13	1	28	41.6	45.2	48.8	993.9	12.49	25.18	B2
		3816.7	2848.2	25.4	711	203.3	220.8	238.3	135720.8	3.81	7.67	
39-3255	OZ®	71.7	128.13	0.472	43	30	33.1	36.3	1578	14.59	29.37	B2
		3856.2	3254.6	12	1117	146.4	161.7	177	215484.2	4.45	8.95	
39-2950	OZ®	72.5	116.13	0.812	31	38.4	41.8	45.3	1160.6	13.01	26.23	B2
		3900	2949.8	20.638	812	187.3	204.2	221.1	158496.2	3.97	7.99	
39-3153	OZ®	73	124.13	0.562	40	32.6	35.9	39.1	1459.6	14.06	28.32	B2
		3923.7	3153	14.288	1016	159.3	175.1	190.9	199322.5	4.29	8.63	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
39-3407	OZ®	73.1	134.13	0.394	50	27.7	30.7	33.7	1826.9	15.37	30.94	B2
		3928.9	3407	10	1270	135.1	149.7	164.3	249482.8	4.68	9.43	
40-3458	OZ®	73.9	136.13	0.375	52	27.1	30	33	1922.5	15.63	31.46	B2
		3975.4	3457.8	9.525	1320	132.3	146.7	161.1	262532.2	4.76	9.59	
40-3001	OZ®	74	118.13	0.75	34	37.3	40.7	44.1	1257.5	13.28	26.75	B2
		3976.8	3000.6	19.05	863	182	198.6	215.2	171720.3	4.05	8.15	
40-2899	OZ®	74.3	114.13	0.938	30	41.2	44.7	48.2	1113.8	12.75	25.7	B2
		3992.1	2899	23.812	762	201.1	218.3	235.4	152100	3.89	7.83	
40-3102	OZ®	74.3	122.13	0.625	38	34.4	37.7	41	1411.4	13.8	27.8	B2
		3993.7	3102.2	15.875	965	168	184	200.1	192734.2	4.21	8.47	
40-3051	OZ®	74.6	120.13	0.688	36	36	39.3	42.6	1342.5	13.54	27.27	B2
		4009.8	3051.4	17.462	914	175.6	191.9	208.2	183328	4.13	8.31	
41-3255	OZ®	75.4	128.13	0.5	43	31.2	34.3	37.4	1658.7	14.59	29.37	B2
		4053.5	3254.6	12.7	1117	152.2	167.5	182.8	226509.9	4.45	8.95	
41-3356	OZ®	75.8	132.13	0.438	48	29.3	32.4	35.4	1819.4	15.11	30.41	B2
		4075.8	3356.2	11.112	1219	143.2	158	172.8	248460.8	4.61	9.27	
41-2950	OZ®	77	116.13	0.875	31	40.5	43.9	47.4	1231.3	13.01	26.23	B2
		4137.4	2949.8	22.225	812	197.5	214.4	231.3	168142.2	3.97	7.99	
42-3458	OZ®	77.3	136.13	0.394	52	28	30.9	33.9	2009.5	15.63	31.46	B2
		4155.3	3457.8	10	1320	136.7	151.1	165.5	274419	4.76	9.59	
42-3509	OZ®	78	138.13	0.375	53	27.4	30.3	33.2	2107.3	15.89	31.98	B2
		4196	3508.6	9.525	1371	133.8	148	162.2	287763.8	4.84	9.75	
42-2899	OZ®	78.1	114.13	1	30	43.2	46.7	50.2	1170.8	12.75	25.7	B2
		4196.5	2899	25.4	762	210.7	227.9	245.1	159887.5	3.89	7.83	
42-3204	OZ®	78.2	126.13	0.562	42	33.3	36.4	39.6	1642.7	14.32	28.84	B2
		4205.6	3203.8	14.288	1066	162.4	177.9	193.5	224325.8	4.37	8.79	
42-3001	OZ®	79	118.13	0.812	34	39.5	42.9	46.3	1342.6	13.28	26.75	B2
		4246	3000.6	20.638	863	192.8	209.4	226	183340.3	4.05	8.15	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)				
43-3153	OZ [®]	79.9	124.13	0.625	40	35.1	38.4	41.6	1598.3	14.06	28.32	B2
		4296.6	3153	15.875	1016	171.6	187.4	203.2	218266.4	4.29	8.63	
43-3051	OZ [®]	80.2	120.13	0.75	36	38.3	41.6	44.9	1443.7	13.54	27.27	B2
		4312.1	3051.4	19.05	914	186.8	203.1	219.5	197150.5	4.13	8.31	
43-3407	OZ [®]	80.4	134.13	0.438	50	29.7	32.7	35.7	2009.8	15.37	30.94	B2
		4322.2	3407	11.112	1270	145.1	159.7	174.4	274460.8	4.68	9.43	
43-3102	OZ [®]	80.5	122.13	0.688	38	36.8	40.1	43.4	1530.4	13.8	27.8	B2
		4330.6	3102.2	17.462	965	179.7	195.8	211.8	208995.6	4.21	8.47	
44-3356	OZ [®]	81.2	132.13	0.472	48	30.9	34	37	1949.6	15.11	30.41	B2
		4367.3	3356.2	12	1219	151	165.8	180.6	266230	4.61	9.27	
44-2950	OZ [®]	81.3	116.13	0.938	31	42.5	46	49.5	1301	13.01	26.23	B2
		4371.8	2949.8	23.812	812	207.7	224.6	241.5	177669.3	3.97	7.99	
44-3509	OZ [®]	81.6	138.13	0.394	53	28.3	31.2	34.1	2203.5	15.89	31.98	B2
		4387.6	3508.6	10	1371	138.3	152.5	166.7	300904.6	4.84	9.75	
44-3559	OZ [®]	82.2	140.13	0.375	56	27.7	30.6	33.4	2303	16.16	32.51	B2
		4422	3559.4	9.525	1422	135.2	149.2	163.2	314492	4.92	9.91	
45-3255	OZ [®]	83.7	128.13	0.562	43	33.9	37	40.1	1840.7	14.59	29.37	B2
		4498.2	3254.6	14.288	1117	165.4	180.7	196	251357.8	4.45	8.95	
45-3001	OZ [®]	83.9	118.13	0.875	34	41.7	45.1	48.5	1426.7	13.28	26.75	B2
		4512	3000.6	22.225	863	203.5	220.1	236.7	194826.7	4.05	8.15	
46-3458	OZ [®]	85.1	136.13	0.438	52	30.1	33.1	36	2212.7	15.63	31.46	B2
		4575.4	3457.8	11.112	1320	147	161.4	175.8	302157.2	4.76	9.59	
46-3356	OZ [®]	85.5	132.13	0.5	48	32.2	35.2	38.3	2051.8	15.11	30.41	B2
		4596.3	3356.2	12.7	1219	157.1	171.9	186.8	280189.5	4.61	9.27	
46-2950	OZ [®]	85.6	116.13	1	31	44.6	48.1	51.5	1369.9	13.01	26.23	B2
		4603.3	2949.8	25.4	812	217.9	234.7	251.6	187078.8	3.97	7.99	
46-3051	OZ [®]	85.8	120.13	0.812	36	40.6	43.9	47.2	1543.8	13.54	27.27	B2
		4611.2	3051.4	20.638	914	198	214.4	230.7	210823.9	4.13	8.31	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	
46-3204	OZ®	85.8	126.13	0.625	42	35.9	39	42.2	1801.4	14.32	28.84	B2
		4612	3203.8	15.875	1066	175.1	190.6	206.1	246002.2	4.37	8.79	
46-3559	OZ®	86	140.13	0.394	56	28.6	31.5	34.4	2408.9	16.16	32.51	B2
		4625.4	3559.4	10	1422	139.8	153.8	167.8	328960.8	4.92	9.91	
46-3407	OZ®	86.2	134.13	0.472	50	31.4	34.4	37.4	2155.1	15.37	30.94	B2
		4634.5	3407	12	1270	153.1	167.7	182.4	294291.8	4.68	9.43	
47-3102	OZ®	86.8	122.13	0.75	38	39.2	42.5	45.8	1648.3	13.8	27.8	B2
		4664.1	3102.2	19.05	965	191.4	207.5	223.6	225091.5	4.21	8.47	
47-3153	OZ®	86.8	124.13	0.688	40	37.6	40.9	44.1	1735.7	14.06	28.32	B2
		4665.9	3153	17.462	1016	183.8	199.6	215.4	237027.6	4.29	8.63	
48-3001	OZ®	88.8	118.13	0.938	34	43.9	47.3	50.7	1509.8	13.28	26.75	B2
		4774.9	3000.6	23.812	863	214.1	230.7	247.3	206180.1	4.05	8.15	
48-3509	OZ®	89.9	138.13	0.438	53	30.5	33.4	36.3	2428.1	15.89	31.98	B2
		4834.9	3508.6	11.112	1371	148.8	163	177.2	331574.7	4.84	9.75	
49-3407	OZ®	90.8	134.13	0.5	50	32.7	35.6	38.6	2269.2	15.37	30.94	B2
		4879.9	3407	12.7	1270	159.4	174.1	188.7	309873.2	4.68	9.43	
49-3051	OZ®	91.3	120.13	0.875	36	42.9	46.2	49.5	1642.9	13.54	27.27	B2
		4907	3051.4	22.225	914	209.2	225.5	241.9	224348.8	4.13	8.31	
49-3458	OZ®	91.3	136.13	0.472	52	31.8	34.7	37.7	2373.9	15.63	31.46	B2
		4908.9	3457.8	12	1320	155.2	169.6	184	324183.9	4.76	9.59	
49-3255	OZ®	91.9	128.13	0.625	43	36.5	39.7	42.8	2021	14.59	29.37	B2
		4939	3254.6	15.875	1117	178.4	193.7	209	275989.1	4.45	8.95	
50-3102	OZ®	92.9	122.13	0.812	38	41.6	44.9	48.2	1765	13.8	27.8	B2
		4994.3	3102.2	20.638	965	203.1	219.2	235.2	241022.8	4.21	8.47	
50-3204	OZ®	93.3	126.13	0.688	42	38.4	41.6	44.8	1958.7	14.32	28.84	B2
		5014.6	3203.8	17.462	1066	187.7	203.2	218.8	267480.2	4.37	8.79	
50-3153	OZ®	93.6	124.13	0.75	40	40.1	43.4	46.6	1871.8	14.06	28.32	B2
		5031.6	3153	19.05	1016	195.9	211.7	227.5	255607.7	4.29	8.63	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
50-3001	OZ®	93.6	118.13	1	34	46	49.4	52.8	1592	13.28	26.75	B2
		5034.8	3000.6	25.4	863	224.8	241.4	258	217401.9	4.05	8.15	
51-3559	OZ®	94.9	140.13	0.438	56	30.9	33.7	36.6	2656.2	16.16	32.51	B2
		5100.3	3559.4	11.112	1422	150.6	164.6	178.6	362733.3	4.92	9.91	
51-3356	OZ®	95.1	132.13	0.562	48	35	38.1	41.1	2282.3	15.11	30.41	B2
		5112.6	3356.2	14.288	1219	171	185.9	200.7	311666.2	4.61	9.27	
52-3458	OZ®	96.2	136.13	0.5	52	33.1	36.1	39	2500.7	15.63	31.46	B2
		5171	3457.8	12.7	1320	161.7	176.1	190.5	341492.6	4.76	9.59	
52-3509	OZ®	96.5	138.13	0.472	53	32.2	35.1	38	2606.4	15.89	31.98	B2
		5190	3508.6	12	1371	157.3	171.5	185.7	355932	4.84	9.75	
52-3051	OZ®	96.7	120.13	0.938	36	45.1	48.5	51.8	1740.8	13.54	27.27	B2
		5199.6	3051.4	23.812	914	220.4	236.7	253	237726.3	4.13	8.31	
53-3102	OZ®	99	122.13	0.875	38	44	47.3	50.6	1880.4	13.8	27.8	B2
		5321	3102.2	22.225	965	214.8	230.8	246.9	256790.7	4.21	8.47	
54-3255	OZ®	100	128.13	0.688	43	39.2	42.4	45.5	2199.8	14.59	29.37	B2
		5375.9	3254.6	17.462	1117	191.5	206.8	222.1	300405.6	4.45	8.95	
54-3153	OZ®	100.3	124.13	0.812	40	42.6	45.8	49.1	2006.5	14.06	28.32	B2
		5393.9	3153	20.638	1016	208.1	223.9	239.6	274007.6	4.29	8.63	
54-3204	OZ®	100.7	126.13	0.75	42	41	44.2	47.4	2114.6	14.32	28.84	B2
		5413.6	3203.8	19.05	1066	200.3	215.8	231.4	288760.8	4.37	8.79	
54-3407	OZ®	101.1	134.13	0.562	50	35.6	38.6	41.6	2526.5	15.37	30.94	B2
		5433.3	3407	14.288	1270	173.7	188.3	203	345014.1	4.68	9.43	
55-3509	OZ®	101.7	138.13	0.5	53	33.6	36.5	39.4	2746.6	15.89	31.98	B2
		5469.2	3508.6	12.7	1371	163.9	178.1	192.3	375076.4	4.84	9.75	
55-3559	OZ®	101.9	140.13	0.472	56	32.6	35.5	38.3	2852.7	16.16	32.51	B2
		5477.5	3559.4	12	1422	159.2	173.2	187.2	389560.9	4.92	9.91	
55-3051	OZ®	102.1	120.13	1	36	47.4	50.8	54.1	1837.7	13.54	27.27	B2
		5489	3051.4	25.4	914	231.5	247.8	264.1	250957.9	4.13	8.31	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)				
56-3356	OZ [®]	104.6	132.13	0.625	48	37.9	40.9	43.9	2510.9	15.11	30.41	B2
		5624.9	3356.2	15.875	1219	184.9	199.7	214.6	342891.7	4.61	9.27	
56-3102	OZ [®]	105	122.13	0.938	38	46.4	49.7	52.9	1994.7	13.8	27.8	B2
		5644.4	3102.2	23.812	965	226.4	242.4	258.5	272396.4	4.21	8.47	
58-3153	OZ [®]	107	124.13	0.875	40	45.1	48.3	51.6	2139.9	14.06	28.32	B2
		5752.5	3153	22.225	1016	220.1	235.9	251.7	292228.7	4.29	8.63	
58-3458	OZ [®]	107.2	136.13	0.562	52	36.1	39.1	42	2786.6	15.63	31.46	B2
		5762.3	3457.8	14.288	1320	176.3	190.7	205.2	380540.5	4.76	9.59	
58-3559	OZ [®]	107.4	140.13	0.5	56	34	36.9	39.7	3007.1	16.16	32.51	B2
		5774	3559.4	12.7	1422	166	180	194	410648.7	4.92	9.91	
58-3204	OZ [®]	108	126.13	0.812	42	43.6	46.8	50	2268.9	14.32	28.84	B2
		5808.9	3203.8	20.638	1066	212.8	228.4	243.9	309845.2	4.37	8.79	
58-3255	OZ [®]	108	128.13	0.75	43	41.9	45	48.1	2377.1	14.59	29.37	B2
		5809	3254.6	19.05	1117	204.5	219.8	235.1	324607.9	4.45	8.95	
60-3102	OZ [®]	110.9	122.13	1	38	48.7	52	55.3	2107.8	13.8	27.8	B2
		5964.4	3102.2	25.4	965	237.9	254	270	287840.9	4.21	8.47	
60-3407	OZ [®]	111.3	134.13	0.625	50	38.5	41.5	44.5	2781.9	15.37	30.94	B2
		5982.5	3407	15.875	1270	188	202.6	217.2	379889.3	4.68	9.43	
61-3509	OZ [®]	113.4	138.13	0.562	53	36.6	39.5	42.5	3062.9	15.89	31.98	B2
		6099	3508.6	14.288	1371	178.9	193.1	207.3	418270.3	4.84	9.75	
61-3153	OZ [®]	113.6	124.13	0.938	40	47.6	50.8	54	2272.1	14.06	28.32	B2
		6107.7	3153	23.812	1016	232.2	248	263.8	310272.1	4.29	8.63	
61-3356	OZ [®]	114.1	132.13	0.688	48	40.7	43.7	46.8	2737.8	15.11	30.41	B2
		6133	3356.2	17.462	1219	198.7	213.6	228.4	373867.2	4.61	9.27	
62-3204	OZ [®]	115.3	126.13	0.875	42	46.2	49.3	52.5	2421.9	14.32	28.84	B2
		6200.5	3203.8	22.225	1066	225.3	240.9	256.4	330734.8	4.37	8.79	
62-3255	OZ [®]	116	128.13	0.812	43	44.5	47.7	50.8	2552.7	14.59	29.37	B2
		6238.3	3254.6	20.638	1117	217.4	232.8	248.1	348596.8	4.45	8.95	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
63-3458	OZ®	118.1	136.13	0.625	52	39.1	42.1	45	3070.5	15.63	31.46	B2
		6349.2	3457.8	15.875	1320	191	205.4	219.8	419299.3	4.76	9.59	
64-3661	OZ®	119.1	144.13	0.5	60	34.8	37.6	40.4	3572.5	16.68	33.56	B2
		6402.4	3661	12.7	1524	170.1	183.7	197.3	487859.3	5.08	10.23	
64-3559	OZ®	119.8	140.13	0.562	56	37.1	40	42.9	3355.6	16.16	32.51	B2
		6443.1	3559.4	14.288	1422	181.4	195.4	209.4	458235.4	4.92	9.91	
65-3153	OZ®	120.1	124.13	1	40	50	53.2	56.5	2402.9	14.06	28.32	B2
		6459.4	3153	25.4	1016	244.2	260	275.8	328138.7	4.29	8.63	
65-3407	OZ®	121.4	134.13	0.688	50	41.4	44.4	47.4	3035.3	15.37	30.94	B2
		6527.5	3407	17.462	1270	202.2	216.8	231.4	414494.6	4.68	9.43	
66-3204	OZ®	122.5	126.13	0.938	42	48.7	51.9	55.1	2573.5	14.32	28.84	B2
		6588.5	3203.8	23.812	1066	237.8	253.4	268.9	351430.5	4.37	8.79	
66-3356	OZ®	123.4	132.13	0.75	48	43.5	46.6	49.6	2962.8	15.11	30.41	B2
		6637.1	3356.2	19.05	1219	212.5	227.4	242.2	404595.4	4.61	9.27	
67-3255	OZ®	123.9	128.13	0.875	43	47.2	50.3	53.5	2726.8	14.59	29.37	B2
		6663.8	3254.6	22.225	1117	230.4	245.7	261	372375.4	4.45	8.95	
67-3509	OZ®	125.1	138.13	0.625	53	39.7	42.6	45.5	3377	15.89	31.98	B2
		6724.4	3508.6	15.875	1371	193.9	208.1	222.2	461159.2	4.84	9.75	
69-3458	OZ®	128.9	136.13	0.688	52	42.1	45	48	3352.2	15.63	31.46	B2
		6931.8	3457.8	17.462	1320	205.5	219.9	234.3	457774.6	4.76	9.59	
70-3204	OZ®	129.7	126.13	1	42	51.3	54.4	57.6	2723.6	14.32	28.84	B2
		6972.9	3203.8	25.4	1066	250.2	265.8	281.3	371934.1	4.37	8.79	
71-3407	OZ®	131.5	134.13	0.75	50	44.3	47.3	50.3	3286.8	15.37	30.94	B2
		7068.3	3407	19.05	1270	216.4	231	245.6	448835.6	4.68	9.43	
71-3255	OZ®	131.8	128.13	0.938	43	49.8	53	56.1	2899.4	14.59	29.37	B2
		7085.6	3254.6	23.812	1117	243.3	258.6	273.9	395945.1	4.45	8.95	
71-3559	OZ®	132.2	140.13	0.625	56	40.3	43.1	46	3701.7	16.16	32.51	B2
		7107.7	3559.4	15.875	1422	196.7	210.7	224.7	505501.8	4.92	9.91	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
71-3356	OZ®	132.7	132.13	0.812	48	46.3	49.4	52.4	3186	15.11	30.41	B2
		7137.1	3356.2	20.638	1219	226.3	241.1	256	435076.3	4.61	9.27	
72-3661	OZ®	133	144.13	0.562	60	38.1	40.9	43.7	3990.8	16.68	33.56	B2
		7152	3661	14.288	1524	186.1	199.7	213.3	544985.8	5.08	10.23	
73-3509	OZ®	136.6	138.13	0.688	53	42.8	45.7	48.6	3688.9	15.89	31.98	B2
		7345.4	3508.6	17.462	1371	208.8	223	237.2	503745.9	4.84	9.75	
75-3255	OZ®	139.6	128.13	1	43	52.5	55.6	58.7	3070.5	14.59	29.37	B2
		7503.6	3254.6	25.4	1117	256.1	271.4	286.7	419302.8	4.45	8.95	
75-3458	OZ®	139.7	136.13	0.75	52	45.1	48	51	3631.9	15.63	31.46	B2
		7510.1	3457.8	19.05	1320	220.1	234.5	248.9	495966.5	4.76	9.59	
76-3407	OZ®	141.5	134.13	0.812	50	47.2	50.2	53.2	3536.3	15.37	30.94	B2
		7604.9	3407	20.638	1270	230.5	245.1	259.7	482912.5	4.68	9.43	
76-3356	OZ®	142	132.13	0.875	48	49.2	52.2	55.2	3407.4	15.11	30.41	B2
		7633.1	3356.2	22.225	1219	240	254.8	269.7	465312.9	4.61	9.27	
78-3559	OZ®	144.5	140.13	0.688	56	43.4	46.3	49.1	4045.5	16.16	32.51	B2
		7767.7	3559.4	17.462	1422	212	226	239.9	552442.3	4.92	9.91	
79-3661	OZ®	146.9	144.13	0.625	60	41.4	44.2	47	4406.5	16.68	33.56	B2
		7897	3661	15.875	1524	202.1	215.7	229.3	601751.7	5.08	10.23	
80-3509	OZ®	148.1	138.13	0.75	53	45.8	48.7	51.6	3998.5	15.89	31.98	B2
		7961.9	3508.6	19.05	1371	223.7	237.9	252.1	546027.8	4.84	9.75	
81-3458	OZ®	150.4	136.13	0.812	52	48	51	53.9	3909.5	15.63	31.46	B2
		8084.1	3457.8	20.638	1320	234.6	249	263.4	533875	4.76	9.59	
81-3356	OZ®	151.1	132.13	0.938	48	52	55	58	3627	15.11	30.41	B2
		8125.1	3356.2	23.812	1219	253.7	268.5	283.4	495305.1	4.61	9.27	
81-3407	OZ®	151.4	134.13	0.875	50	50.1	53.1	56.1	3783.9	15.37	30.94	B2
		8137.4	3407	22.225	1270	244.6	259.2	273.8	516725.3	4.68	9.43	
84-3559	OZ®	156.7	140.13	0.75	56	46.5	49.4	52.3	4386.9	16.16	32.51	B2
		8423.3	3559.4	19.05	1422	227.2	241.2	255.2	599065.3	4.92	9.91	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
86-3509	OZ®	159.5	138.13	0.812	53	48.9	51.8	54.7	4305.9	15.89	31.98	B2
		8574.1	3508.6	20.638	1371	238.6	252.7	266.9	588010.3	4.84	9.75	
86-3356	OZ®	160.2	132.13	1	48	54.8	57.8	60.8	3844.9	15.11	30.41	B2
		8613.1	3356.2	25.4	1219	267.3	282.2	297	525054.1	4.61	9.27	
86-3661	OZ®	160.7	144.13	0.688	60	44.7	47.4	50.2	4819.6	16.68	33.56	B2
		8637.2	3661	17.462	1524	218	231.6	245.2	658157.1	5.08	10.23	
87-3458	OZ®	161	136.13	0.875	52	51	54	56.9	4185	15.63	31.46	B2
		8653.8	3457.8	22.225	1320	249	263.5	277.9	571500.1	4.76	9.59	
87-3407	OZ®	161.2	134.13	0.938	50	53	56	59	4029.6	15.37	30.94	B2
		8665.8	3407	23.812	1270	258.7	273.3	287.9	550276.8	4.68	9.43	
91-3559	OZ®	168.8	140.13	0.812	56	49.6	52.5	55.4	4725.9	16.16	32.51	B2
		9074.3	3559.4	20.638	1422	242.4	256.4	270.4	645365.2	4.92	9.91	
92-3509	OZ®	170.8	138.13	0.875	53	51.9	54.8	57.7	4611.2	15.89	31.98	B2
		9181.9	3508.6	22.225	1371	253.4	267.6	281.8	629693.6	4.84	9.75	
92-3407	OZ®	170.9	134.13	1	50	55.8	58.8	61.8	4273.4	15.37	30.94	B2
		9190	3407	25.4	1270	272.7	287.3	301.9	583566.3	4.68	9.43	
92-3458	OZ®	171.5	136.13	0.938	52	54	56.9	59.9	4458.5	15.63	31.46	B2
		9219.4	3457.8	23.812	1320	263.5	277.9	292.3	608850.4	4.76	9.59	
94-3661	OZ®	174.3	144.13	0.75	60	47.9	50.7	53.5	5230	16.68	33.56	B2
		9372.7	3661	19.05	1524	233.9	247.5	261.1	714201.9	5.08	10.23	
97-3559	OZ®	180.8	140.13	0.875	56	52.8	55.6	58.5	5062.6	16.16	32.51	B2
		9720.9	3559.4	22.225	1422	257.6	271.6	285.6	691347.7	4.92	9.91	
98-3458	OZ®	181.9	136.13	1	52	56.9	59.9	62.8	4730	15.63	31.46	B2
		9780.7	3457.8	25.4	1320	277.9	292.3	306.7	645918.3	4.76	9.59	
98-3509	OZ®	182	138.13	0.938	53	54.9	57.8	60.7	4914.2	15.89	31.98	B2
		9785.3	3508.6	23.812	1371	268.2	282.4	296.6	671077.6	4.84	9.75	
101-3661	OZ®	187.9	144.13	0.812	60	51.2	54	56.7	5637.8	16.68	33.56	B2
		10103.5	3661	20.638	1524	249.8	263.4	277	769886.1	5.08	10.23	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
104-3559	OZ®	192.8	140.13	0.938	56	55.9	58.7	61.6	5397.1	16.16	32.51	B2
		10363	3559.4	23.812	1422	272.7	286.7	300.7	737015.5	4.92	9.91	
104-3509	OZ®	193.2	138.13	1	53	57.9	60.9	63.8	5215.1	15.89	31.98	B2
		10384.5	3508.6	25.4	1371	282.9	297.1	311.3	712166.9	4.84	9.75	
108-3661	OZ®	201.4	144.13	0.875	60	54.4	57.2	60	6042.9	16.68	33.56	B2
		10829.6	3661	22.225	1524	265.6	279.3	292.9	825218	5.08	10.23	
110-3559	OZ®	204.6	140.13	1	56	59	61.8	64.7	5729.1	16.16	32.51	B2
		11000.6	3559.4	25.4	1422	287.8	301.8	315.8	782365.8	4.92	9.91	
116-3661	OZ®	214.9	144.13	0.938	60	57.6	60.4	63.2	6445.5	16.68	33.56	B2
		11551.1	3661	23.812	1524	281.5	295.1	308.7	880192	5.08	10.23	
123-3661	OZ®	228.2	144.13	1	60	60.9	63.7	66.4	6845.5	16.68	33.56	B2
		12267.9	3661	25.4	1524	297.2	310.8	324.4	934813.7	5.08	10.23	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Specifications

When using steel sheet pile, it is necessary to make allowances for deviations from theoretical exactness. The degree of precision obtainable in the production of sheet pile is limited by the basic character of the rolling processes and normal limitations of mill equipment. Care must be taken during installation to assure that each element is being set at the desired driving dimension.

- Dimensions typically shown are nominal.
- Actual thicknesses vary due to mill rolling practices; however, permitted variations for such dimensions are not addressed.
- Interlocks should be reasonably free-sliding when threaded.
- Terms, tolerance, dimensions, and delivery conditions are in accordance with EN 10248 and/or ASTM A6.
- Welding is in accordance with AWS D1.1.

	AMERICAN ASTM A 6		EUROPEAN EN 10248
Mass	5%	-2.5%	± 5%
Length	+ 5in.	-0 in.	± 200mm
Height			± 7mm
Thickness			± 0.5mm for ≤ 8.5mm ± 6% for > 8.5mm
Width Interlocked			± 3%
Straightness			0.2% of the length
Ends ou of Square			2% of the width

Available Steel Grades

AMERICAN			CANADIAN			EUROPEAN		
ASTM	YIELD STRENGTH		CSA G40.21	YIELD STRENGTH		EN 10248	YIELD STRENGTH	
	(ksi)	(MPa)		(ksi)	(MPa)		(ksi)	(MPa)
A 328	39	270	Grade 260 W	38	260	S 240 GP	35	240
A 572 Grade 42	42	290	Grade 300 W	44	300	S 270 GP	39	270
A 572 Grade 50	50	345	Grade 355 W	50	350	S 320 GP	46	320
A 572 Grade 55	55	380	Grade 400 W	58	400	S 355 GP	51	355
A 572 Grade 60	60	415				S 390 GP	57	390
A 572 Grade 65*	65	450				S 430 GP	62	430
A 588 Grade 50	50	345				S 450 GP*	65	450
API 5L x70	70	485						
ASTM A 690 MARINER®	50	345						

ENGINEERING DISCLAIMER

This publication contains information on the properties of hot-rolled sheet pile based on accepted engineering practices related to sheet pile products and projects. The use of the data contained herein must be supplemented with qualified professional judgment.

LEGAL DISCLAIMER

“The information, including technical and engineering data, figures, tables, designs, drawings, details, suggested procedures, and suggested specifications, presented in this publication are for general information only. While every effort has been made to ensure its accuracy, this information should not be used or relied upon for any specific application without independent competent professional examination and verification of its accuracy, suitability and applicability.

Anyone making use of the material does so at their own risk and assumes any and all liability resulting from such use. **SHEET PILE LLC DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES OF MERCHANTABILITY FITNESS FOR ANY GENERAL OR PARTICULAR PURPOSE OR FREEDOM FROM INFRINGEMENT OF ANY PATENT, TRADEMARK, OR COPYRIGHT IN REGARD TO INFORMATION OR PRODUCTS CONTAINED OR REFERRED TO HEREIN.** Nothing herein contained shall be construed as granting a license, express or implied, under any patents.

These brands and products are supplied exclusively by or through Sheet Pile LLC.



Toll free: 866.666.7453 | +1 512.243.1228 | info@sheet-pile.com | sheet-pile.com

© 2026 Sheet Pile LLC. All rights reserved.