


LARSEN
HOT ROLLED




sheet-pile.com/oz


PilePro® Sheet Pile Connectors




HR® Omega



HR® 90




HR® Colt




HR® 135



HR® 180



HR® Tee




C9®

Sheet Pile LLC is the owner and assignee of US 7,390,145, related to these connectors.




Configuration B3

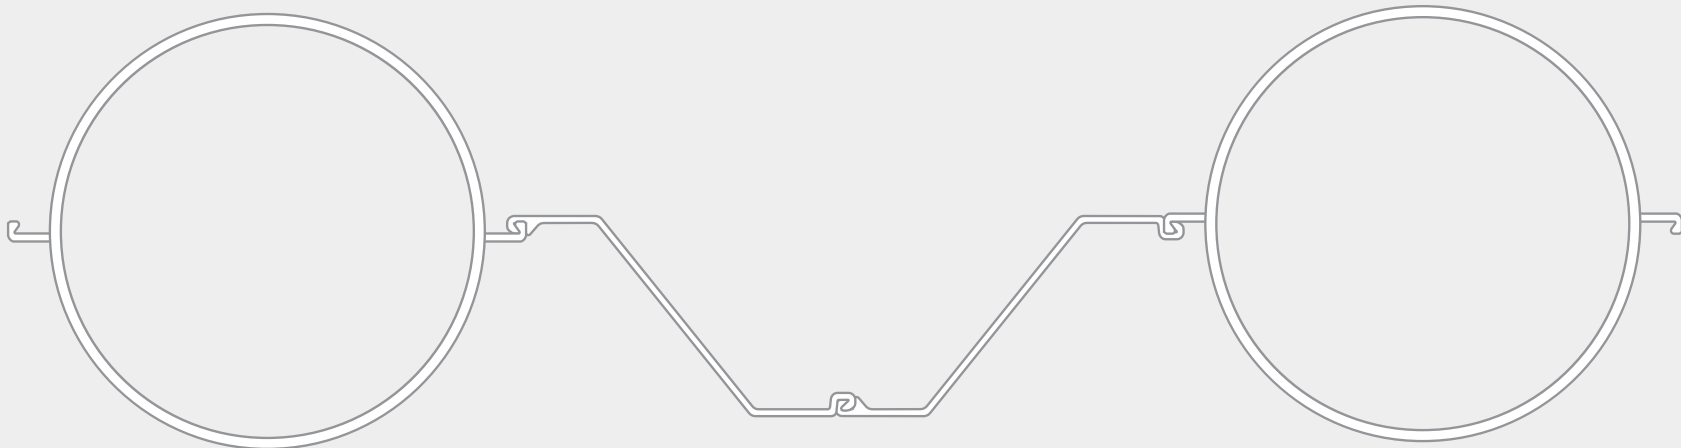

SECTION NAME:

87 - 3714



Section modulus (elastic) in $\text{cm}^3/\text{m} \div 100$

These are examples from a large variety of possible OZ® solutions.

Please configure your own system on sheet-pile.com/oz

Sheet Pile LLC is the owner and assignee of numerous patents and trademarks related to the OZ® system, including, but not limited to, United States Patent Nos. 8,088,469, 8,323,765, and 7,935,406.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
27-2287	OZ®	50.8	90.02	0.75	24	34.6	37.8	41	609.2	3.14	19.14	B3
		2729.3	2286.6	19.05	609	168.7	184.5	200.3	83190.2	0.96	5.84	
27-2490	OZ®	51.1	98.02	0.472	31	28.4	31.4	34.4	817.8	4.19	21.24	B3
		2747.9	2489.8	12	812	138.7	153.2	167.7	111672.7	1.28	6.47	
28-2591	OZ®	51.3	102.02	0.394	36	26.2	29	31.9	922.7	4.71	22.29	B3
		2756	2591.4	10	914	127.9	141.8	155.8	126002.1	1.44	6.79	
28-2541	OZ®	51.9	100.02	0.438	34	27.6	30.5	33.4	883.1	4.45	21.76	B3
		2792.9	2540.6	11.112	863	134.6	148.8	163.1	120598.2	1.36	6.63	
28-2642	OZ®	52.9	104.02	0.375	38	25.8	28.6	31.4	1004.7	4.97	22.81	B3
		2842.9	2642.2	9.525	965	126	139.7	153.3	137197	1.52	6.95	
29-2490	OZ®	53.6	98.02	0.5	31	29.5	32.5	35.5	857.3	4.19	21.24	B3
		2880.8	2489.8	12.7	812	144.2	158.7	173.2	117077.2	1.28	6.47	
29-2388	OZ®	53.8	94.02	0.625	28	32.6	35.7	38.8	753.3	3.67	20.19	B3
		2892.8	2388.2	15.875	711	159.4	174.5	189.6	102869.4	1.12	6.15	
29-2287	OZ®	53.8	90.02	0.812	24	36.6	39.8	43	646.1	3.14	19.14	B3
		2894.9	2286.6	20.638	609	178.5	194.3	210.1	88237	0.96	5.84	
29-2439	OZ®	54.2	96.02	0.562	30	31.2	34.3	37.3	812.5	3.93	20.71	B3
		2912.2	2439	14.288	762	152.5	167.3	182.1	110954	1.2	6.31	
30-2642	OZ®	55.2	104.02	0.394	38	26.7	29.5	32.3	1048.4	4.97	22.81	B3
		2966.6	2642.2	10	965	130.2	143.8	157.5	143167.4	1.52	6.95	
30-2541	OZ®	55.5	100.02	0.472	34	29.1	32	34.9	942.8	4.45	21.76	B3
		2981.5	2540.6	12	863	141.9	156.1	170.3	128743.1	1.36	6.63	
30-2591	OZ®	56.1	102.02	0.438	36	28.1	31	33.8	1010.7	4.71	22.29	B3
		3018.8	2591.4	11.112	914	137.3	151.3	165.2	138019.5	1.44	6.79	
30-2337	OZ®	56.2	92.02	0.75	26	35.9	39.1	42.2	730.1	3.4	19.67	B3
		3019.4	2337.4	19.05	660	175.3	190.7	206.2	99701.4	1.04	5.99	
31-2693	OZ®	56.7	106.02	0.375	40	26.2	29	31.7	1135	5.24	23.33	B3
		3050.9	2693	9.525	1016	128	141.4	154.9	154988	1.6	7.11	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
31-2287	OZ®	56.9	90.02	0.875	24	38.5	41.8	45	682.5	3.14	19.14	B3
		3057.7	2286.6	22.225	609	188.2	204	219.8	93199.9	0.96	5.84	
31-2388	OZ®	58.1	94.02	0.688	28	34.9	38	41.1	812.8	3.67	20.19	B3
		3121.5	2388.2	17.462	711	170.5	185.6	200.7	111000.3	1.12	6.15	
31-2541	OZ®	58.2	100.02	0.5	34	30.2	33.1	36	989.5	4.45	21.76	B3
		3129.5	2540.6	12.7	863	147.6	161.8	176	135131	1.36	6.63	
32-2439	OZ®	59.1	96.02	0.625	30	33.6	36.7	39.7	885.9	3.93	20.71	B3
		3175.1	2439	15.875	762	164.2	179	193.8	120972.9	1.2	6.31	
32-2490	OZ®	59.1	98.02	0.562	31	32.1	35	38	946.3	4.19	21.24	B3
		3179.8	2489.8	14.288	812	156.5	171	185.6	129226.8	1.28	6.47	
32-2693	OZ®	59.3	106.02	0.394	40	27.1	29.9	32.6	1185.1	5.24	23.33	B3
		3185.9	2693	10	1016	132.4	145.8	159.2	161841.7	1.6	7.11	
32-2287	OZ®	59.9	90.02	0.938	24	40.5	43.8	47	718.2	3.14	19.14	B3
		3217.8	2286.6	23.812	609	197.8	213.6	229.4	98079.6	0.96	5.84	
32-2591	OZ®	60	102.02	0.472	36	29.7	32.5	35.4	1080.4	4.71	22.29	B3
		3227.1	2591.4	12	914	144.9	158.8	172.8	147541.8	1.44	6.79	
33-2642	OZ®	60.5	104.02	0.438	38	28.7	31.5	34.3	1150.3	4.97	22.81	B3
		3254.9	2642.2	11.112	965	140	153.6	167.3	157080.8	1.52	6.95	
33-2744	OZ®	60.8	108.02	0.375	42	26.6	29.3	32	1276	5.5	23.86	B3
		3266.7	2743.8	9.525	1066	130	143.2	156.3	174245.1	1.68	7.27	
33-2388	OZ®	62.3	94.02	0.75	28	37.2	40.3	43.4	871.5	3.67	20.19	B3
		3346.9	2388.2	19.05	711	181.5	196.7	211.8	119017.2	1.12	6.15	
34-2287	OZ®	62.8	90.02	1	24	42.5	45.7	49	753.4	3.14	19.14	B3
		3375.2	2286.6	25.4	609	207.4	223.2	239	102877.5	0.96	5.84	
34-2591	OZ®	63.1	102.02	0.5	36	30.9	33.7	36.6	1135.1	4.71	22.29	B3
		3390.5	2591.4	12.7	914	150.8	164.7	178.7	155012.3	1.44	6.79	
34-2744	OZ®	63.5	108.02	0.394	42	27.5	30.2	32.9	1333.2	5.5	23.86	B3
		3413.1	2743.8	10	1066	134.5	147.7	160.8	182053.6	1.68	7.27	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
34-2439	OZ®	63.9	96.02	0.688	30	36	39.1	42.1	958.3	3.93	20.71	B3
		3434.7	2439	17.462	762	175.9	190.7	205.5	130861.7	1.2	6.31	
35-2541	OZ®	64.4	100.02	0.562	34	32.9	35.8	38.7	1094.8	4.45	21.76	B3
		3462.2	2540.6	14.288	863	160.4	174.7	188.9	149499.3	1.36	6.63	
35-2490	OZ®	64.6	98.02	0.625	31	34.6	37.6	40.5	1034.2	4.19	21.24	B3
		3475.2	2489.8	15.875	812	168.8	183.3	197.9	141230.1	1.28	6.47	
35-2642	OZ®	64.8	104.02	0.472	38	30.3	33.1	35.9	1231	4.97	22.81	B3
		3483.4	2642.2	12	965	147.8	161.5	175.1	168109.8	1.52	6.95	
35-2795	OZ®	64.9	110.02	0.375	43	27	29.7	32.3	1427.9	5.76	24.38	B3
		3489.5	2794.6	9.525	1117	131.9	144.8	157.8	194992.8	1.76	7.43	
35-2693	OZ®	65.1	106.02	0.438	40	29.2	31.9	34.7	1302.1	5.24	23.33	B3
		3500.3	2693	11.112	1016	142.5	155.9	169.3	177816.9	1.6	7.11	
36-2388	OZ®	66.4	94.02	0.812	28	39.4	42.5	45.6	929.4	3.67	20.19	B3
		3569.2	2388.2	20.638	711	192.5	207.7	222.8	126921.4	1.12	6.15	
36-2795	OZ®	67.8	110.02	0.394	43	28	30.6	33.3	1492.6	5.76	24.38	B3
		3647.6	2794.6	10	1117	136.5	149.5	162.4	203830.5	1.76	7.43	
37-2642	OZ®	68.1	104.02	0.5	38	31.5	34.3	37.1	1294.4	4.97	22.81	B3
		3662.8	2642.2	12.7	965	153.9	167.6	181.3	176764.7	1.52	6.95	
37-2439	OZ®	68.6	96.02	0.75	30	38.4	41.4	44.5	1029.7	3.93	20.71	B3
		3690.9	2439	19.05	762	187.5	202.4	217.2	140621.5	1.2	6.31	
37-2693	OZ®	69.7	106.02	0.472	40	30.8	33.6	36.3	1394.9	5.24	23.33	B3
		3749.7	2693	12	1016	150.6	164	177.4	190484.5	1.6	7.11	
38-2744	OZ®	69.8	108.02	0.438	42	29.7	32.4	35.1	1466.5	5.5	23.86	B3
		3754.4	2743.8	11.112	1066	144.9	158.1	171.3	200259.8	1.68	7.27	
38-2591	OZ®	69.9	102.02	0.562	36	33.6	36.5	39.3	1258.2	4.71	22.29	B3
		3758.2	2591.4	14.288	914	164.2	178.2	192.1	171824.4	1.44	6.79	
38-2490	OZ®	70.1	98.02	0.688	31	37.1	40.1	43	1121	4.19	21.24	B3
		3766.9	2489.8	17.462	812	181.1	195.6	210.1	153087.7	1.28	6.47	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)				
38-2388	OZ [®]	70.5	94.02	0.875	28	41.7	44.8	47.9	986.5	3.67	20.19	B3
		3788.4	2388.2	22.225	711	203.5	218.6	233.8	134714.3	1.12	6.15	
38-2541	OZ [®]	70.5	100.02	0.625	34	35.5	38.4	41.3	1198.8	4.45	21.76	B3
		3791.2	2540.6	15.875	863	173.3	187.5	201.7	163705	1.36	6.63	
39-2439	OZ [®]	73.4	96.02	0.812	30	40.8	43.8	46.9	1100.3	3.93	20.71	B3
		3943.7	2439	20.638	762	199.1	213.9	228.8	150254.1	1.2	6.31	
39-2693	OZ [®]	73.4	106.02	0.5	40	32.1	34.9	37.6	1467.7	5.24	23.33	B3
		3945.4	2693	12.7	1016	156.9	170.3	183.8	200427.7	1.6	7.11	
40-2896	OZ [®]	73.6	114.02	0.375	48	27.8	30.3	32.9	1765.2	6.28	25.43	B3
		3954.3	2896.2	9.525	1219	135.5	148	160.5	241054.4	1.92	7.75	
40-2388	OZ [®]	74.5	94.02	0.938	28	43.9	47	50.1	1042.7	3.67	20.19	B3
		4004.4	2388.2	23.812	711	214.4	229.5	244.7	142396.7	1.12	6.15	
40-2795	OZ [®]	74.7	110.02	0.438	43	30.2	32.8	35.5	1643.5	5.76	24.38	B3
		4016.4	2794.6	11.112	1117	147.3	160.2	173.1	224439.2	1.76	7.43	
40-2744	OZ [®]	74.9	108.02	0.472	42	31.4	34.1	36.8	1572.2	5.5	23.86	B3
		4025.1	2743.8	12	1066	153.3	166.4	179.6	214700.3	1.68	7.27	
41-2490	OZ [®]	75.4	98.02	0.75	31	39.6	42.6	45.5	1206.8	4.19	21.24	B3
		4055.1	2489.8	19.05	812	193.3	207.8	222.3	164800.7	1.28	6.47	
41-2642	OZ [®]	75.6	104.02	0.562	38	34.4	37.2	40	1437.1	4.97	22.81	B3
		4066.5	2642.2	14.288	965	167.8	181.5	195.2	196250.4	1.52	6.95	
41-2541	OZ [®]	76.6	100.02	0.688	34	38.1	41	43.9	1301.6	4.45	21.76	B3
		4116.5	2540.6	17.462	863	186.1	200.3	214.5	177748.9	1.36	6.63	
41-2591	OZ [®]	76.7	102.02	0.625	36	36.4	39.2	42.1	1380	4.71	22.29	B3
		4122	2591.4	15.875	914	177.6	191.5	205.4	188456.4	1.44	6.79	
41-2896	OZ [®]	76.9	114.02	0.394	48	28.8	31.3	33.9	1846.6	6.28	25.43	B3
		4136.7	2896.2	10	1219	140.4	152.9	165.3	252174.8	1.92	7.75	
42-2439	OZ [®]	78	96.02	0.875	30	43.2	46.2	49.2	1169.9	3.93	20.71	B3
		4193.2	2439	22.225	762	210.7	225.5	240.3	159760.1	1.2	6.31	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
42-2947	OZ®	78	116.02	0.375	50	28.1	30.6	33.1	1950.9	6.54	25.95	B3
		4195.4	2947	9.525	1270	137.2	149.5	161.8	266410.5	1.99	7.91	
42-2388	OZ®	78.4	94.02	1	28	46.1	49.2	52.3	1098.2	3.67	20.19	B3
		4217.4	2388.2	25.4	711	225.3	240.4	255.5	149969.3	1.12	6.15	
42-2744	OZ®	78.8	108.02	0.5	42	32.7	35.4	38.1	1655.2	5.5	23.86	B3
		4237.7	2743.8	12.7	1066	159.8	173	186.2	226038.3	1.68	7.27	
43-2795	OZ®	80.1	110.02	0.472	43	31.9	34.6	37.2	1763.3	5.76	24.38	B3
		4309.1	2794.6	12	1117	155.9	168.8	181.7	240790	1.76	7.43	
43-2490	OZ®	80.7	98.02	0.812	31	42.1	45.1	48	1291.5	4.19	21.24	B3
		4339.8	2489.8	20.638	812	205.5	220	234.5	176371.1	1.28	6.47	
44-2693	OZ®	81.6	106.02	0.562	40	35.1	37.8	40.6	1631.7	5.24	23.33	B3
		4386.3	2693	14.288	1016	171.3	184.7	198.1	222822.4	1.6	7.11	
44-2947	OZ®	81.7	116.02	0.394	50	29.1	31.6	34.1	2041.5	6.54	25.95	B3
		4390.3	2947	10	1270	142.2	154.5	166.7	278786.8	1.99	7.91	
44-2541	OZ®	82.5	100.02	0.75	34	40.7	43.6	46.5	1403.3	4.45	21.76	B3
		4438	2540.6	19.05	863	198.8	213	227.3	191632.2	1.36	6.63	
44-2439	OZ®	82.6	96.02	0.938	30	45.5	48.5	51.6	1238.6	3.93	20.71	B3
		4439.4	2439	23.812	762	222.2	237	251.8	169141	1.2	6.31	
44-2998	OZ®	82.6	118.02	0.375	52	28.4	30.9	33.4	2148.1	6.81	26.47	B3
		4441.9	2997.8	9.525	1320	138.9	151	163	293342.1	2.07	8.07	
45-2642	OZ®	83.1	104.02	0.625	38	37.2	40	42.8	1578.4	4.97	22.81	B3
		4466.2	2642.2	15.875	965	181.7	195.4	209	215538.9	1.52	6.95	
45-2591	OZ®	83.4	102.02	0.688	36	39.1	42	44.8	1500.5	4.71	22.29	B3
		4481.8	2591.4	17.462	914	190.9	204.8	218.8	204910	1.44	6.79	
45-2795	OZ®	84.4	110.02	0.5	43	33.3	36	38.6	1857.3	5.76	24.38	B3
		4538.8	2794.6	12.7	1117	162.6	175.5	188.5	253630.5	1.76	7.43	
46-2896	OZ®	84.9	114.02	0.438	48	31.1	33.6	36.2	2036.6	6.28	25.43	B3
		4562.3	2896.2	11.112	1219	151.7	164.2	176.7	278116.4	1.92	7.75	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
46-2490	OZ®	86	98.02	0.875	31	44.6	47.5	50.5	1375.2	4.19	21.24	B3
		4621	2489.8	22.225	812	217.6	232.1	246.6	187799.3	1.28	6.47	
46-2998	OZ®	86.5	118.02	0.394	52	29.5	32	34.4	2248.5	6.81	26.47	B3
		4649.5	2997.8	10	1320	144	156	168.1	307052.8	2.07	8.07	
47-2439	OZ®	87.1	96.02	1	30	47.8	50.9	53.9	1306.4	3.93	20.71	B3
		4682.3	2439	25.4	762	233.6	248.4	263.2	178397.2	1.2	6.31	
47-3049	OZ®	87.3	120.02	0.375	53	28.8	31.2	33.6	2357	7.07	27	B3
		4693.3	3048.6	9.525	1371	140.5	152.4	164.2	321867.3	2.15	8.23	
47-2744	OZ®	87.7	108.02	0.562	42	35.8	38.5	41.2	1842.3	5.5	23.86	B3
		4716.6	2743.8	14.288	1066	174.7	187.8	201	251582.4	1.68	7.27	
48-2541	OZ®	88.5	100.02	0.812	34	43.3	46.2	49.1	1503.8	4.45	21.76	B3
		4755.8	2540.6	20.638	863	211.5	225.7	240	205356.1	1.36	6.63	
48-2693	OZ®	89.7	106.02	0.625	40	38	40.8	43.5	1794.1	5.24	23.33	B3
		4822.9	2693	15.875	1016	185.6	199.1	212.5	245002.2	1.6	7.11	
48-2591	OZ®	90	102.02	0.75	36	41.8	44.7	47.5	1619.7	4.71	22.29	B3
		4837.8	2591.4	19.05	914	204.1	218.1	232	221186.2	1.44	6.79	
48-2947	OZ®	90.1	116.02	0.438	50	31.5	34	36.5	2253	6.54	25.95	B3
		4845.1	2947	11.112	1270	153.8	166.1	178.4	307663.7	1.99	7.91	
49-2642	OZ®	90.4	104.02	0.688	38	40	42.8	45.6	1718.2	4.97	22.81	B3
		4861.8	2642.2	17.462	965	195.5	209.2	222.8	234631.3	1.52	6.95	
49-2490	OZ®	91.1	98.02	0.938	31	47	50	53	1457.9	4.19	21.24	B3
		4898.8	2489.8	23.812	812	229.6	244.1	258.6	199086.6	1.28	6.47	
49-2896	OZ®	91.1	114.02	0.472	48	32.9	35.5	38	2187.4	6.28	25.43	B3
		4900.1	2896.2	12	1219	160.8	173.2	185.7	298707.9	1.92	7.75	
49-3049	OZ®	91.4	120.02	0.394	53	29.8	32.3	34.7	2467.7	7.07	27	B3
		4913.8	3048.6	10	1371	145.7	157.5	169.4	336991	2.15	8.23	
49-3099	OZ®	92.1	122.02	0.375	56	29.1	31.5	33.9	2577.7	7.33	27.52	B3
		4949.4	3099.4	9.525	1422	142	153.7	165.4	352003.5	2.23	8.39	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)				
51-2795	OZ [®]	94.1	110.02	0.562	43	36.4	39.1	41.7	2069.2	5.76	24.38	B3
		5056.7	2794.6	14.288	1117	177.9	190.8	203.7	282568.5	1.76	7.43	
51-2541	OZ [®]	94.3	100.02	0.875	34	45.9	48.8	51.7	1603.1	4.45	21.76	B3
		5070	2540.6	22.225	863	224.2	238.4	252.6	218922.2	1.36	6.63	
51-2998	OZ [®]	95.5	118.02	0.438	52	31.9	34.4	36.9	2482.8	6.81	26.47	B3
		5134	2997.8	11.112	1320	155.9	167.9	180	339047.2	2.07	8.07	
52-2896	OZ [®]	96.1	114.02	0.5	48	34.4	36.9	39.5	2305.9	6.28	25.43	B3
		5165.4	2896.2	12.7	1219	167.9	180.4	192.8	314884.6	1.92	7.75	
52-2490	OZ [®]	96.2	98.02	1	31	49.5	52.5	55.4	1539.5	4.19	21.24	B3
		5173.1	2489.8	25.4	812	241.6	256.1	270.6	210234.5	1.28	6.47	
52-3099	OZ [®]	96.4	122.02	0.394	56	30.2	32.6	35	2699.3	7.33	27.52	B3
		5183.1	3099.4	10	1422	147.3	159	170.7	368619.7	2.23	8.39	
52-2591	OZ [®]	96.5	102.02	0.812	36	44.5	47.4	50.2	1737.6	4.71	22.29	B3
		5190	2591.4	20.638	914	217.4	231.3	245.2	237286.7	1.44	6.79	
52-2744	OZ [®]	96.6	108.02	0.625	42	38.8	41.5	44.2	2027.6	5.5	23.86	B3
		5191.1	2743.8	15.875	1066	189.5	202.6	215.8	276892.9	1.68	7.27	
52-2947	OZ [®]	96.8	116.02	0.472	50	33.4	35.9	38.4	2420.9	6.54	25.95	B3
		5206.1	2947	12	1270	163.1	175.4	187.6	330590	1.99	7.91	
53-2642	OZ [®]	97.7	104.02	0.75	38	42.9	45.7	48.5	1856.6	4.97	22.81	B3
		5253.4	2642.2	19.05	965	209.2	222.9	236.6	253529.6	1.52	6.95	
53-2693	OZ [®]	97.7	106.02	0.688	40	40.9	43.7	46.4	1955	5.24	23.33	B3
		5255.3	2693	17.462	1016	199.9	213.3	226.8	266968	1.6	7.11	
54-2541	OZ [®]	100.1	100.02	0.938	34	48.5	51.4	54.3	1701.3	4.45	21.76	B3
		5380.5	2540.6	23.812	863	236.8	251	265.2	232331.3	1.36	6.63	
54-3049	OZ [®]	101	120.02	0.438	53	32.3	34.8	37.2	2726.2	7.07	27	B3
		5428.5	3048.6	11.112	1371	157.8	169.7	181.5	372288.9	2.15	8.23	
55-2947	OZ [®]	102.1	116.02	0.5	50	34.9	37.4	39.9	2552.8	6.54	25.95	B3
		5489.8	2947	12.7	1270	170.4	182.7	194.9	348603.6	1.99	7.91	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)				
55-2998	OZ [®]	102.6	118.02	0.472	52	33.9	36.3	38.8	2668.8	6.81	26.47	B3
		5518.7	2997.8	12	1320	165.4	177.4	189.5	364453.9	2.07	8.07	
55-2591	OZ [®]	103	102.02	0.875	36	47.2	50.1	52.9	1854.2	4.71	22.29	B3
		5538.3	2591.4	22.225	914	230.5	244.5	258.4	253212.5	1.44	6.79	
56-2795	OZ [®]	103.6	110.02	0.625	43	39.6	42.2	44.9	2279.3	5.76	24.38	B3
		5570	2794.6	15.875	1117	193.1	206.1	219	311254.1	1.76	7.43	
56-2642	OZ [®]	104.9	104.02	0.812	38	45.7	48.5	51.3	1993.5	4.97	22.81	B3
		5641	2642.2	20.638	965	223	236.6	250.3	272234.4	1.52	6.95	
57-2744	OZ [®]	105.3	108.02	0.688	42	41.8	44.5	47.2	2211.3	5.5	23.86	B3
		5661.3	2743.8	17.462	1066	204.2	217.4	230.5	301971.6	1.68	7.27	
57-2693	OZ [®]	105.7	106.02	0.75	40	43.9	46.6	49.4	2114.3	5.24	23.33	B3
		5683.5	2693	19.05	1016	214.2	227.6	241	288721.8	1.6	7.11	
57-2541	OZ [®]	105.8	100.02	1	34	51.1	54	56.9	1798.4	4.45	21.76	B3
		5687.5	2540.6	25.4	863	249.3	263.5	277.8	245584.8	1.36	6.63	
57-3099	OZ [®]	106.5	122.02	0.438	56	32.7	35.1	37.5	2983.4	7.33	27.52	B3
		5728.4	3099.4	11.112	1422	159.8	171.4	183.1	407404.6	2.23	8.39	
58-2896	OZ [®]	107.2	114.02	0.562	48	37.7	40.2	42.8	2573	6.28	25.43	B3
		5763.8	2896.2	14.288	1219	184	196.5	209	351360.7	1.92	7.75	
58-2998	OZ [®]	108.3	118.02	0.5	52	35.4	37.9	40.3	2815	6.81	26.47	B3
		5821	2997.8	12.7	1320	172.8	184.9	196.9	384418.5	2.07	8.07	
58-3049	OZ [®]	108.6	120.02	0.472	53	34.3	36.7	39.2	2931.5	7.07	27	B3
		5837.3	3048.6	12	1371	167.5	179.4	191.2	400321.4	2.15	8.23	
59-2591	OZ [®]	109.4	102.02	0.938	36	49.9	52.8	55.6	1969.6	4.71	22.29	B3
		5882.9	2591.4	23.812	914	243.6	257.6	271.5	268964.6	1.44	6.79	
60-2642	OZ [®]	112.1	104.02	0.875	38	48.5	51.3	54.1	2129.1	4.97	22.81	B3
		6024.6	2642.2	22.225	965	236.6	250.3	264	290747.4	1.52	6.95	
61-2795	OZ [®]	113.1	110.02	0.688	43	42.7	45.3	48	2487.5	5.76	24.38	B3
		6078.9	2794.6	17.462	1117	208.3	221.2	234.2	339689.7	1.76	7.43	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
		lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)					
61-2693	OZ [®]	113.6	106.02	0.812	40	46.8	49.5	52.3	2272	5.24	23.33	B3
		6107.6	2693	20.638	1016	228.4	241.8	255.2	310264.7	1.6	7.11	
61-2744	OZ [®]	114	108.02	0.75	42	44.8	47.5	50.2	2393.3	5.5	23.86	B3
		6127.1	2743.8	19.05	1066	218.9	232.1	245.2	326820	1.68	7.27	
61-2947	OZ [®]	114	116.02	0.562	50	38.3	40.8	43.3	2850.3	6.54	25.95	B3
		6129.6	2947	14.288	1270	186.9	199.2	211.4	389229.7	1.99	7.91	
62-3049	OZ [®]	114.5	120.02	0.5	53	35.9	38.3	40.7	3092.8	7.07	27	B3
		6158.6	3048.6	12.7	1371	175.2	187	198.9	422354.5	2.15	8.23	
62-3099	OZ [®]	114.6	122.02	0.472	56	34.7	37.1	39.5	3209	7.33	27.52	B3
		6161.6	3099.4	12	1422	169.6	181.3	192.9	438213.8	2.23	8.39	
62-2591	OZ [®]	115.8	102.02	1	36	52.6	55.4	58.3	2083.7	4.71	22.29	B3
		6223.6	2591.4	25.4	914	256.7	270.7	284.6	284544.9	1.44	6.79	
64-2896	OZ [®]	118.2	114.02	0.625	48	41	43.5	46.1	2837.9	6.28	25.43	B3
		6357.4	2896.2	15.875	1219	200.1	212.6	225	387545.7	1.92	7.75	
64-2642	OZ [®]	119.1	104.02	0.938	38	51.3	54.1	56.9	2263.3	4.97	22.81	B3
		6404.3	2642.2	23.812	965	250.2	263.9	277.6	309070	1.52	6.95	
65-3099	OZ [®]	120.9	122.02	0.5	56	36.3	38.7	41.1	3386.3	7.33	27.52	B3
		6502.1	3099.4	12.7	1422	177.4	189.1	200.7	462431.4	2.23	8.39	
65-2998	OZ [®]	121	118.02	0.562	52	38.9	41.3	43.8	3144.9	6.81	26.47	B3
		6503	2997.8	14.288	1320	189.7	201.8	213.8	429458.2	2.07	8.07	
65-2693	OZ [®]	121.4	106.02	0.875	40	49.7	52.4	55.2	2428.2	5.24	23.33	B3
		6527.5	2693	22.225	1016	242.5	255.9	269.3	331598.1	1.6	7.11	
66-2795	OZ [®]	122.4	110.02	0.75	43	45.8	48.4	51.1	2693.9	5.76	24.38	B3
		6583.3	2794.6	19.05	1117	223.5	236.4	249.3	367875.8	1.76	7.43	
66-2744	OZ [®]	122.5	108.02	0.812	42	47.8	50.5	53.2	2573.5	5.5	23.86	B3
		6588.7	2743.8	20.638	1066	233.6	246.7	259.9	351439.2	1.68	7.27	
68-2947	OZ [®]	125.8	116.02	0.625	50	41.7	44.2	46.7	3145.5	6.54	25.95	B3
		6764.5	2947	15.875	1270	203.4	215.6	227.9	429548.6	1.99	7.91	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)				
68-2642	OZ [®]	126.1	104.02	1	38	54	56.8	59.6	2396.1	4.97	22.81	B3
		6780	2642.2	25.4	965	263.8	277.5	291.2	327203.4	1.52	6.95	
69-3049	OZ [®]	128	120.02	0.562	53	39.4	41.8	44.3	3456.9	7.07	27	B3
		6883.4	3048.6	14.288	1371	192.4	204.3	216.1	472065.8	2.15	8.23	
69-2693	OZ [®]	129.1	106.02	0.938	40	52.6	55.3	58.1	2582.9	5.24	23.33	B3
		6943.4	2693	23.812	1016	256.6	270	283.4	352723.7	1.6	7.11	
69-2896	OZ [®]	129.2	114.02	0.688	48	44.3	46.8	49.4	3100.8	6.28	25.43	B3
		6946.2	2896.2	17.462	1219	216.1	228.6	241.1	423441	1.92	7.75	
70-2744	OZ [®]	131.1	108.02	0.875	42	50.8	53.5	56.2	2752.2	5.5	23.86	B3
		7045.9	2743.8	22.225	1066	248.2	261.3	274.5	375830.9	1.68	7.27	
71-2795	OZ [®]	131.7	110.02	0.812	43	48.9	51.5	54.2	2898.5	5.76	24.38	B3
		7083.3	2794.6	20.638	1117	238.6	251.5	264.4	395813.3	1.76	7.43	
72-2998	OZ [®]	133.5	118.02	0.625	52	42.3	44.8	47.2	3472.2	6.81	26.47	B3
		7180	2997.8	15.875	1320	206.6	218.6	230.7	474164.3	2.07	8.07	
72-3201	OZ [®]	134	126.02	0.5	60	37.2	39.5	41.8	4020.9	7.85	28.57	B3
		7206	3201	12.7	1524	181.7	193	204.3	549094	2.39	8.71	
73-3099	OZ [®]	135.2	122.02	0.562	56	39.9	42.3	44.7	3786.5	7.33	27.52	B3
		7270.5	3099.4	14.288	1422	195	206.7	218.4	517080.7	2.23	8.39	
74-2693	OZ [®]	136.8	106.02	1	40	55.4	58.2	60.9	2736.1	5.24	23.33	B3
		7355.2	2693	25.4	1016	270.7	284.1	297.5	373642.1	1.6	7.11	
74-2947	OZ [®]	137.5	116.02	0.688	50	45	47.5	50	3438.5	6.54	25.95	B3
		7394.6	2947	17.462	1270	219.8	232.1	244.3	469555.4	1.99	7.91	
75-2744	OZ [®]	139.5	108.02	0.938	42	53.8	56.5	59.2	2929.1	5.5	23.86	B3
		7499	2743.8	23.812	1066	262.7	275.9	289.1	399996.3	1.68	7.27	
75-2896	OZ [®]	140.1	114.02	0.75	48	47.5	50.1	52.6	3361.6	6.28	25.43	B3
		7530.3	2896.2	19.05	1219	232.1	244.6	257	459049.7	1.92	7.75	
76-2795	OZ [®]	141	110.02	0.875	43	51.9	54.6	57.2	3101.3	5.76	24.38	B3
		7578.8	2794.6	22.225	1117	253.6	266.5	279.5	423506	1.76	7.43	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
						60%	80%	100%				
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	
76-3049	OZ®	141.4	120.02	0.625	53	42.9	45.4	47.8	3818.3	7.07	27	B3
		7603.2	3048.6	15.875	1371	209.7	221.5	233.4	521426.2	2.15	8.23	
79-2998	OZ®	146	118.02	0.688	52	45.8	48.2	50.7	3797.2	6.81	26.47	B3
		7852	2997.8	17.462	1320	223.4	235.4	247.5	518543.5	2.07	8.07	
79-2744	OZ®	147.8	108.02	1	42	56.8	59.5	62.2	3104.4	5.5	23.86	B3
		7947.8	2743.8	25.4	1066	277.2	290.4	303.6	423937.3	1.68	7.27	
80-2947	OZ®	149.2	116.02	0.75	50	48.4	50.9	53.4	3729.2	6.54	25.95	B3
		8019.8	2947	19.05	1270	236.2	248.5	260.7	509256.8	1.99	7.91	
80-3099	OZ®	149.4	122.02	0.625	56	43.6	45.9	48.3	4184	7.33	27.52	B3
		8033.8	3099.4	15.875	1422	212.6	224.3	235.9	571362.1	2.23	8.39	
81-3201	OZ®	150	126.02	0.562	60	41	43.3	45.6	4499.4	7.85	28.57	B3
		8063.4	3201	14.288	1524	200	211.3	222.6	614429.8	2.39	8.71	
81-2795	OZ®	150.1	110.02	0.938	43	55	57.7	60.3	3302.3	5.76	24.38	B3
		8070.1	2794.6	23.812	1117	268.6	281.6	294.5	450955.3	1.76	7.43	
81-2896	OZ®	150.8	114.02	0.812	48	50.8	53.4	55.9	3620.2	6.28	25.43	B3
		8109.8	2896.2	20.638	1219	248	260.5	273	494371.9	1.92	7.75	
83-3049	OZ®	154.7	120.02	0.688	53	46.5	48.9	51.3	4177.2	7.07	27	B3
		8317.9	3048.6	17.462	1371	226.8	238.7	250.5	570438.8	2.15	8.23	
85-2998	OZ®	158.5	118.02	0.75	52	49.2	51.7	54.1	4119.8	6.81	26.47	B3
		8519	2997.8	19.05	1320	240.2	252.2	264.3	562595.8	2.07	8.07	
86-2795	OZ®	159.2	110.02	1	43	58.1	60.7	63.4	3501.5	5.76	24.38	B3
		8556.9	2794.6	25.4	1117	283.6	296.5	309.4	478157.8	1.76	7.43	
86-2947	OZ®	160.7	116.02	0.812	50	51.7	54.2	56.7	4017.7	6.54	25.95	B3
		8640.2	2947	20.638	1270	252.5	264.8	277.1	548652.8	1.99	7.91	
87-2896	OZ®	161.5	114.02	0.875	48	54.1	56.6	59.2	3876.8	6.28	25.43	B3
		8684.6	2896.2	22.225	1219	263.9	276.4	288.9	529410.9	1.92	7.75	
88-3099	OZ®	163.5	122.02	0.688	56	47.1	49.5	51.9	4578.8	7.33	27.52	B3
		8791.8	3099.4	17.462	1422	230.2	241.8	253.5	625269.3	2.23	8.39	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)				
89-3201	OZ®	165.8	126.02	0.625	60	44.7	47	49.3	4974.8	7.85	28.57	B3
		8915.4	3201	15.875	1524	218.3	229.6	240.9	679353.3	2.39	8.71	
90-3049	OZ®	167.9	120.02	0.75	53	50	52.4	54.8	4533.6	7.07	27	B3
		9027.4	3048.6	19.05	1371	244	255.8	267.7	619100.5	2.15	8.23	
92-2998	OZ®	170.8	118.02	0.812	52	52.6	55.1	57.6	4440	6.81	26.47	B3
		9181.1	2997.8	20.638	1320	256.9	268.9	281	606321.2	2.07	8.07	
93-2896	OZ®	172.1	114.02	0.938	48	57.3	59.9	62.4	4131.3	6.28	25.43	B3
		9254.7	2896.2	23.812	1219	279.8	292.3	304.8	564166.8	1.92	7.75	
93-2947	OZ®	172.2	116.02	0.875	50	55.1	57.6	60.1	4304	6.54	25.95	B3
		9255.8	2947	22.225	1270	268.8	281.1	293.4	587743.4	1.99	7.91	
95-3099	OZ®	177.5	122.02	0.75	56	50.7	53.1	55.5	4970.8	7.33	27.52	B3
		9544.6	3099.4	19.05	1422	247.7	259.3	271	678812	2.23	8.39	
97-3049	OZ®	181	120.02	0.812	53	53.5	55.9	58.3	4887.4	7.07	27	B3
		9732	3048.6	20.638	1371	261.1	272.9	284.8	667417.8	2.15	8.23	
98-3201	OZ®	181.6	126.02	0.688	60	48.4	50.8	53.1	5447.2	7.85	28.57	B3
		9762	3201	17.462	1524	236.5	247.8	259.1	743864.4	2.39	8.71	
98-2896	OZ®	182.7	114.02	1	48	60.5	63.1	65.7	4383.8	6.28	25.43	B3
		9820.2	2896.2	25.4	1219	295.6	308.1	320.6	598640.8	1.92	7.75	
98-2998	OZ®	183	118.02	0.875	52	56	58.5	61	4757.8	6.81	26.47	B3
		9838.3	2997.8	22.225	1320	273.6	285.6	297.7	649719.7	2.07	8.07	
99-2947	OZ®	183.5	116.02	0.938	50	58.4	60.9	63.4	4588	6.54	25.95	B3
		9866.6	2947	23.812	1270	285.1	297.4	309.6	626532	1.99	7.91	
103-3099	OZ®	191.4	122.02	0.812	56	54.3	56.7	59.1	5360.2	7.33	27.52	B3
		10292.2	3099.4	20.638	1422	265.2	276.8	288.5	731983.5	2.23	8.39	
104-3049	OZ®	194	120.02	0.875	53	57	59.4	61.8	5238.7	7.07	27	B3
		10431.5	3048.6	22.225	1371	278.2	290	301.9	715390.6	2.15	8.23	
105-2947	OZ®	194.8	116.02	1	50	61.7	64.2	66.7	4869.8	6.54	25.95	B3
		10472.7	2947	25.4	1270	301.3	313.6	325.8	665017.7	1.99	7.91	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ®.

Section	Solution Type	Section Modulus	Width	Thickness	Diameter	Weight at Ratio			Moment of Inertia	Surface Area	Coating Area	Configuration
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	60%	80%	100%				
						lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)				
105-2998	OZ [®]	195.1	118.02	0.938	52	59.4	61.9	64.4	5073.3	6.81	26.47	B3
		10490.6	2997.8	23.812	1320	290.2	302.3	314.3	692801.3	2.07	8.07	
106-3201	OZ [®]	197.2	126.02	0.75	60	52.2	54.5	56.8	5916.6	7.85	28.57	B3
		10603.2	3201	19.05	1524	254.7	266	277.3	807963.1	2.39	8.71	
110-3099	OZ [®]	205.2	122.02	0.875	56	57.9	60.3	62.7	5746.9	7.33	27.52	B3
		11034.7	3099.4	22.225	1422	282.6	294.2	305.9	784790.5	2.23	8.39	
111-3049	OZ [®]	206.9	120.02	0.938	53	60.5	62.9	65.3	5587.5	7.07	27	B3
		11126	3048.6	23.812	1371	295.2	307	318.9	763019	2.15	8.23	
111-2998	OZ [®]	207.2	118.02	1	52	62.8	65.3	67.8	5386.4	6.81	26.47	B3
		11138.1	2997.8	25.4	1320	306.8	318.9	330.9	735557.1	2.07	8.07	
114-3201	OZ [®]	212.8	126.02	0.812	60	55.9	58.2	60.5	6383	7.85	28.57	B3
		11439	3201	20.638	1524	272.9	284.2	295.5	871649.4	2.39	8.71	
118-3099	OZ [®]	219	122.02	0.938	56	61.4	63.8	66.2	6131	7.33	27.52	B3
		11772.2	3099.4	23.812	1422	300	311.6	323.3	837236.2	2.23	8.39	
118-3049	OZ [®]	219.8	120.02	1	53	63.9	66.4	68.8	5933.8	7.07	27	B3
		11815.5	3048.6	25.4	1371	312.2	324	335.9	810308.3	2.15	8.23	
123-3201	OZ [®]	228.2	126.02	0.875	60	59.6	61.9	64.2	6846.4	7.85	28.57	B3
		12269.5	3201	22.225	1524	291	302.3	313.6	934932.8	2.39	8.71	
125-3099	OZ [®]	232.6	122.02	1	56	65	67.4	69.8	6512.3	7.33	27.52	B3
		12504.5	3099.4	25.4	1422	317.3	329	340.6	889317.2	2.23	8.39	
131-3201	OZ [®]	243.6	126.02	0.938	60	63.3	65.6	67.9	7306.8	7.85	28.57	B3
		13094.6	3201	23.812	1524	309.1	320.4	331.7	997806.9	2.39	8.71	
139-3201	OZ [®]	258.8	126.02	1	60	67	69.3	71.6	7764.3	7.85	28.57	B3
		13914.4	3201	25.4	1524	327.1	338.4	349.7	1060278	2.39	8.71	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ[®].

Specifications

When using steel sheet pile, it is necessary to make allowances for deviations from theoretical exactness. The degree of precision obtainable in the production of sheet pile is limited by the basic character of the rolling processes and normal limitations of mill equipment. Care must be taken during installation to assure that each element is being set at the desired driving dimension.

- Dimensions typically shown are nominal.
- Actual thicknesses vary due to mill rolling practices; however, permitted variations for such dimensions are not addressed.
- Interlocks should be reasonably free-sliding when threaded.
- Terms, tolerance, dimensions, and delivery conditions are in accordance with EN 10248 and/or ASTM A6.
- Welding is in accordance with AWS D1.1.

	AMERICAN ASTM A 6		EUROPEAN EN 10248
Mass	5%	-2.5%	± 5%
Length	+ 5in.	-0 in.	± 200mm
Height			± 7mm
Thickness			± 0.5mm for ≤ 8.5mm ± 6% for > 8.5mm
Width Interlocked			± 3%
Straightness			0.2% of the length
Ends ou of Square			2% of the width

Available Steel Grades

AMERICAN			CANADIAN			EUROPEAN		
ASTM	YIELD STRENGTH		CSA G40.21	YIELD STRENGTH		EN 10248	YIELD STRENGTH	
	(ksi)	(MPa)		(ksi)	(MPa)		(ksi)	(MPa)
A 328	39	270	Grade 260 W	38	260	S 240 GP	35	240
A 572 Grade 42	42	290	Grade 300 W	44	300	S 270 GP	39	270
A 572 Grade 50	50	345	Grade 355 W	50	350	S 320 GP	46	320
A 572 Grade 55	55	380	Grade 400 W	58	400	S 355 GP	51	355
A 572 Grade 60	60	415				S 390 GP	57	390
A 572 Grade 65*	65	450				S 430 GP	62	430
A 588 Grade 50	50	345				S 450 GP*	65	450
API 5L x70	70	485						
ASTM A 690 MARINER®	50	345						

ENGINEERING DISCLAIMER

This publication contains information on the properties of hot-rolled sheet pile based on accepted engineering practices related to sheet pile products and projects. The use of the data contained herein must be supplemented with qualified professional judgment.

LEGAL DISCLAIMER

“The information, including technical and engineering data, figures, tables, designs, drawings, details, suggested procedures, and suggested specifications, presented in this publication are for general information only. While every effort has been made to ensure its accuracy, this information should not be used or relied upon for any specific application without independent competent professional examination and verification of its accuracy, suitability and applicability.

Anyone making use of the material does so at their own risk and assumes any and all liability resulting from such use. **SHEET PILE LLC DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES OF MERCHANTABILITY FITNESS FOR ANY GENERAL OR PARTICULAR PURPOSE OR FREEDOM FROM INFRINGEMENT OF ANY PATENT, TRADEMARK, OR COPYRIGHT IN REGARD TO INFORMATION OR PRODUCTS CONTAINED OR REFERRED TO HEREIN.** Nothing herein contained shall be construed as granting a license, express or implied, under any patents.

These brands and products are supplied exclusively by or through Sheet Pile LLC.



Toll free: 866.666.7453 | +1 512.243.1228 | info@sheet-pile.com | sheet-pile.com

© 2026 Sheet Pile LLC. All rights reserved.