




Pile BNS[®]

sheet-pile.com/oz-pile


PilePro[®] Sheet Pile Connectors




PZ 90




Colt




Cobra




PZ Tee



Joker




Bullhead



PZT-S

Sheet Pile LLC is the owner and assignee of US 7,390,145, related to these connectors.

Configuration A

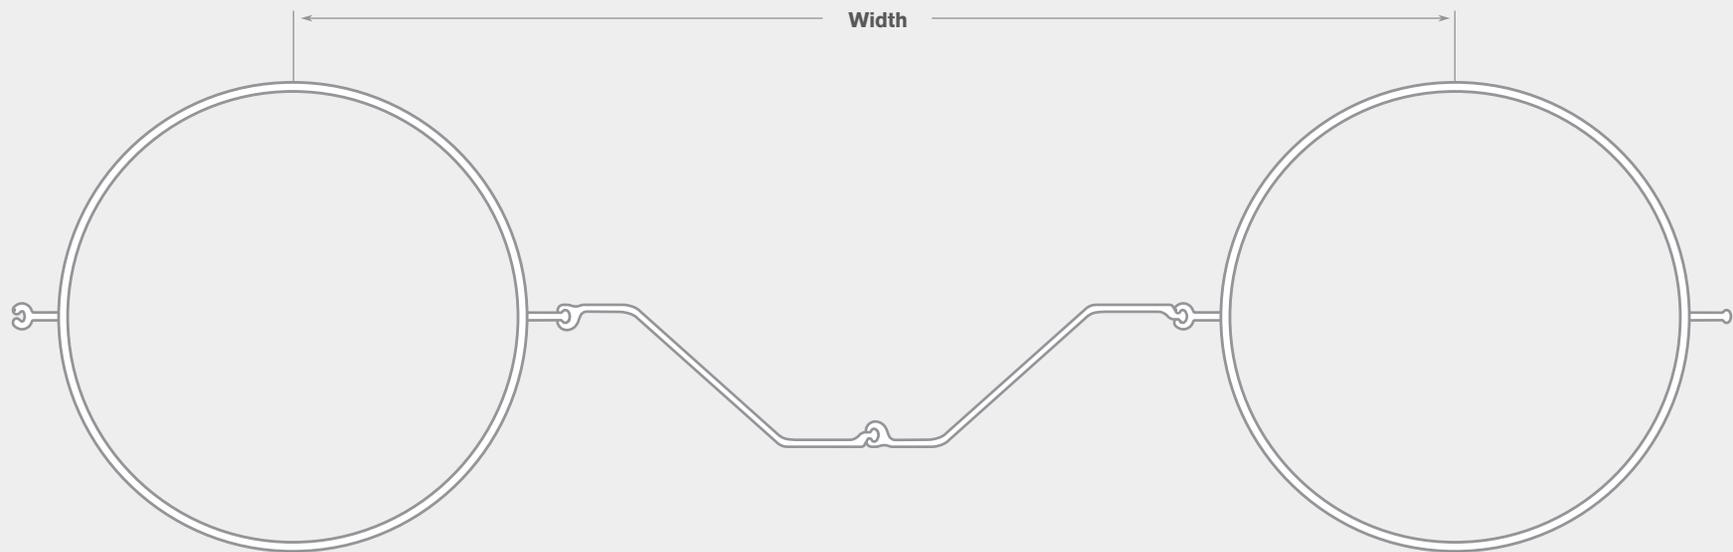

SECTION NAME:

73 - 2699



Section modulus (elastic) in cm³/m ÷ 100

These are examples from a large variety of possible OZ-Pile solutions.

Please configure your own system on sheet-pile.com/oz-pile

Sheet Pile LLC is the owner and assignee of numerous patents and IP, that may be related to this sheet pile solution.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in ³ /ft (cm ³ /m)	in (mm)	in (mm)		in (mm)	lb/ft ² (kg/m ²)	
27-2147	OZ	49.7	84.51	0.625	24	32.8	36.3	39.8	596.6	15.35	17.50	A2
		2672.8	2146.60	15.875	609	159.9	177.2	194.4	81467.9	4.68	5.34	
27-2496	OZ	49.8	98.28	0.472	31	28.5	31.6	34.6	796.3	16.39	19.60	A1
		2675.8	2496.20	12	812	139.4	154.2	169.0	108742.5	5.00	5.97	
27-2401	OZ	49.8	94.51	0.375	34	26.6	29.7	32.9	846.1	16.66	20.12	A2
		2675.8	2400.60	9.525	863	129.8	145.2	160.6	115541.9	5.08	6.13	
27-2248	OZ	49.9	88.51	0.5	28	30.0	33.4	36.8	698.1	15.87	18.55	A2
		2681.0	2248.20	12.7	711	146.6	163.1	179.5	95334.9	4.84	5.65	
27-2445	OZ	49.9	96.28	0.394	30	28.3	32.6	36.9	748.1	17.25	20.12	A3
		2681.2	2445.40	10	762	138.3	159.2	180.0	102154.2	5.26	6.13	
27-2445	OZ	50.0	96.28	0.528	30	30.0	33.1	36.2	749.3	16.13	19.07	A1
		2685.6	2445.40	13.4	762	146.5	161.6	176.7	102321.7	4.92	5.81	
27-2598	OZ	50.1	102.28	0.394	36	26.3	29.2	32.2	901.8	16.92	20.65	A1
		2693.6	2597.80	10	914	128.5	142.8	157.0	123151.1	5.16	6.29	
27-2293	OZ	50.3	90.28	0.5	24	30.4	34.9	39.5	603.2	16.46	18.55	A3
		2702.7	2293.00	12.7	609	148.2	170.4	192.6	82377.7	5.02	5.66	
27-2547	OZ	50.7	100.28	0.438	34	27.7	30.7	33.6	861.9	16.66	20.12	A1
		2725.9	2547.00	11.112	863	135.3	149.8	164.3	117704.0	5.08	6.13	
27-2293	OZ	50.7	90.28	0.787	24	35.9	39.2	42.5	608.5	15.35	17.50	A1
		2726.4	2293.00	20	609	175.2	191.3	207.4	83101.5	4.68	5.34	
27-2496	OZ	50.7	98.28	0.375	31	28.0	32.2	36.4	811.7	17.51	20.65	A3
		2727.4	2496.20	9.525	812	136.8	157.2	177.6	110840.5	5.34	6.29	
27-2395	OZ	50.8	94.28	0.438	28	29.5	33.8	38.2	711.2	16.99	19.60	A3
		2731.1	2394.60	11.112	711	143.9	165.2	186.5	97116.4	5.18	5.97	
28-2299	OZ	51.6	90.51	0.472	30	29.7	32.9	36.2	774.5	16.13	19.07	A2
		2776.1	2299.00	12	762	144.8	160.9	176.9	105769.9	4.92	5.81	
28-2401	OZ	51.8	94.51	0.394	34	27.4	30.6	33.7	880.3	16.66	20.12	A2
		2784.0	2400.60	10	863	133.9	149.3	164.7	120214.5	5.08	6.13	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
28-2649	OZ	51.8	104.28	0.375	38	25.9	28.8	31.7	984.0	17.18	21.17	A1
		2784.4	2648.60	9.525	965	126.6	140.6	154.5	134373.6	5.24	6.45	
28-2445	OZ	51.8	96.28	0.551	30	30.9	34.0	37.1	777.3	16.13	19.07	A1
		2785.9	2445.40	14	762	151.0	166.1	181.2	106141.3	4.92	5.81	
28-2293	OZ	51.9	90.28	0.812	24	36.7	40.0	43.3	623.3	15.35	17.50	A1
		2792.4	2293.00	20.638	609	179.1	195.2	211.3	85112.5	4.68	5.34	
28-2395	OZ	52.2	94.28	0.625	28	32.8	35.9	39.1	731.1	15.87	18.55	A1
		2807.6	2394.60	15.875	711	160.0	175.4	190.9	99838.4	4.84	5.65	
28-2496	OZ	52.2	98.28	0.5	31	29.7	32.7	35.7	835.8	16.39	19.60	A1
		2808.4	2496.20	12.7	812	144.8	159.6	174.4	114133.1	5.00	5.97	
28-2350	OZ	52.4	92.51	0.438	31	28.8	32.0	35.3	838.9	16.39	19.60	A2
		2819.0	2349.80	11.112	812	140.7	156.4	172.2	114562.9	5.00	5.97	
28-2496	OZ	52.4	98.28	0.394	31	28.8	33.0	37.1	839.0	17.51	20.65	A3
		2819.2	2496.20	10	812	140.5	161.0	181.4	114570.9	5.34	6.29	
28-2445	OZ	52.7	96.28	0.562	30	31.4	34.5	37.5	790.6	16.13	19.07	A1
		2833.7	2445.40	14.288	762	153.1	168.2	183.3	107964.8	4.92	5.81	
28-2445	OZ	52.7	96.28	0.429	30	29.7	34.0	38.2	791.1	17.25	20.12	A3
		2835.6	2445.40	10.9	762	145.1	165.9	186.7	108037.2	5.26	6.13	
28-2293	OZ	53.0	90.28	0.551	24	32.0	36.6	41.1	635.5	16.46	18.55	A3
		2847.3	2293.00	14	609	156.3	178.6	200.8	86787.2	5.02	5.66	
29-2147	OZ	53.1	84.51	0.688	24	34.9	38.4	42.0	637.3	15.35	17.50	A2
		2855.2	2146.60	17.462	609	170.5	187.7	204.9	87025.5	4.68	5.34	
29-2598	OZ	53.2	102.28	0.421	36	27.5	30.5	33.4	957.1	16.92	20.65	A1
		2858.8	2597.80	10.7	914	134.5	148.7	162.9	130704.4	5.16	6.29	
29-2395	OZ	53.3	94.28	0.472	28	30.8	35.1	39.5	745.9	16.99	19.60	A3
		2864.4	2394.60	12	711	150.2	171.5	192.8	101857.9	5.18	5.97	
29-2451	OZ	53.4	96.51	0.375	36	27.0	30.1	33.2	960.3	16.92	20.65	A2
		2868.3	2451.40	9.525	914	131.9	147.0	162.1	131139.3	5.16	6.29	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in ³ /ft (cm ³ /m)	in (mm)	in (mm)		in (mm)	lb/ft ² (kg/m ²)	
29-2547	OZ	53.4	100.28	0.375	34	28.4	32.5	36.6	908.1	17.77	21.17	A3
		2871.8	2547.00	9.525	863	138.8	158.8	178.8	124004.7	5.42	6.45	
29-2445	OZ	53.4	96.28	0.438	30	30.0	34.3	38.6	801.3	17.25	20.12	A3
		2871.9	2445.40	11.112	762	146.7	167.5	188.3	109420.1	5.26	6.13	
29-2293	OZ	53.6	90.28	0.562	24	32.4	36.9	41.5	642.6	16.46	18.55	A3
		2879.1	2293.00	14.288	609	158.1	180.4	202.6	87754.5	5.02	5.66	
29-2299	OZ	54.0	90.51	0.5	30	30.8	34.1	37.4	809.6	16.13	19.07	A2
		2901.9	2299.00	12.7	762	150.3	166.4	182.5	110562.0	4.92	5.81	
29-2649	OZ	54.1	104.28	0.394	38	26.8	29.7	32.5	1027.6	17.18	21.17	A1
		2907.8	2648.60	10	965	130.8	144.8	158.7	140329.6	5.24	6.45	
29-2547	OZ	54.2	100.28	0.472	34	29.2	32.2	35.1	921.4	16.66	20.12	A1
		2914.0	2547.00	12	863	142.5	157.0	171.5	125828.4	5.08	6.13	
29-2147	OZ	54.2	84.51	0.709	24	35.6	39.2	42.7	650.9	15.35	17.50	A2
		2916.2	2146.60	18	609	174.0	191.2	208.4	88886.4	4.68	5.34	
29-2344	OZ	54.4	92.28	0.75	26	36.0	39.3	42.5	707.5	15.61	18.03	A1
		2925.9	2343.80	19.05	660	175.9	191.6	207.4	96613.3	4.76	5.49	
29-2248	OZ	54.5	88.51	0.562	28	32.5	35.8	39.2	763.2	15.87	18.55	A2
		2930.7	2248.20	14.288	711	158.6	175.0	191.4	104217.2	4.84	5.65	
30-2293	OZ	55.0	90.28	0.875	24	38.7	42.0	45.3	659.5	15.35	17.50	A1
		2954.8	2293.00	22.225	609	188.8	204.9	221.0	90061.5	4.68	5.34	
30-2598	OZ	55.0	102.28	0.438	36	28.3	31.2	34.1	989.6	16.92	20.65	A1
		2955.8	2597.80	11.112	914	138.0	152.2	166.4	135139.0	5.16	6.29	
30-2395	OZ	55.2	94.28	0.5	28	31.8	36.1	40.5	773.1	16.99	19.60	A3
		2968.8	2394.60	12.7	711	155.2	176.5	197.7	105571.7	5.18	5.97	
30-2547	OZ	55.3	100.28	0.394	34	29.2	33.3	37.4	940.3	17.77	21.17	A3
		2973.8	2547.00	10	863	142.7	162.7	182.7	128408.7	5.42	6.45	
30-2451	OZ	55.6	96.51	0.394	36	27.9	31.0	34.1	1000.2	16.92	20.65	A2
		2987.6	2451.40	10	914	136.2	151.3	166.4	136592.2	5.16	6.29	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
30-2699	OZ	55.7	106.28	0.375	40	26.4	29.2	32.0	1114.4	17.44	21.69	A1
		2995.6	2699.40	9.525	1016	128.7	142.4	156.1	152175.7	5.32	6.61	
30-2350	OZ	55.8	92.51	0.472	31	30.3	33.5	36.8	892.4	16.39	19.60	A2
		2998.7	2349.80	12	812	148.0	163.8	179.5	121867.0	5.00	5.97	
30-2445	OZ	56.2	96.28	0.472	30	31.4	35.7	39.9	843.4	17.25	20.12	A3
		3022.8	2445.40	12	762	153.3	174.1	194.9	115169.3	5.26	6.13	
30-2299	OZ	56.3	90.51	0.528	30	31.9	35.2	38.5	844.5	16.13	19.07	A2
		3027.0	2299.00	13.4	762	155.8	171.9	188.0	115327.3	4.92	5.81	
30-2598	OZ	56.4	102.28	0.375	36	28.8	32.8	36.8	1014.6	18.03	21.70	A3
		3030.6	2597.80	9.525	914	140.7	160.3	179.9	138557.6	5.50	6.61	
30-2496	OZ	56.4	98.28	0.438	31	30.6	34.7	38.9	902.6	17.51	20.65	A3
		3032.9	2496.20	11.112	812	149.2	169.7	190.1	123255.3	5.34	6.29	
30-2147	OZ	56.4	84.51	0.75	24	37.1	40.6	44.1	677.3	15.35	17.50	A2
		3034.5	2146.60	19.05	609	180.9	198.1	215.3	92491.8	4.68	5.34	
30-2395	OZ	56.5	94.28	0.688	28	35.0	38.2	41.4	790.5	15.87	18.55	A1
		3035.6	2394.60	17.462	711	171.1	186.5	201.9	107947.5	4.84	5.65	
30-2401	OZ	56.5	94.51	0.438	34	29.4	32.5	35.7	960.0	16.66	20.12	A2
		3036.1	2400.60	11.112	863	143.5	158.9	174.3	131097.2	5.08	6.13	
30-2306	OZ	56.6	90.78	0.875	24	39.1	42.4	45.6	693.1	15.41	17.63	A1
		3042.0	2305.70	22.225	622	190.7	206.8	222.8	94651.7	4.70	5.38	
31-2293	OZ	56.8	90.28	0.625	24	34.4	39.0	43.5	681.3	16.46	18.55	A3
		3052.6	2293.00	15.875	609	168.0	190.2	212.5	93043.6	5.02	5.66	
31-2496	OZ	56.8	98.28	0.551	31	31.7	34.8	37.8	908.5	16.39	19.60	A1
		3052.8	2496.20	14	812	154.9	169.7	184.5	124067.8	5.00	5.97	
31-2547	OZ	56.9	100.28	0.5	34	30.3	33.3	36.3	968.1	16.66	20.12	A1
		3061.6	2547.00	12.7	863	148.2	162.7	177.2	132200.2	5.08	6.13	
31-2502	OZ	57.1	98.51	0.375	38	27.5	30.5	33.5	1085.2	17.18	21.17	A2
		3070.8	2502.20	9.525	965	134.0	148.8	163.6	148198.4	5.24	6.45	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
31-2445	OZ	57.6	96.28	0.625	30	33.8	36.8	39.9	863.8	16.13	19.07	A1
		3096.0	2445.40	15.875	762	164.8	179.9	195.0	117957.4	4.92	5.81	
31-2496	OZ	57.8	98.28	0.562	31	32.2	35.2	38.3	924.5	16.39	19.60	A1
		3106.6	2496.20	14.288	812	157.1	171.9	186.8	126251.5	5.00	5.97	
31-2293	OZ	57.9	90.28	0.938	24	40.6	43.9	47.2	695.1	15.35	17.50	A1
		3114.4	2293.00	23.812	609	198.4	214.5	230.6	94927.6	4.68	5.34	
31-2598	OZ	58.0	102.28	0.465	36	29.5	32.4	35.3	1043.5	16.92	20.65	A1
		3116.8	2597.80	11.8	914	143.8	158.0	172.3	142502.1	5.16	6.29	
31-2699	OZ	58.2	106.28	0.394	40	27.2	30.0	32.8	1164.4	17.44	21.69	A1
		3130.2	2699.40	10	1016	133.0	146.7	160.4	159013.1	5.32	6.61	
31-2299	OZ	58.3	90.51	0.551	30	32.9	36.2	39.5	874.3	16.13	19.07	A2
		3133.6	2299.00	14	762	160.6	176.6	192.7	119390.1	4.92	5.81	
31-2350	OZ	58.4	92.51	0.5	31	31.5	34.7	38.0	934.3	16.39	19.60	A2
		3139.6	2349.80	12.7	812	153.8	169.6	185.3	127593.4	5.00	5.97	
31-2147	OZ	58.4	84.51	0.787	24	38.3	41.9	45.4	700.9	15.35	17.50	A2
		3140.4	2146.60	20	609	187.1	204.4	221.6	95719.6	4.68	5.34	
31-2445	OZ	58.4	96.28	0.5	30	32.5	36.7	41.0	876.4	17.25	20.12	A3
		3141.1	2445.40	12.7	762	158.5	179.3	200.1	119674.5	5.26	6.13	
31-2598	OZ	58.5	102.28	0.394	36	29.6	33.7	37.7	1052.3	18.03	21.70	A3
		3143.1	2597.80	10	914	144.7	164.3	183.9	143703.1	5.50	6.61	
32-2451	OZ	58.8	96.51	0.421	36	29.2	32.3	35.4	1058.9	16.92	20.65	A2
		3162.7	2451.40	10.7	914	142.5	157.6	172.7	144596.6	5.16	6.29	
32-2598	OZ	58.8	102.28	0.472	36	29.8	32.7	35.6	1059.2	16.92	20.65	A1
		3163.6	2597.80	12	914	145.5	159.7	173.9	144637.8	5.16	6.29	
32-2248	OZ	59.1	88.51	0.625	28	34.9	38.3	41.6	827.3	15.87	18.55	A2
		3177.1	2248.20	15.875	711	170.4	186.9	203.3	112976.2	4.84	5.65	
32-2299	OZ	59.2	90.51	0.562	30	33.4	36.6	39.9	888.5	16.13	19.07	A2
		3184.5	2299.00	14.288	762	162.8	178.9	195.0	121329.7	4.92	5.81	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
32-2649	OZ	59.4	104.28	0.438	38	28.8	31.7	34.5	1129.3	17.18	21.17	A1
		3195.4	2648.60	11.112	965	140.6	154.5	168.5	154209.4	5.24	6.45	
32-2502	OZ	59.5	98.51	0.394	38	28.4	31.4	34.4	1131.4	17.18	21.17	A2
		3201.5	2502.20	10	965	138.5	153.2	168.0	154502.8	5.24	6.45	
32-2496	OZ	59.6	98.28	0.472	31	32.0	36.2	40.3	952.9	17.51	20.65	A3
		3202.0	2496.20	12	812	156.2	176.6	197.0	130131.0	5.34	6.29	
32-2649	OZ	59.6	104.28	0.375	38	29.2	33.1	37.1	1131.6	18.29	22.22	A3
		3202.1	2648.60	9.525	965	142.5	161.7	180.9	154531.5	5.58	6.77	
32-2395	OZ	59.6	94.28	0.562	28	34.1	38.4	42.8	834.2	16.99	19.60	A3
		3203.3	2394.60	14.288	711	166.4	187.7	208.9	113910.9	5.18	5.97	
32-2147	OZ	59.7	84.51	0.812	24	39.2	42.7	46.2	716.7	15.35	17.50	A2
		3210.9	2146.60	20.638	609	191.3	208.5	225.7	97867.8	4.68	5.34	
32-2547	OZ	59.7	100.28	0.438	34	31.1	35.2	39.3	1015.4	17.77	21.17	A3
		3211.3	2547.00	11.112	863	151.7	171.7	191.7	138665.9	5.42	6.45	
32-2750	OZ	59.8	108.28	0.375	42	26.8	29.5	32.3	1255.4	17.70	22.22	A1
		3214.1	2750.20	9.525	1066	130.6	144.1	157.5	171439.9	5.40	6.77	
32-2293	OZ	60.0	90.28	0.688	24	36.4	41.0	45.5	719.4	16.46	18.55	A3
		3223.3	2293.00	17.462	609	177.9	200.1	222.3	98246.4	5.02	5.66	
32-2401	OZ	60.2	94.51	0.472	34	31.0	34.1	37.3	1023.1	16.66	20.12	A2
		3235.7	2400.60	12	863	151.2	166.6	182.0	139717.2	5.08	6.13	
33-2445	OZ	60.6	96.28	0.528	30	33.5	37.8	42.1	909.2	17.25	20.12	A3
		3258.6	2445.40	13.4	762	163.7	184.5	205.3	124154.6	5.26	6.13	
33-2395	OZ	60.6	94.28	0.75	28	37.3	40.5	43.6	849.0	15.87	18.55	A1
		3260.5	2394.60	19.05	711	182.1	197.5	213.0	115943.0	4.84	5.65	
33-2451	OZ	60.7	96.51	0.438	36	29.9	33.0	36.1	1093.3	16.92	20.65	A2
		3265.4	2451.40	11.112	914	146.2	161.3	176.4	149295.9	5.16	6.29	
33-2293	OZ	60.8	90.28	1	24	42.6	45.9	49.2	730.2	15.35	17.50	A1
		3271.4	2293.00	25.4	609	208.0	224.1	240.2	99712.2	4.68	5.34	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
33-2293	OZ	61.0	90.28	0.709	24	37.1	41.7	46.2	732.2	16.46	18.55	A3
		3280.5	2293.00	18	609	181.2	203.4	225.6	99988.5	5.02	5.66	
33-2553	OZ	61.1	100.51	0.375	40	27.9	30.8	33.8	1221.1	17.44	21.69	A2
		3282.4	2553.00	9.525	1016	136.0	150.5	165.0	166746.2	5.32	6.61	
33-2598	OZ	61.5	102.28	0.421	36	30.9	34.9	38.9	1107.6	18.03	21.70	A3
		3308.3	2597.80	10.7	914	150.6	170.2	189.9	151256.4	5.50	6.61	
33-2649	OZ	61.9	104.28	0.394	38	30.0	34.0	37.9	1175.2	18.29	22.22	A3
		3325.5	2648.60	10	965	146.6	165.9	185.1	160487.4	5.58	6.77	
33-2197	OZ	61.9	86.51	0.75	26	38.4	41.9	45.3	804.3	15.61	18.03	A2
		3326.5	2197.40	19.05	660	187.6	204.4	221.2	109839.9	4.76	5.49	
33-2598	OZ	61.9	102.28	0.5	36	31.0	33.9	36.8	1113.7	16.92	20.65	A1
		3326.5	2597.80	12.7	914	151.4	165.6	179.9	152089.8	5.16	6.29	
33-2547	OZ	62.0	100.28	0.551	34	32.5	35.5	38.5	1054.1	16.66	20.12	A1
		3333.7	2547.00	14	863	158.7	173.2	187.7	143948.9	5.08	6.13	
33-2496	OZ	62.0	98.28	0.5	31	33.1	37.3	41.5	992.4	17.51	20.65	A3
		3334.7	2496.20	12.7	812	161.6	182.0	202.4	135521.6	5.34	6.29	
34-2445	OZ	62.4	96.28	0.688	30	36.1	39.2	42.3	936.0	16.13	19.07	A1
		3354.9	2445.40	17.462	762	176.5	191.6	206.7	127820.4	4.92	5.81	
34-2445	OZ	62.5	96.28	0.551	30	34.4	38.7	43.0	937.1	17.25	20.12	A3
		3358.9	2445.40	14	762	168.1	188.9	209.8	127974.1	5.26	6.13	
34-2750	OZ	62.5	108.28	0.394	42	27.7	30.4	33.2	1312.5	17.70	22.22	A1
		3360.1	2750.20	10	1066	135.1	148.5	162.0	179230.2	5.40	6.77	
34-2147	OZ	62.9	84.51	0.875	24	41.3	44.8	48.4	755.4	15.35	17.50	A2
		3384.3	2146.60	22.225	609	201.6	218.9	236.1	103154.3	4.68	5.34	
34-2699	OZ	63.0	106.28	0.375	40	29.5	33.4	37.3	1259.2	18.56	22.74	A3
		3384.9	2699.40	9.525	1016	144.2	163.1	182.0	171954.1	5.66	6.93	
34-2293	OZ	63.1	90.28	0.75	24	38.4	43.0	47.5	756.9	16.46	18.55	A3
		3391.2	2293.00	19.05	609	187.7	209.9	232.1	103363.7	5.02	5.66	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
34-2401	OZ	63.1	94.51	0.5	34	32.2	35.4	38.5	1072.6	16.66	20.12	A2
		3392.3	2400.60	12.7	863	157.2	172.6	188.0	146477.5	5.08	6.13	
34-2547	OZ	63.1	100.28	0.562	34	33.0	36.0	38.9	1073.0	16.66	20.12	A1
		3393.5	2547.00	14.288	863	161.0	175.5	190.1	146532.4	5.08	6.13	
34-2350	OZ	63.2	92.51	0.551	31	33.7	36.9	40.1	1011.6	16.39	19.60	A2
		3399.3	2349.80	14	812	164.6	180.3	196.0	138147.1	5.00	5.97	
34-2547	OZ	63.2	100.28	0.472	34	32.6	36.7	40.8	1074.9	17.77	21.17	A3
		3399.5	2547.00	12	863	159.0	179.0	199.0	146790.3	5.42	6.45	
34-2496	OZ	63.3	98.28	0.625	31	34.7	37.7	40.8	1012.2	16.39	19.60	A1
		3401.2	2496.20	15.875	812	169.4	184.2	199.0	138224.1	5.00	5.97	
34-2598	OZ	63.3	102.28	0.438	36	31.6	35.6	39.6	1140.1	18.03	21.70	A3
		3405.3	2597.80	11.112	914	154.1	173.7	193.3	155691.0	5.50	6.61	
34-2445	OZ	63.4	96.28	0.562	30	34.9	39.1	43.4	950.5	17.25	20.12	A3
		3406.8	2445.40	14.288	762	170.2	191.1	211.9	129797.6	5.26	6.13	
34-2248	OZ	63.6	88.51	0.688	28	37.3	40.7	44.1	890.6	15.87	18.55	A2
		3419.9	2248.20	17.462	711	182.2	198.7	215.1	121613.3	4.84	5.65	
34-2649	OZ	63.7	104.28	0.472	38	30.4	33.2	36.1	1209.8	17.18	21.17	A1
		3423.4	2648.60	12	965	148.4	162.3	176.3	165211.8	5.24	6.45	
34-2553	OZ	63.7	100.51	0.394	40	28.8	31.8	34.7	1274.0	17.44	21.69	A2
		3424.7	2553.00	10	1016	140.6	155.1	169.6	173975.7	5.32	6.61	
34-2395	OZ	63.9	94.28	0.625	28	36.4	40.7	45.1	894.4	16.99	19.60	A3
		3434.6	2394.60	15.875	711	177.5	198.8	220.1	122134.4	5.18	5.97	
34-2451	OZ	63.9	96.51	0.465	36	31.2	34.3	37.4	1150.4	16.92	20.65	A2
		3436.1	2451.40	11.8	914	152.4	167.5	182.5	157098.8	5.16	6.29	
34-2801	OZ	64.0	110.28	0.375	43	27.1	29.8	32.5	1407.4	17.96	22.74	A1
		3439.4	2801.00	9.525	1117	132.5	145.7	158.9	192191.0	5.48	6.93	
34-2445	OZ	64.0	96.28	0.709	30	36.9	40.0	43.1	960.2	16.13	19.07	A1
		3441.7	2445.40	18	762	180.4	195.5	210.6	131130.5	4.92	5.81	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
34-2699	OZ	64.1	106.28	0.438	40	29.3	32.1	34.9	1281.1	17.44	21.69	A1
		3443.9	2699.40	11.112	1016	143.1	156.8	170.5	174950.4	5.32	6.61	
35-2350	OZ	64.3	92.51	0.562	31	34.2	37.4	40.6	1028.6	16.39	19.60	A2
		3456.4	2349.80	14.288	812	166.9	182.7	198.4	140466.8	5.00	5.97	
35-2299	OZ	64.4	90.51	0.625	30	35.9	39.2	42.5	966.3	16.13	19.07	A2
		3463.5	2299.00	15.875	762	175.3	191.4	207.5	131958.7	4.92	5.81	
35-2159	OZ	64.5	85.01	0.875	24	41.7	45.2	48.7	790.7	15.41	17.63	A2
		3470.3	2159.30	22.225	622	203.7	220.8	237.9	107978.8	4.70	5.38	
35-2395	OZ	64.8	94.28	0.812	28	39.5	42.7	45.9	906.8	15.87	18.55	A1
		3482.2	2394.60	20.638	711	193.1	208.5	224.0	123826.1	4.84	5.65	
35-2451	OZ	64.8	96.51	0.472	36	31.6	34.7	37.8	1167.0	16.92	20.65	A2
		3485.6	2451.40	12	914	154.2	169.3	184.3	159362.0	5.16	6.29	
35-2293	OZ	64.9	90.28	0.787	24	39.6	44.2	48.7	779.0	16.46	18.55	A3
		3490.3	2293.00	20	609	193.5	215.7	237.9	106385.4	5.02	5.66	
35-2604	OZ	65.1	102.51	0.375	42	28.3	31.2	34.1	1368.0	17.70	22.22	A2
		3502.2	2603.80	9.525	1066	138.0	152.2	166.4	186809.3	5.40	6.77	
35-2502	OZ	65.2	98.51	0.438	38	30.5	33.5	36.5	1239.0	17.18	21.17	A2
		3505.9	2502.20	11.112	965	148.8	163.6	178.4	169194.7	5.24	6.45	
35-2699	OZ	65.5	106.28	0.394	40	30.4	34.3	38.2	1309.3	18.56	22.74	A3
		3519.5	2699.40	10	1016	148.5	167.4	186.3	178791.6	5.66	6.93	
35-2547	OZ	66.0	100.28	0.5	34	33.7	37.8	41.9	1121.6	17.77	21.17	A3
		3547.1	2547.00	12.7	863	164.6	184.6	204.6	153162.2	5.42	6.45	
36-2147	OZ	66.1	84.51	0.938	24	43.4	46.9	50.5	793.4	15.35	17.50	A2
		3554.9	2146.60	23.812	609	211.9	229.1	246.4	108352.3	4.68	5.34	
36-2293	OZ	66.1	90.28	0.812	24	40.4	45.0	49.5	793.8	16.46	18.55	A3
		3556.3	2293.00	20.638	609	197.4	219.6	241.8	108396.4	5.02	5.66	
36-2598	OZ	66.3	102.28	0.465	36	32.8	36.8	40.8	1194.0	18.03	21.70	A3
		3566.4	2597.80	11.8	914	159.9	179.6	199.2	163054.1	5.50	6.61	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
36-2750	OZ	66.6	108.28	0.375	42	29.9	33.7	37.5	1397.6	18.82	23.27	A3
		3578.0	2750.20	9.525	1066	145.9	164.4	182.9	190853.0	5.74	7.09	
36-2496	OZ	66.6	98.28	0.551	31	35.2	39.4	43.5	1065.2	17.51	20.65	A3
		3579.1	2496.20	14	812	171.7	192.1	212.5	145456.3	5.34	6.29	
36-2801	OZ	66.9	110.28	0.394	43	28.1	30.8	33.5	1472.0	17.96	22.74	A1
		3597.1	2801.00	10	1117	137.1	150.3	163.5	201008.6	5.48	6.93	
36-2649	OZ	67.0	104.28	0.5	38	31.6	34.5	37.4	1273.0	17.18	21.17	A1
		3602.3	2648.60	12.7	965	154.5	168.5	182.4	173845.8	5.24	6.45	
36-2445	OZ	67.2	96.28	0.75	30	38.5	41.6	44.7	1007.3	16.13	19.07	A1
		3610.4	2445.40	19.05	762	188.1	203.2	218.3	137554.6	4.92	5.81	
36-2598	OZ	67.2	102.28	0.472	36	33.1	37.1	41.1	1209.7	18.03	21.70	A3
		3613.1	2597.80	12	914	161.6	181.2	200.9	165189.8	5.50	6.61	
36-2649	OZ	67.2	104.28	0.438	38	32.0	36.0	39.9	1276.9	18.29	22.22	A3
		3613.1	2648.60	11.112	965	156.4	175.7	194.9	174367.2	5.58	6.77	
36-2344	OZ	67.3	92.28	0.75	26	39.7	44.1	48.6	874.3	16.72	19.08	A3
		3615.8	2343.80	19.05	660	193.8	215.5	237.2	119392.5	5.10	5.81	
36-2598	OZ	67.5	102.28	0.551	36	33.3	36.2	39.1	1214.4	16.92	20.65	A1
		3627.2	2597.80	14	914	162.4	176.6	190.8	165836.6	5.16	6.29	
36-2496	OZ	67.6	98.28	0.562	31	35.6	39.8	44.0	1081.1	17.51	20.65	A3
		3632.9	2496.20	14.288	812	173.9	194.4	214.8	147640.0	5.34	6.29	
37-2604	OZ	68.0	102.51	0.394	42	29.2	32.1	35.0	1428.2	17.70	22.22	A2
		3656.5	2603.80	10	1066	142.7	156.9	171.1	195037.6	5.40	6.77	
37-2451	OZ	68.0	96.51	0.5	36	32.9	35.9	39.0	1224.8	16.92	20.65	A2
		3658.3	2451.40	12.7	914	160.4	175.5	190.6	167259.1	5.16	6.29	
37-2248	OZ	68.1	88.51	0.75	28	39.7	43.1	46.5	952.9	15.87	18.55	A2
		3659.4	2248.20	19.05	711	194.0	210.4	226.8	130129.4	4.84	5.65	
37-2395	OZ	68.1	94.28	0.688	28	38.6	43.0	47.3	953.8	16.99	19.60	A3
		3662.6	2394.60	17.462	711	188.6	209.9	231.1	130243.5	5.18	5.97	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	
37-2445	OZ	68.2	96.28	0.625	30	37.3	41.5	45.8	1023.7	17.25	20.12	A3
		3669.0	2445.40	15.875	762	182.0	202.8	223.6	139790.2	5.26	6.13	
37-2401	OZ	68.5	94.51	0.551	34	34.5	37.6	40.8	1163.9	16.66	20.12	A2
		3680.9	2400.60	14	863	168.4	183.8	199.2	158942.8	5.08	6.13	
37-2496	OZ	68.7	98.28	0.688	31	37.2	40.2	43.3	1098.8	16.39	19.60	A1
		3692.2	2496.20	17.462	812	181.6	196.4	211.3	150051.3	5.00	5.97	
37-2699	OZ	68.7	106.28	0.472	40	31.0	33.8	36.6	1373.7	17.44	21.69	A1
		3692.7	2699.40	12	1016	151.2	164.8	178.5	187588.0	5.32	6.61	
37-2598	OZ	68.7	102.28	0.562	36	33.7	36.7	39.6	1236.5	16.92	20.65	A1
		3693.4	2597.80	14.288	914	164.8	179.0	193.2	168860.6	5.16	6.29	
37-2750	OZ	68.8	108.28	0.438	42	29.8	32.6	35.3	1445.5	17.70	22.22	A1
		3700.7	2750.20	11.112	1066	145.5	159.0	172.4	197394.0	5.40	6.77	
37-2395	OZ	68.8	94.28	0.875	28	41.8	44.9	48.1	963.7	15.87	18.55	A1
		3700.7	2394.60	22.225	711	204.0	219.4	234.9	131598.2	4.84	5.65	
37-2293	OZ	69.2	90.28	0.875	24	42.4	47.0	51.5	830.0	16.46	18.55	A3
		3718.7	2293.00	22.225	609	207.1	229.3	251.5	113345.4	5.02	5.66	
37-2547	OZ	69.2	100.28	0.625	34	35.6	38.6	41.6	1176.8	16.66	20.12	A1
		3721.7	2547.00	15.875	863	173.8	188.4	202.9	160702.4	5.08	6.13	
37-2147	OZ	69.2	84.51	1	24	45.5	49.0	52.6	830.9	15.35	17.50	A2
		3722.5	2146.60	25.4	609	222.1	239.4	256.6	113463.2	4.68	5.34	
37-2750	OZ	69.3	108.28	0.394	42	30.8	34.6	38.4	1454.6	18.82	23.27	A3
		3724.1	2750.20	10	1066	150.3	168.9	187.4	198643.4	5.74	7.09	
37-2655	OZ	69.4	104.51	0.375	43	28.6	31.5	34.3	1526.2	17.96	22.74	A2
		3729.6	2654.60	9.525	1117	139.8	153.8	167.7	208410.7	5.48	6.93	
37-2299	OZ	69.5	90.51	0.688	30	38.4	41.7	45.0	1043.1	16.13	19.07	A2
		3738.8	2299.00	17.462	762	187.7	203.8	219.9	142449.8	4.92	5.81	
37-2401	OZ	69.6	94.51	0.562	34	35.0	38.1	41.3	1184.0	16.66	20.12	A2
		3744.4	2400.60	14.288	863	170.9	186.3	201.7	161683.7	5.08	6.13	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	
37-2502	OZ	69.7	98.51	0.472	38	32.2	35.2	38.2	1324.3	17.18	21.17	A2
		3747.2	2502.20	12	965	157.1	171.8	186.6	180840.9	5.24	6.45	
38-2553	OZ	69.9	100.51	0.438	40	31.0	34.0	36.9	1397.4	17.44	21.69	A2
		3756.4	2553.00	11.112	1016	151.3	165.8	180.3	190826.9	5.32	6.61	
38-2445	OZ	70.0	96.28	0.787	30	39.9	43.0	46.1	1049.5	16.13	19.07	A1
		3761.7	2445.40	20	762	195.0	210.1	225.2	143319.2	4.92	5.81	
38-2350	OZ	70.1	92.51	0.625	31	36.9	40.1	43.3	1121.8	16.39	19.60	A2
		3769.3	2349.80	15.875	812	180.0	195.7	211.4	153185.4	5.00	5.97	
38-2598	OZ	70.2	102.28	0.5	36	34.3	38.3	42.4	1264.2	18.03	21.70	A3
		3776.1	2597.80	12.7	914	167.5	187.2	206.8	172641.9	5.50	6.61	
38-2801	OZ	70.3	110.28	0.375	43	30.2	33.9	37.7	1547.0	19.08	23.79	A3
		3780.5	2801.00	9.525	1117	147.5	165.7	183.9	211252.1	5.82	7.25	
38-2306	OZ	70.4	90.78	0.875	24	42.8	47.3	51.8	862.7	16.53	18.68	A3
		3786.2	2305.70	22.225	622	208.9	231.0	253.1	117807.4	5.04	5.70	
38-2496	OZ	70.5	98.28	0.709	31	38.0	41.1	44.1	1127.9	16.39	19.60	A1
		3789.9	2496.20	18	812	185.8	200.6	215.4	154022.9	5.00	5.97	
38-2547	OZ	71.0	100.28	0.551	34	35.9	40.0	44.1	1207.6	17.77	21.17	A3
		3819.1	2547.00	14	863	175.2	195.2	215.2	164910.9	5.42	6.45	
38-2299	OZ	71.3	90.51	0.709	30	39.3	42.6	45.9	1068.9	16.13	19.07	A2
		3831.2	2299.00	18	762	191.9	208.0	224.1	145970.6	4.92	5.81	
38-2699	OZ	71.3	106.28	0.438	40	32.5	36.4	40.2	1426.0	18.56	22.74	A3
		3833.2	2699.40	11.112	1016	158.6	177.5	196.4	194728.8	5.66	6.93	
38-2649	OZ	71.4	104.28	0.472	38	33.6	37.6	41.5	1357.4	18.29	22.22	A3
		3841.1	2648.60	12	965	164.2	183.4	202.7	185369.6	5.58	6.77	
39-2445	OZ	71.8	96.28	0.812	30	40.9	44.0	47.1	1077.6	16.13	19.07	A1
		3862.5	2445.40	20.638	762	199.6	214.8	229.9	147162.0	4.92	5.81	
39-2293	OZ	72.1	90.28	0.938	24	44.4	48.9	53.5	865.6	16.46	18.55	A3
		3878.3	2293.00	23.812	609	216.7	238.9	261.1	118211.5	5.02	5.66	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
39-2547	OZ	72.1	100.28	0.562	34	36.4	40.5	44.5	1226.5	17.77	21.17	A3
		3879.0	2547.00	14.288	863	177.5	197.5	217.5	167494.3	5.42	6.45	
39-2395	OZ	72.3	94.28	0.75	28	40.9	45.2	49.6	1012.3	16.99	19.60	A3
		3887.5	2394.60	19.05	711	199.6	220.9	242.2	138239.0	5.18	5.97	
39-2699	OZ	72.3	106.28	0.5	40	32.3	35.1	37.9	1446.3	17.44	21.69	A1
		3887.9	2699.40	12.7	1016	157.5	171.2	184.9	197507.6	5.32	6.61	
39-2248	OZ	72.5	88.51	0.812	28	42.1	45.5	48.9	1014.4	15.87	18.55	A2
		3895.6	2248.20	20.638	711	205.7	222.1	238.5	138525.9	4.84	5.65	
39-2655	OZ	72.5	104.51	0.394	43	29.6	32.5	35.3	1594.3	17.96	22.74	A2
		3896.1	2654.60	10	1117	144.7	158.6	172.5	217714.5	5.48	6.93	
39-2903	OZ	72.7	114.28	0.375	48	27.9	30.5	33.1	1744.7	18.49	23.79	A1
		3908.3	2902.60	9.525	1219	136.1	148.8	161.6	238249.2	5.64	7.25	
39-2395	OZ	72.8	94.28	0.938	28	44.0	47.2	50.3	1019.8	15.87	18.55	A1
		3916.2	2394.60	23.812	711	214.9	230.3	245.8	139260.0	4.84	5.65	
39-2496	OZ	73.1	98.28	0.625	31	38.1	42.3	46.5	1168.8	17.51	20.65	A3
		3927.5	2496.20	15.875	812	186.2	206.6	227.0	159612.6	5.34	6.29	
39-2445	OZ	73.1	96.28	0.688	30	39.7	43.9	48.2	1095.9	17.25	20.12	A3
		3927.9	2445.40	17.462	762	193.6	214.5	235.3	149653.2	5.26	6.13	
39-2649	OZ	73.1	104.28	0.551	38	34.0	36.8	39.7	1389.7	17.18	21.17	A1
		3932.4	2648.60	14	965	165.9	179.8	193.8	189778.6	5.24	6.45	
39-2502	OZ	73.2	98.51	0.5	38	33.5	36.5	39.5	1391.2	17.18	21.17	A2
		3936.6	2502.20	12.7	965	163.5	178.3	193.1	189980.0	5.24	6.45	
39-2801	OZ	73.3	110.28	0.394	43	31.1	34.9	38.6	1611.5	19.08	23.79	A3
		3938.3	2801.00	10	1117	152.1	170.3	188.5	220069.6	5.82	7.25	
40-2801	OZ	73.8	110.28	0.438	43	30.3	33.0	35.7	1622.5	17.96	22.74	A1
		3965.1	2801.00	11.112	1117	147.9	161.0	174.2	221570.2	5.48	6.93	
40-2750	OZ	73.9	108.28	0.472	42	31.5	34.3	37.0	1551.0	17.70	22.22	A1
		3970.8	2750.20	12	1066	153.8	167.3	180.7	211801.0	5.40	6.77	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
40-2451	OZ	74.0	96.51	0.551	36	35.2	38.3	41.4	1331.5	16.92	20.65	A2
		3977.0	2451.40	14	914	172.1	187.1	202.2	181826.8	5.16	6.29	
40-2496	OZ	74.0	98.28	0.75	31	39.7	42.7	45.8	1184.4	16.39	19.60	A1
		3979.7	2496.20	19.05	812	193.8	208.6	223.4	161734.2	5.00	5.97	
40-2649	OZ	74.5	104.28	0.562	38	34.5	37.3	40.2	1415.4	17.18	21.17	A1
		4005.1	2648.60	14.288	965	168.4	182.3	196.3	193284.4	5.24	6.45	
40-2299	OZ	74.6	90.51	0.75	30	41.0	44.3	47.6	1119.0	16.13	19.07	A2
		4010.6	2299.00	19.05	762	200.1	216.1	232.2	152803.8	4.92	5.81	
40-2445	OZ	74.7	96.28	0.709	30	40.5	44.7	49.0	1120.1	17.25	20.12	A3
		4014.8	2445.40	18	762	197.6	218.4	239.2	152963.3	5.26	6.13	
40-2604	OZ	74.7	102.51	0.438	42	31.5	34.4	37.3	1568.7	17.70	22.22	A2
		4016.2	2603.80	11.112	1066	153.7	167.9	182.1	214222.7	5.40	6.77	
40-2598	OZ	74.7	102.28	0.618	36	36.2	39.1	42.0	1344.7	16.92	20.65	A1
		4016.4	2597.80	15.7	914	176.6	190.9	205.1	183631.4	5.16	6.29	
40-2553	OZ	74.8	100.51	0.472	40	32.7	35.7	38.7	1495.2	17.44	21.69	A2
		4019.5	2553.00	12	1016	159.8	174.3	188.8	204189.2	5.32	6.61	
40-2649	OZ	74.8	104.28	0.5	38	34.9	38.8	42.8	1420.7	18.29	22.22	A3
		4020.0	2648.60	12.7	965	170.3	189.6	208.8	194003.6	5.58	6.77	
40-2293	OZ	75.1	90.28	1	24	46.3	50.9	55.4	900.7	16.46	18.55	A3
		4035.3	2293.00	25.4	609	226.2	248.5	270.7	122996.1	5.02	5.66	
40-2547	OZ	75.3	100.28	0.688	34	38.2	41.2	44.2	1279.4	16.66	20.12	A1
		4046.1	2547.00	17.462	863	186.6	201.1	215.6	174711.0	5.08	6.13	
40-2451	OZ	75.3	96.51	0.562	36	35.8	38.9	41.9	1355.0	16.92	20.65	A2
		4047.1	2451.40	14.288	914	174.6	189.7	204.8	185031.4	5.16	6.29	
41-2598	OZ	75.4	102.28	0.625	36	36.5	39.4	42.3	1358.0	16.92	20.65	A1
		4056.2	2597.80	15.875	914	178.1	192.3	206.6	185451.5	5.16	6.29	
41-2750	OZ	75.6	108.28	0.438	42	32.9	36.7	40.5	1587.6	18.82	23.27	A3
		4064.6	2750.20	11.112	1066	160.8	179.3	197.8	216807.1	5.74	7.09	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
41-2598	OZ	75.8	102.28	0.551	36	36.6	40.6	44.6	1364.9	18.03	21.70	A3
		4076.7	2597.80	14	914	178.5	198.1	217.7	186388.6	5.50	6.61	
41-2350	OZ	75.9	92.51	0.688	31	39.5	42.7	46.0	1213.8	16.39	19.60	A2
		4078.5	2349.80	17.462	812	193.0	208.7	224.4	165749.4	5.00	5.97	
41-2699	OZ	75.9	106.28	0.472	40	34.1	38.0	41.9	1518.5	18.56	22.74	A3
		4082.0	2699.40	12	1016	166.7	185.6	204.4	207366.5	5.66	6.93	
41-2903	OZ	76.1	114.28	0.394	48	28.9	31.5	34.1	1825.9	18.49	23.79	A1
		4090.3	2902.60	10	1219	140.9	153.7	166.4	249345.1	5.64	7.25	
41-2401	OZ	76.1	94.51	0.625	34	37.8	40.9	44.1	1294.1	16.66	20.12	A2
		4092.6	2400.60	15.875	863	184.4	199.8	215.2	176717.9	5.08	6.13	
41-2395	OZ	76.4	94.28	0.812	28	43.1	47.5	51.8	1070.0	16.99	19.60	A3
		4109.2	2394.60	20.638	711	210.6	231.9	253.2	146122.1	5.18	5.97	
41-2445	OZ	76.5	96.28	0.875	30	43.2	46.3	49.4	1147.1	16.13	19.07	A1
		4111.4	2445.40	22.225	762	211.2	226.3	241.4	156643.1	4.92	5.81	
41-2248	OZ	76.8	88.51	0.875	28	44.5	47.9	51.2	1075.0	15.87	18.55	A2
		4128.3	2248.20	22.225	711	217.3	233.7	250.2	146804.1	4.84	5.65	
41-2395	OZ	76.8	94.28	1	28	46.2	49.4	52.6	1075.1	15.87	18.55	A1
		4128.6	2394.60	25.4	711	225.7	241.1	256.6	146812.4	4.84	5.65	
41-2598	OZ	77.1	102.28	0.562	36	37.1	41.1	45.1	1387.0	18.03	21.70	A3
		4142.9	2597.80	14.288	914	180.9	200.5	220.1	189412.6	5.50	6.61	
42-2496	OZ	77.2	98.28	0.787	31	41.2	44.2	47.2	1235.1	16.39	19.60	A1
		4150.0	2496.20	20	812	201.1	215.9	230.7	168657.6	5.00	5.97	
42-2953	OZ	77.2	116.28	0.375	50	28.2	30.8	33.4	1930.3	18.75	24.31	A1
		4151.2	2953.40	9.525	1270	137.8	150.3	162.8	263598.6	5.71	7.41	
42-2547	OZ	77.3	100.28	0.709	34	39.1	42.1	45.0	1313.8	16.66	20.12	A1
		4155.1	2547.00	18	863	190.9	205.4	219.9	179417.6	5.08	6.13	
42-2299	OZ	77.6	90.51	0.787	30	42.5	45.8	49.1	1163.9	16.13	19.07	A2
		4171.5	2299.00	20	762	207.4	223.5	239.6	158935.5	4.92	5.81	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
42-2350	OZ	77.8	92.51	0.709	31	40.4	43.6	46.9	1244.7	16.39	19.60	A2
		4182.3	2349.80	18	812	197.3	213.1	228.8	169968.5	5.00	5.97	
42-2750	OZ	77.8	108.28	0.5	42	32.8	35.6	38.4	1633.8	17.70	22.22	A1
		4182.8	2750.20	12.7	1066	160.4	173.8	187.2	223112.5	5.40	6.77	
42-2445	OZ	77.8	96.28	0.75	30	42.0	46.3	50.6	1167.2	17.25	20.12	A3
		4183.4	2445.40	19.05	762	205.2	226.1	246.9	159387.4	5.26	6.13	
42-2756	OZ	78.2	108.51	0.375	48	29.4	32.1	34.9	1877.0	18.49	23.79	A2
		4204.7	2756.20	9.525	1219	143.3	156.7	170.2	256317.4	5.64	7.25	
42-2547	OZ	78.3	100.28	0.625	34	39.0	43.1	47.2	1330.3	17.77	21.17	A3
		4207.1	2547.00	15.875	863	190.3	210.3	230.3	181664.3	5.42	6.45	
42-2903	OZ	78.3	114.28	0.375	48	30.8	34.4	38.0	1879.4	19.60	24.84	A3
		4210.0	2902.60	9.525	1219	150.6	168.1	185.7	256643.0	5.98	7.57	
42-2496	OZ	78.5	98.28	0.688	31	40.6	44.8	49.0	1255.4	17.51	20.65	A3
		4218.5	2496.20	17.462	812	198.4	218.9	239.3	171439.8	5.34	6.29	
42-2553	OZ	78.6	100.51	0.5	40	34.1	37.1	40.0	1572.1	17.44	21.69	A2
		4225.9	2553.00	12.7	1016	166.5	181.0	195.5	214677.6	5.32	6.61	
42-2699	OZ	79.0	106.28	0.551	40	34.7	37.5	40.3	1580.4	17.44	21.69	A1
		4248.4	2699.40	14	1016	169.2	182.9	196.6	215819.1	5.32	6.61	
43-2801	OZ	79.2	110.28	0.472	43	32.0	34.7	37.4	1742.0	17.96	22.74	A1
		4257.0	2801.00	12	1117	156.4	169.6	182.8	237883.6	5.48	6.93	
43-2496	OZ	79.3	98.28	0.812	31	42.2	45.2	48.2	1268.9	16.39	19.60	A1
		4263.7	2496.20	20.638	812	205.9	220.7	235.6	173275.0	5.00	5.97	
43-2699	OZ	79.6	106.28	0.5	40	35.4	39.3	43.2	1591.2	18.56	22.74	A3
		4277.3	2699.40	12.7	1016	173.0	191.9	210.8	217286.1	5.66	6.93	
43-2299	OZ	79.6	90.51	0.812	30	43.5	46.8	50.1	1193.8	16.13	19.07	A2
		4278.8	2299.00	20.638	762	212.4	228.4	244.5	163023.1	4.92	5.81	
43-2655	OZ	79.7	104.51	0.438	43	32.0	34.8	37.7	1753.2	17.96	22.74	A2
		4284.4	2654.60	11.112	1117	156.0	169.9	183.9	239410.1	5.48	6.93	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
43-2502	OZ	79.7	98.51	0.551	38	36.0	39.0	42.0	1514.7	17.18	21.17	A2
		4286.1	2502.20	14	965	175.6	190.3	205.1	206845.0	5.24	6.45	
43-2604	OZ	80.0	102.51	0.472	42	33.3	36.2	39.1	1680.2	17.70	22.22	A2
		4301.5	2603.80	12	1066	162.5	176.7	190.9	229439.7	5.40	6.77	
43-2801	OZ	80.1	110.28	0.438	43	33.3	37.1	40.8	1762.1	19.08	23.79	A3
		4306.2	2801.00	11.112	1117	162.8	181.0	199.2	240631.2	5.82	7.25	
43-2496	OZ	80.3	98.28	0.709	31	41.5	45.7	49.9	1284.5	17.51	20.65	A3
		4316.2	2496.20	18	812	202.6	223.0	243.4	175411.4	5.34	6.29	
43-2395	OZ	80.5	94.28	0.875	28	45.4	49.7	54.1	1126.9	16.99	19.60	A3
		4327.7	2394.60	22.225	711	221.5	242.8	264.1	153894.2	5.18	5.97	
43-2699	OZ	80.5	106.28	0.562	40	35.2	38.0	40.8	1609.9	17.44	21.69	A1
		4327.7	2699.40	14.288	1016	171.8	185.5	199.2	219849.2	5.32	6.61	
43-2445	OZ	80.6	96.28	0.787	30	43.5	47.7	52.0	1209.4	17.25	20.12	A3
		4334.7	2445.40	20	762	212.2	233.0	253.8	165152.0	5.26	6.13	
43-2750	OZ	80.6	108.28	0.472	42	34.6	38.4	42.2	1693.1	18.82	23.27	A3
		4334.7	2750.20	12	1066	169.1	187.6	206.1	231214.1	5.74	7.09	
43-2953	OZ	80.8	116.28	0.394	50	29.2	31.8	34.4	2020.7	18.75	24.31	A1
		4345.6	2953.40	10	1270	142.8	155.3	167.8	275948.1	5.71	7.41	
44-2649	OZ	80.9	104.28	0.551	38	37.2	41.2	45.1	1537.3	18.29	22.22	A3
		4350.1	2648.60	14	965	181.7	200.9	220.2	209936.4	5.58	6.77	
44-2445	OZ	81.0	96.28	0.938	30	45.6	48.7	51.8	1215.6	16.13	19.07	A1
		4356.9	2445.40	23.812	762	222.6	237.7	252.9	165999.4	4.92	5.81	
44-2248	OZ	81.1	88.51	0.938	28	46.9	50.2	53.6	1134.8	15.87	18.55	A2
		4357.8	2248.20	23.812	711	228.9	245.3	261.8	154964.9	4.84	5.65	
44-2502	OZ	81.2	98.51	0.562	38	36.5	39.5	42.6	1541.9	17.18	21.17	A2
		4362.9	2502.20	14.288	965	178.2	193.0	207.8	210555.9	5.24	6.45	
44-2547	OZ	81.2	100.28	0.75	34	40.8	43.8	46.8	1380.8	16.66	20.12	A1
		4366.8	2547.00	19.05	863	199.3	213.8	228.3	188559.5	5.08	6.13	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
44-2350	OZ	81.5	92.51	0.75	31	42.2	45.4	48.6	1304.6	16.39	19.60	A2
		4383.9	2349.80	19.05	812	205.9	221.6	237.4	178160.3	5.00	5.97	
44-2451	OZ	81.6	96.51	0.618	36	38.3	41.4	44.5	1469.6	16.92	20.65	A2
		4389.4	2451.40	15.7	914	187.2	202.3	217.3	200684.4	5.16	6.29	
44-2903	OZ	81.7	114.28	0.394	48	31.8	35.4	39.0	1960.6	19.60	24.84	A3
		4392.0	2902.60	10	1219	155.4	172.9	190.5	267738.9	5.98	7.57	
44-2756	OZ	81.8	108.51	0.394	48	30.4	33.1	35.9	1962.5	18.49	23.79	A2
		4396.4	2756.20	10	1219	148.4	161.8	175.3	268002.7	5.64	7.25	
44-3004	OZ	81.8	118.28	0.375	52	28.6	31.1	33.6	2127.4	19.01	24.83	A1
		4399.2	3004.20	9.525	1320	139.4	151.7	164.1	290520.3	5.79	7.57	
44-2649	OZ	81.9	104.28	0.625	38	37.3	40.2	43.0	1556.3	17.18	21.17	A1
		4403.8	2648.60	15.875	965	182.2	196.1	210.1	212526.2	5.24	6.45	
44-2598	OZ	82.1	102.28	0.688	36	39.2	42.1	45.0	1478.2	16.92	20.65	A1
		4415.2	2597.80	17.462	914	191.4	205.6	219.8	201864.7	5.16	6.29	
44-2649	OZ	82.3	104.28	0.562	38	37.7	41.7	45.6	1563.0	18.29	22.22	A3
		4422.8	2648.60	14.288	965	184.2	203.4	222.7	213442.2	5.58	6.77	
44-2451	OZ	82.4	96.51	0.625	36	38.7	41.7	44.8	1483.7	16.92	20.65	A2
		4431.6	2451.40	15.875	914	188.7	203.8	218.9	202613.2	5.16	6.29	
44-2445	OZ	82.5	96.28	0.812	30	44.4	48.7	52.9	1237.5	17.25	20.12	A3
		4435.6	2445.40	20.638	762	216.8	237.6	258.5	168994.8	5.26	6.13	
44-2953	OZ	82.5	116.28	0.375	50	31.1	34.7	38.2	2062.7	19.87	25.36	A3
		4435.8	2953.40	9.525	1270	152.0	169.3	186.5	281676.0	6.05	7.73	
44-2401	OZ	82.5	94.51	0.688	34	40.6	43.7	46.9	1402.9	16.66	20.12	A2
		4436.8	2400.60	17.462	863	198.0	213.4	228.8	191580.9	5.08	6.13	
45-2807	OZ	82.8	110.51	0.375	50	29.7	32.4	35.1	2069.9	18.75	24.31	A2
		4451.4	2807.00	9.525	1270	145.0	158.2	171.3	282661.9	5.71	7.41	
45-2598	OZ	83.1	102.28	0.618	36	39.5	43.5	47.5	1495.2	18.03	21.70	A3
		4466.0	2597.80	15.7	914	192.8	212.4	232.0	204183.4	5.50	6.61	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
45-2801	OZ	83.4	110.28	0.5	43	33.4	36.1	38.8	1835.8	17.96	22.74	A1
		4486.3	2801.00	12.7	1117	163.1	176.3	189.5	250694.8	5.48	6.93	
45-2598	OZ	83.8	102.28	0.625	36	39.8	43.8	47.8	1508.5	18.03	21.70	A3
		4505.8	2597.80	15.875	914	194.2	213.9	233.5	206003.5	5.50	6.61	
45-2496	OZ	83.8	98.28	0.75	31	43.1	47.3	51.5	1341.0	17.51	20.65	A3
		4506.0	2496.20	19.05	812	210.6	231.0	251.4	183122.7	5.34	6.29	
45-2903	OZ	84.0	114.28	0.438	48	31.2	33.8	36.4	2015.5	18.49	23.79	A1
		4514.9	2902.60	11.112	1219	152.3	165.0	177.7	275229.4	5.64	7.25	
45-2604	OZ	84.2	102.51	0.5	42	34.7	37.6	40.5	1767.6	17.70	22.22	A2
		4525.4	2603.80	12.7	1066	169.4	183.6	197.8	241387.2	5.40	6.77	
45-2547	OZ	84.3	100.28	0.688	34	41.6	45.7	49.8	1432.9	17.77	21.17	A3
		4531.6	2547.00	17.462	863	203.1	223.1	243.1	195672.9	5.42	6.45	
45-2598	OZ	84.4	102.28	0.709	36	40.1	43.0	45.9	1518.6	16.92	20.65	A1
		4535.9	2597.80	18	914	195.9	210.1	224.3	207381.7	5.16	6.29	
45-2395	OZ	84.5	94.28	0.938	28	47.6	52.0	56.3	1183.1	16.99	19.60	A3
		4543.2	2394.60	23.812	711	232.4	253.7	275.0	161556.0	5.18	5.97	
45-2299	OZ	84.5	90.51	0.875	30	46.0	49.3	52.6	1267.6	16.13	19.07	A2
		4543.5	2299.00	22.225	762	224.6	240.7	256.8	173107.9	4.92	5.81	
45-2496	OZ	84.5	98.28	0.875	31	44.7	47.7	50.7	1352.3	16.39	19.60	A1
		4544.1	2496.20	22.225	812	218.0	232.8	247.6	184673.9	5.00	5.97	
45-2750	OZ	84.6	108.28	0.5	42	36.0	39.8	43.6	1776.0	18.82	23.27	A3
		4546.8	2750.20	12.7	1066	175.6	194.1	212.7	242525.6	5.74	7.09	
46-2401	OZ	84.7	94.51	0.709	34	41.5	44.6	47.8	1439.5	16.66	20.12	A2
		4552.4	2400.60	18	863	202.6	218.0	233.4	196574.4	5.08	6.13	
46-2547	OZ	84.8	100.28	0.787	34	42.4	45.3	48.3	1440.9	16.66	20.12	A1
		4557.0	2547.00	20	863	206.9	221.4	235.9	196770.5	5.08	6.13	
46-2350	OZ	84.9	92.51	0.787	31	43.7	47.0	50.2	1358.5	16.39	19.60	A2
		4564.8	2349.80	20	812	213.6	229.3	245.1	185514.9	5.00	5.97	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in ³ /ft (cm ³ /m)	in (mm)	in (mm)		in (mm)	lb/ft ² (kg/m ²)	
46-2750	OZ	85.1	108.28	0.551	42	35.3	38.1	40.8	1786.8	17.70	22.22	A1
		4574.4	2750.20	14	1066	172.5	185.9	199.4	243999.0	5.40	6.77	
46-2248	OZ	85.3	88.51	1	28	49.2	52.6	56.0	1193.7	15.87	18.55	A2
		4584.1	2248.20	25.4	711	240.4	256.8	273.3	163009.1	4.84	5.65	
46-2655	OZ	85.4	104.51	0.472	43	33.8	36.7	39.5	1879.2	17.96	22.74	A2
		4592.4	2654.60	12	1117	165.0	179.0	192.9	256623.2	5.48	6.93	
46-2801	OZ	85.5	110.28	0.472	43	35.1	38.8	42.6	1881.6	19.08	23.79	A3
		4598.2	2801.00	12	1117	171.4	189.6	207.8	256944.7	5.82	7.25	
46-2445	OZ	85.5	96.28	1	30	47.9	51.0	54.1	1283.2	16.13	19.07	A1
		4599.3	2445.40	25.4	762	234.0	249.1	264.3	175231.5	4.92	5.81	
46-3004	OZ	85.7	118.28	0.394	52	29.6	32.1	34.6	2227.6	19.01	24.83	A1
		4606.3	3004.20	10	1320	144.5	156.8	169.1	304201.8	5.79	7.57	
46-2553	OZ	85.7	100.51	0.551	40	36.7	39.6	42.6	1713.8	17.44	21.69	A2
		4607.1	2553.00	14	1016	178.9	193.4	207.9	234039.2	5.32	6.61	
46-2953	OZ	86.1	116.28	0.394	50	32.1	35.7	39.2	2153.1	19.87	25.36	A3
		4630.3	2953.40	10	1270	157.0	174.2	191.5	294025.5	6.05	7.73	
46-2699	OZ	86.3	106.28	0.551	40	37.8	41.7	45.6	1725.2	18.56	22.74	A3
		4637.7	2699.40	14	1016	184.8	203.7	222.5	235597.5	5.66	6.93	
46-2547	OZ	86.3	100.28	0.709	34	42.5	46.6	50.7	1467.3	17.77	21.17	A3
		4640.6	2547.00	18	863	207.4	227.4	247.4	200379.5	5.42	6.45	
47-3055	OZ	86.5	120.28	0.375	53	28.9	31.4	33.8	2336.2	19.27	25.36	A1
		4652.0	3055.00	9.525	1371	141.0	153.1	165.2	319032.7	5.87	7.73	
47-2807	OZ	86.6	110.51	0.394	50	30.8	33.5	36.2	2165.0	18.75	24.31	A2
		4656.0	2807.00	10	1270	150.2	163.4	176.5	295655.5	5.71	7.41	
47-2750	OZ	86.7	108.28	0.562	42	35.9	38.6	41.4	1820.4	17.70	22.22	A1
		4660.6	2750.20	14.288	1066	175.2	188.6	202.1	248597.2	5.40	6.77	
47-3004	OZ	86.8	118.28	0.375	52	31.4	34.9	38.4	2257.6	20.13	25.88	A3
		4668.3	3004.20	9.525	1320	153.4	170.4	187.3	308292.1	6.13	7.89	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
47-2496	OZ	87.0	98.28	0.787	31	44.6	48.8	53.0	1391.7	17.51	20.65	A3
		4676.3	2496.20	20	812	217.9	238.3	258.7	190046.1	5.34	6.29	
47-2547	OZ	87.1	100.28	0.812	34	43.4	46.4	49.4	1481.0	16.66	20.12	A1
		4683.9	2547.00	20.638	863	212.0	226.5	241.0	202248.9	5.08	6.13	
47-2445	OZ	87.1	96.28	0.875	30	46.8	51.0	55.3	1307.0	17.25	20.12	A3
		4684.4	2445.40	22.225	762	228.3	249.1	270.0	178475.9	5.26	6.13	
47-2350	OZ	87.2	92.51	0.812	31	44.8	48.0	51.3	1394.4	16.39	19.60	A2
		4685.5	2349.80	20.638	812	218.8	234.5	250.2	190420.0	5.00	5.97	
47-2553	OZ	87.3	100.51	0.562	40	37.2	40.2	43.1	1745.0	17.44	21.69	A2
		4691.0	2553.00	14.288	1016	181.7	196.2	210.6	238300.4	5.32	6.61	
47-2858	OZ	87.5	112.51	0.375	52	30.0	32.7	35.3	2274.7	19.01	24.83	A2
		4703.6	2857.80	9.525	1320	146.6	159.5	172.5	310623.9	5.79	7.57	
47-2699	OZ	87.7	106.28	0.562	40	38.4	42.2	46.1	1754.8	18.56	22.74	A3
		4717.1	2699.40	14.288	1016	187.4	206.2	225.1	239627.7	5.66	6.93	
48-2395	OZ	88.5	94.28	1	28	49.8	54.2	58.5	1238.4	16.99	19.60	A3
		4755.6	2394.60	25.4	711	243.2	264.5	285.8	169108.4	5.18	5.97	
48-2699	OZ	88.6	106.28	0.625	40	38.1	40.9	43.7	1772.0	17.44	21.69	A1
		4763.3	2699.40	15.875	1016	186.1	199.8	213.5	241976.4	5.32	6.61	
48-2598	OZ	88.7	102.28	0.75	36	41.9	44.8	47.7	1597.1	16.92	20.65	A1
		4770.4	2597.80	19.05	914	204.6	218.8	233.1	218100.7	5.16	6.29	
48-2401	OZ	88.9	94.51	0.75	34	43.3	46.5	49.6	1510.5	16.66	20.12	A2
		4777.1	2400.60	19.05	863	211.5	226.9	242.3	206273.8	5.08	6.13	
48-2502	OZ	89.0	98.51	0.625	38	39.5	42.5	45.6	1691.0	17.18	21.17	A2
		4785.0	2502.20	15.875	965	192.9	207.6	222.4	230923.6	5.24	6.45	
48-2496	OZ	89.1	98.28	0.812	31	45.6	49.8	54.0	1425.5	17.51	20.65	A3
		4789.9	2496.20	20.638	812	222.7	243.2	263.6	194663.5	5.34	6.29	
48-2649	OZ	89.3	104.28	0.688	38	40.1	43.0	45.9	1695.8	17.18	21.17	A1
		4798.4	2648.60	17.462	965	196.0	209.9	223.9	231572.5	5.24	6.45	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
48-2953	OZ	89.3	116.28	0.438	50	31.6	34.2	36.7	2231.7	18.75	24.31	A1
		4799.4	2953.40	11.112	1270	154.4	166.9	179.4	304762.3	5.71	7.41	
48-2299	OZ	89.4	90.51	0.938	30	48.5	51.8	55.1	1340.5	16.13	19.07	A2
		4804.7	2299.00	23.812	762	236.8	252.9	269.0	183060.0	4.92	5.81	
48-2451	OZ	89.5	96.51	0.688	36	41.5	44.6	47.7	1611.1	16.92	20.65	A2
		4812.0	2451.40	17.462	914	202.8	217.9	233.0	220006.5	5.16	6.29	
48-2903	OZ	89.6	114.28	0.438	48	34.1	37.7	41.3	2150.2	19.60	24.84	A3
		4816.7	2902.60	11.112	1219	166.7	184.3	201.8	293623.3	5.98	7.57	
48-2496	OZ	89.7	98.28	0.938	31	47.1	50.1	53.2	1434.8	16.39	19.60	A1
		4821.2	2496.20	23.812	812	230.0	244.8	259.7	195932.2	5.00	5.97	
48-2649	OZ	89.7	104.28	0.625	38	40.6	44.5	48.4	1703.9	18.29	22.22	A3
		4821.5	2648.60	15.875	965	198.0	217.3	236.5	232684.1	5.58	6.77	
48-2801	OZ	89.8	110.28	0.5	43	36.5	40.2	43.9	1975.4	19.08	23.79	A3
		4827.4	2801.00	12.7	1117	178.1	196.3	214.5	269755.8	5.82	7.25	
48-2655	OZ	89.9	104.51	0.5	43	35.3	38.1	41.0	1978.2	17.96	22.74	A2
		4834.3	2654.60	12.7	1117	172.1	186.1	200.0	270140.9	5.48	6.93	
48-2756	OZ	90.1	108.51	0.438	48	32.8	35.6	38.3	2162.2	18.49	23.79	A2
		4843.5	2756.20	11.112	1219	160.4	173.8	187.2	295262.0	5.64	7.25	
49-2903	OZ	90.2	114.28	0.472	48	33.0	35.6	38.3	2165.9	18.49	23.79	A1
		4852.0	2902.60	12	1219	161.3	174.0	186.8	295775.5	5.64	7.25	
49-2547	OZ	90.3	100.28	0.75	34	44.2	48.3	52.4	1534.3	17.77	21.17	A3
		4852.3	2547.00	19.05	863	215.8	235.8	255.8	209521.4	5.42	6.45	
49-2598	OZ	90.5	102.28	0.688	36	42.5	46.5	50.5	1628.7	18.03	21.70	A3
		4864.8	2597.80	17.462	914	207.5	227.1	246.7	222416.7	5.50	6.61	
49-3055	OZ	90.6	120.28	0.394	53	29.9	32.4	34.9	2446.7	19.27	25.36	A1
		4872.0	3055.00	10	1371	146.2	158.3	170.4	334124.7	5.87	7.73	
49-3004	OZ	90.7	118.28	0.394	52	32.5	35.9	39.4	2357.8	20.13	25.88	A3
		4875.4	3004.20	10	1320	158.5	175.4	192.4	321973.6	6.13	7.89	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
49-3055	OZ	91.3	120.28	0.375	53	31.7	35.1	38.5	2464.2	20.39	26.41	A3
		4906.8	3055.00	9.525	1371	154.8	171.4	188.1	336509.0	6.21	8.05	
49-3106	OZ	91.3	122.28	0.375	56	29.2	31.6	34.1	2556.8	19.54	25.88	A1
		4909.4	3105.80	9.525	1422	142.6	154.5	166.4	349153.2	5.95	7.89	
49-2858	OZ	91.5	112.51	0.394	52	31.1	33.8	36.4	2380.0	19.01	24.83	A2
		4921.4	2857.80	10	1320	151.9	164.9	177.8	325006.3	5.79	7.57	
49-2445	OZ	91.7	96.28	0.938	30	49.1	53.4	57.6	1375.5	17.25	20.12	A3
		4930.0	2445.40	23.812	762	239.8	260.6	281.4	187832.3	5.26	6.13	
49-2649	OZ	91.7	104.28	0.709	38	41.1	43.9	46.8	1742.7	17.18	21.17	A1
		4931.2	2648.60	18	965	200.6	214.6	228.5	237977.3	5.24	6.45	
49-2750	OZ	91.8	108.28	0.598	42	37.6	40.4	43.1	1926.9	17.70	22.22	A1
		4933.3	2750.20	15.2	1066	183.7	197.1	210.5	263140.1	5.40	6.77	
49-2750	OZ	91.9	108.28	0.551	42	38.5	42.2	46.0	1928.9	18.82	23.27	A3
		4938.4	2750.20	14	1066	187.7	206.3	224.8	263412.2	5.74	7.09	
49-2604	OZ	91.9	102.51	0.551	42	37.3	40.2	43.1	1929.2	17.70	22.22	A2
		4939.0	2603.80	14	1066	182.2	196.4	210.6	263448.1	5.40	6.77	
49-2451	OZ	91.9	96.51	0.709	36	42.5	45.6	48.7	1653.9	16.92	20.65	A2
		4939.9	2451.40	18	914	207.6	222.6	237.7	225853.0	5.16	6.29	
50-2909	OZ	92.3	114.51	0.375	53	30.3	32.9	35.5	2491.4	19.27	25.36	A2
		4960.9	2908.60	9.525	1371	148.1	160.8	173.5	340220.4	5.87	7.73	
50-2401	OZ	92.6	94.51	0.787	34	45.0	48.1	51.3	1574.3	16.66	20.12	A2
		4978.8	2400.60	20	863	219.5	234.9	250.3	214985.6	5.08	6.13	
50-2598	OZ	92.6	102.28	0.787	36	43.5	46.4	49.4	1667.7	16.92	20.65	A1
		4981.0	2597.80	20	914	212.5	226.7	241.0	227733.0	5.16	6.29	
50-2350	OZ	92.7	92.51	0.875	31	47.4	50.7	53.9	1483.1	16.39	19.60	A2
		4983.5	2349.80	22.225	812	231.6	247.3	263.1	202529.2	5.00	5.97	
50-2598	OZ	92.7	102.28	0.709	36	43.4	47.4	51.5	1669.1	18.03	21.70	A3
		4985.4	2597.80	18	914	212.0	231.6	251.2	227933.7	5.50	6.61	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
50-2547	OZ	92.9	100.28	0.875	34	46.0	49.0	51.9	1580.1	16.66	20.12	A1
		4997.2	2547.00	22.225	863	224.6	239.1	253.6	215780.9	5.08	6.13	
50-2801	OZ	93.1	110.28	0.562	43	36.5	39.2	41.9	2047.2	17.96	22.74	A1
		5003.0	2801.00	14.288	1117	178.4	191.6	204.8	279566.6	5.48	6.93	
50-2750	OZ	93.5	108.28	0.562	42	39.0	42.8	46.6	1962.6	18.82	23.27	A3
		5024.6	2750.20	14.288	1066	190.4	208.9	227.5	268010.3	5.74	7.09	
50-2604	OZ	93.6	102.51	0.562	42	37.9	40.8	43.7	1964.8	17.70	22.22	A2
		5030.1	2603.80	14.288	1066	185.0	199.2	213.4	268304.8	5.40	6.77	
50-2547	OZ	93.8	100.28	0.787	34	45.8	49.8	53.9	1594.4	17.77	21.17	A3
		5042.4	2547.00	20	863	223.4	243.4	263.4	217732.4	5.42	6.45	
51-2299	OZ	94.2	90.51	1	30	51.0	54.3	57.6	1412.4	16.13	19.07	A2
		5062.5	2299.00	25.4	762	248.9	265.0	281.1	192879.9	4.92	5.81	
51-2496	OZ	94.3	98.28	0.875	31	48.1	52.3	56.5	1509.0	17.51	20.65	A3
		5070.4	2496.20	22.225	812	234.8	255.2	275.6	206062.4	5.34	6.29	
51-2953	OZ	94.6	116.28	0.438	50	34.5	38.1	41.6	2364.1	19.87	25.36	A3
		5084.1	2953.40	11.112	1270	168.6	185.8	203.1	322839.8	6.05	7.73	
51-3004	OZ	94.7	118.28	0.438	52	32.0	34.6	37.1	2461.4	19.01	24.83	A1
		5089.8	3004.20	11.112	1320	156.4	168.7	181.0	336128.1	5.79	7.57	
51-2496	OZ	94.8	98.28	1	31	49.6	52.6	55.6	1516.2	16.39	19.60	A1
		5094.8	2496.20	25.4	812	242.0	256.8	271.6	207051.5	5.00	5.97	
51-2401	OZ	95.1	94.51	0.812	34	46.1	49.2	52.4	1616.9	16.66	20.12	A2
		5113.4	2400.60	20.638	863	224.9	240.3	255.7	220798.1	5.08	6.13	
51-2560	OZ	95.1	100.78	0.875	34	46.3	49.3	52.2	1640.7	16.72	20.25	A1
		5113.5	2559.70	22.225	876	226.2	240.6	255.1	224048.2	5.10	6.17	
51-2903	OZ	95.2	114.28	0.5	48	34.5	37.1	39.7	2284.1	18.49	23.79	A1
		5116.7	2902.60	12.7	1219	168.4	181.1	193.9	311916.6	5.64	7.25	
51-2598	OZ	95.3	102.28	0.812	36	44.6	47.5	50.4	1714.7	16.92	20.65	A1
		5121.6	2597.80	20.638	914	217.8	232.0	246.2	234161.6	5.16	6.29	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
51-3055	OZ	95.4	120.28	0.394	53	32.8	36.2	39.6	2574.7	20.39	26.41	A3
		5126.9	3055.00	10	1371	159.9	176.6	193.3	351601.0	6.21	8.05	
51-2807	OZ	95.5	110.51	0.438	50	33.3	36.0	38.7	2387.0	18.75	24.31	A2
		5133.4	2807.00	11.112	1270	162.4	175.6	188.8	325972.6	5.71	7.41	
51-2750	OZ	95.5	108.28	0.625	42	38.9	41.7	44.4	2005.4	17.70	22.22	A1
		5134.0	2750.20	15.875	1066	189.9	203.4	216.8	273848.8	5.40	6.77	
51-3106	OZ	95.7	122.28	0.394	56	30.3	32.7	35.2	2678.2	19.54	25.88	A1
		5142.5	3105.80	10	1422	147.9	159.8	171.7	365735.1	5.95	7.89	
52-3106	OZ	95.8	122.28	0.375	56	32.0	35.3	38.7	2682.7	20.65	26.93	A3
		5151.1	3105.80	9.525	1422	156.1	172.5	188.9	366343.6	6.29	8.21	
52-2553	OZ	95.8	100.51	0.625	40	40.3	43.3	46.2	1916.4	17.44	21.69	A2
		5151.5	2553.00	15.875	1016	196.8	211.3	225.8	261696.4	5.32	6.61	
52-2699	OZ	95.8	106.28	0.625	40	41.3	45.2	49.0	1916.8	18.56	22.74	A3
		5152.7	2699.40	15.875	1016	201.7	220.5	239.4	261754.8	5.66	6.93	
52-2903	OZ	95.9	114.28	0.472	48	36.0	39.6	43.2	2300.6	19.60	24.84	A3
		5153.7	2902.60	12	1219	175.7	193.3	210.8	314169.4	5.98	7.57	
52-2953	OZ	96.0	116.28	0.472	50	33.5	36.1	38.6	2399.3	18.75	24.31	A1
		5159.7	2953.40	12	1270	163.6	176.1	188.6	327639.0	5.71	7.41	
52-2547	OZ	96.1	100.28	0.812	34	46.8	50.9	55.0	1634.5	17.77	21.17	A3
		5169.3	2547.00	20.638	863	228.5	248.5	268.5	223210.8	5.42	6.45	
52-2445	OZ	96.2	96.28	1	30	51.4	55.7	60.0	1443.1	17.25	20.12	A3
		5172.3	2445.40	25.4	762	251.2	272.0	292.9	197064.3	5.26	6.13	
52-2451	OZ	96.5	96.51	0.75	36	44.4	47.5	50.6	1737.1	16.92	20.65	A2
		5188.4	2451.40	19.05	914	216.8	231.9	247.0	237212.2	5.16	6.29	
52-2649	OZ	96.5	104.28	0.75	38	42.9	45.8	48.7	1833.8	17.18	21.17	A1
		5189.1	2648.60	19.05	965	209.7	223.7	237.6	250425.1	5.24	6.45	
52-2909	OZ	96.6	114.51	0.394	53	31.5	34.1	36.7	2607.5	19.27	25.36	A2
		5192.1	2908.60	10	1371	153.6	166.3	179.0	356072.0	5.87	7.73	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in ³ /ft (cm ³ /m)	in (mm)	in (mm)		in (mm)	lb/ft ² (kg/m ²)	
52-2699	OZ	96.6	106.28	0.688	40	41.0	43.8	46.7	1932.4	17.44	21.69	A1
		5194.7	2699.40	17.462	1016	200.4	214.1	227.8	263890.1	5.32	6.61	
52-2756	OZ	96.7	108.51	0.472	48	34.8	37.5	40.3	2320.6	18.49	23.79	A2
		5198.5	2756.20	12	1219	169.9	183.3	196.7	316899.4	5.64	7.25	
52-2502	OZ	96.8	98.51	0.688	38	42.5	45.5	48.5	1838.7	17.18	21.17	A2
		5202.7	2502.20	17.462	965	207.4	222.2	237.0	251084.2	5.24	6.45	
52-2649	OZ	97.0	104.28	0.688	38	43.4	47.3	51.3	1843.4	18.29	22.22	A3
		5216.1	2648.60	17.462	965	211.8	231.0	250.3	251730.3	5.58	6.77	
52-2598	OZ	97.1	102.28	0.75	36	45.2	49.2	53.2	1747.6	18.03	21.70	A3
		5219.9	2597.80	19.05	914	220.8	240.4	260.0	238652.7	5.50	6.61	
52-2959	OZ	97.1	116.51	0.375	56	30.6	33.2	35.8	2720.2	19.54	25.88	A2
		5223.1	2959.40	9.525	1422	149.6	162.1	174.6	371467.2	5.95	7.89	
53-2350	OZ	98.2	92.51	0.938	31	50.1	53.3	56.5	1570.7	16.39	19.60	A2
		5277.8	2349.80	23.812	812	244.4	260.1	275.8	214488.9	5.00	5.97	
53-2750	OZ	98.5	108.28	0.598	42	40.7	44.5	48.3	2069.1	18.82	23.27	A3
		5297.2	2750.20	15.2	1066	198.9	217.4	236.0	282553.3	5.74	7.09	
53-2547	OZ	98.7	100.28	0.938	34	48.6	51.5	54.5	1678.1	16.66	20.12	A1
		5307.0	2547.00	23.812	863	237.2	251.7	266.2	229156.3	5.08	6.13	
53-2604	OZ	98.9	102.51	0.598	42	39.7	42.6	45.5	2077.2	17.70	22.22	A2
		5318.1	2603.80	15.2	1066	194.0	208.2	222.4	283665.4	5.40	6.77	
53-2750	OZ	98.9	108.28	0.65	42	40.1	42.8	45.6	2077.7	17.70	22.22	A1
		5319.2	2750.20	16.5	1066	195.7	209.2	222.6	283726.8	5.40	6.77	
53-2699	OZ	99.3	106.28	0.709	40	42.0	44.8	47.6	1986.4	17.44	21.69	A1
		5339.8	2699.40	18	1016	205.2	218.9	232.6	271261.8	5.32	6.61	
53-2502	OZ	99.4	98.51	0.709	38	43.5	46.5	49.5	1888.3	17.18	21.17	A2
		5343.2	2502.20	18	965	212.4	227.1	241.9	257863.8	5.24	6.45	
53-2801	OZ	99.4	110.28	0.562	43	39.6	43.3	47.1	2186.8	19.08	23.79	A3
		5344.1	2801.00	14.288	1117	193.4	211.5	229.7	298627.6	5.82	7.25	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
53-2496	OZ	99.5	98.28	0.938	31	50.6	54.7	58.9	1591.4	17.51	20.65	A3
		5347.5	2496.20	23.812	812	246.8	267.3	287.7	217320.7	5.34	6.29	
53-2649	OZ	99.5	104.28	0.709	38	44.3	48.3	52.2	1890.3	18.29	22.22	A3
		5348.8	2648.60	18	965	216.5	235.7	254.9	258135.1	5.58	6.77	
54-3004	OZ	99.7	118.28	0.438	52	34.9	38.4	41.8	2591.6	20.13	25.88	A3
		5358.9	3004.20	11.112	1320	170.3	187.3	204.3	353899.9	6.13	7.89	
54-2655	OZ	100.1	104.51	0.562	43	38.6	41.4	44.3	2201.3	17.96	22.74	A2
		5379.5	2654.60	14.288	1117	188.2	202.1	216.1	300605.0	5.48	6.93	
54-3106	OZ	100.1	122.28	0.394	56	33.0	36.4	39.8	2804.1	20.65	26.93	A3
		5384.2	3105.80	10	1422	161.4	177.8	194.2	382925.5	6.29	8.21	
54-3055	OZ	100.2	120.28	0.438	53	32.4	34.9	37.4	2704.7	19.27	25.36	A1
		5385.7	3055.00	11.112	1371	158.3	170.4	182.5	369348.6	5.87	7.73	
54-2451	OZ	100.7	96.51	0.787	36	46.1	49.2	52.3	1811.8	16.92	20.65	A2
		5411.6	2451.40	20	914	225.2	240.3	255.4	247419.8	5.16	6.29	
54-2903	OZ	100.8	114.28	0.5	48	37.4	41.0	44.6	2418.8	19.60	24.84	A3
		5418.5	2902.60	12.7	1219	182.8	200.4	217.9	330310.4	5.98	7.57	
54-2649	OZ	100.8	104.28	0.787	38	44.6	47.5	50.3	1915.8	17.18	21.17	A1
		5420.9	2648.60	20	965	217.9	231.8	245.8	261614.5	5.24	6.45	
54-2858	OZ	101.0	112.51	0.438	52	33.7	36.3	39.0	2625.7	19.01	24.83	A2
		5429.6	2857.80	11.112	1320	164.4	177.3	190.3	358568.1	5.79	7.57	
54-2598	OZ	101.0	102.28	0.787	36	46.8	50.8	54.9	1818.2	18.03	21.70	A3
		5430.6	2597.80	20	914	228.7	248.3	267.9	248285.1	5.50	6.61	
54-2953	OZ	101.2	116.28	0.5	50	35.0	37.6	40.1	2530.9	18.75	24.31	A1
		5442.7	2953.40	12.7	1270	170.9	183.4	195.9	345613.5	5.71	7.41	
54-2953	OZ	101.3	116.28	0.472	50	36.4	40.0	43.5	2531.6	19.87	25.36	A3
		5444.4	2953.40	12	1270	177.8	195.1	212.3	345716.5	6.05	7.73	
54-2401	OZ	101.3	94.51	0.875	34	48.8	52.0	55.1	1722.0	16.66	20.12	A2
		5445.9	2400.60	22.225	863	238.3	253.7	269.1	235155.4	5.08	6.13	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in ³ /ft (cm ³ /m)	in (mm)	in (mm)		in (mm)	lb/ft ² (kg/m ²)	
55-2959	OZ	101.7	116.51	0.394	56	31.8	34.3	36.9	2847.6	19.54	25.88	A2
		5467.8	2959.40	10	1422	155.2	167.7	180.2	388869.4	5.95	7.89	
55-2598	OZ	101.7	102.28	0.875	36	47.3	50.2	53.1	1831.1	16.92	20.65	A1
		5469.1	2597.80	22.225	914	230.9	245.2	259.4	250048.1	5.16	6.29	
55-3004	OZ	101.8	118.28	0.472	52	34.0	36.5	39.0	2647.1	19.01	24.83	A1
		5473.7	3004.20	12	1320	165.8	178.1	190.4	361480.6	5.79	7.57	
55-2756	OZ	101.9	108.51	0.5	48	36.3	39.1	41.8	2445.1	18.49	23.79	A2
		5477.3	2756.20	12.7	1219	177.3	190.7	204.2	333897.8	5.64	7.25	
55-2547	OZ	102.0	100.28	0.875	34	49.4	53.5	57.6	1733.6	17.77	21.17	A3
		5482.7	2547.00	22.225	863	241.1	261.1	281.1	236742.8	5.42	6.45	
55-2903	OZ	102.2	114.28	0.539	48	36.6	39.2	41.8	2452.3	18.49	23.79	A1
		5493.4	2902.60	13.7	1219	178.5	191.3	204.0	334876.8	5.64	7.25	
55-2750	OZ	102.3	108.28	0.625	42	42.0	45.8	49.6	2147.5	18.82	23.27	A3
		5498.0	2750.20	15.875	1066	205.2	223.7	242.2	293261.9	5.74	7.09	
55-2807	OZ	102.5	110.51	0.472	50	35.3	38.0	40.7	2563.3	18.75	24.31	A2
		5512.5	2807.00	12	1270	172.1	185.3	198.5	350042.4	5.71	7.41	
55-2801	OZ	102.6	110.28	0.625	43	39.6	42.4	45.1	2256.8	17.96	22.74	A1
		5515.2	2801.00	15.875	1117	193.6	206.8	220.0	308186.7	5.48	6.93	
55-2604	OZ	102.9	102.51	0.625	42	41.1	44.0	46.9	2160.1	17.70	22.22	A2
		5530.1	2603.80	15.875	1066	200.6	214.8	229.0	294976.2	5.40	6.77	
56-2451	OZ	103.4	96.51	0.812	36	47.3	50.4	53.4	1861.7	16.92	20.65	A2
		5560.6	2451.40	20.638	914	230.8	245.9	261.0	254232.3	5.16	6.29	
56-2413	OZ	103.5	95.01	0.875	34	49.1	52.3	55.4	1785.5	16.72	20.25	A2
		5564.8	2413.30	22.225	876	239.9	255.2	270.6	243822.2	5.10	6.17	
56-2350	OZ	103.6	92.51	1	31	52.7	55.9	59.1	1657.2	16.39	19.60	A2
		5568.4	2349.80	25.4	812	257.1	272.8	288.6	226301.0	5.00	5.97	
56-2598	OZ	103.6	102.28	0.812	36	47.9	51.9	55.9	1865.2	18.03	21.70	A3
		5571.2	2597.80	20.638	914	233.9	253.5	273.2	254713.6	5.50	6.61	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
56-2649	OZ	103.7	104.28	0.812	38	45.8	48.6	51.5	1970.5	17.18	21.17	A1
		5575.7	2648.60	20.638	965	223.4	237.3	251.3	269084.8	5.24	6.45	
56-2699	OZ	103.9	106.28	0.688	40	44.2	48.1	52.0	2077.3	18.56	22.74	A3
		5584.0	2699.40	17.462	1016	215.9	234.8	253.7	283668.6	5.66	6.93	
56-2560	OZ	104.0	100.78	0.875	34	49.7	53.8	57.8	1793.4	17.84	21.30	A3
		5589.5	2559.70	22.225	876	242.6	262.5	282.4	244906.1	5.44	6.49	
56-2750	OZ	104.2	108.28	0.688	42	41.9	44.7	47.4	2188.6	17.70	22.22	A1
		5603.1	2750.20	17.462	1066	204.6	218.1	231.5	298869.2	5.40	6.77	
56-2649	OZ	104.3	104.28	0.75	38	46.2	50.1	54.1	1981.4	18.29	22.22	A3
		5606.8	2648.60	19.05	965	225.5	244.8	264.0	270582.9	5.58	6.77	
56-2553	OZ	104.3	100.51	0.688	40	43.4	46.4	49.3	2086.0	17.44	21.69	A2
		5607.6	2553.00	17.462	1016	211.9	226.4	240.8	284866.8	5.32	6.61	
56-2547	OZ	104.4	100.28	1	34	51.1	54.1	57.1	1774.9	16.66	20.12	A1
		5613.2	2547.00	25.4	863	249.7	264.2	278.7	242376.5	5.08	6.13	
56-2502	OZ	104.5	98.51	0.75	38	45.5	48.5	51.5	1984.8	17.18	21.17	A2
		5616.2	2502.20	19.05	965	222.0	236.7	251.5	271039.9	5.24	6.45	
56-2496	OZ	104.6	98.28	1	31	53.0	57.2	61.4	1672.8	17.51	20.65	A3
		5621.1	2496.20	25.4	812	258.8	279.2	299.6	228440.0	5.34	6.29	
56-2699	OZ	104.6	106.28	0.75	40	44.0	46.8	49.6	2091.3	17.44	21.69	A1
		5621.9	2699.40	19.05	1016	214.6	228.3	242.0	285592.4	5.32	6.61	
56-3055	OZ	104.9	120.28	0.438	53	35.2	38.7	42.1	2832.7	20.39	26.41	A3
		5640.5	3055.00	11.112	1371	172.1	188.8	205.4	386824.9	6.21	8.05	
57-2750	OZ	105.7	108.28	0.65	42	43.2	47.0	50.8	2219.8	18.82	23.27	A3
		5683.2	2750.20	16.5	1066	211.0	229.5	248.0	303140.0	5.74	7.09	
57-3106	OZ	105.8	122.28	0.438	56	32.8	35.3	37.7	2961.7	19.54	25.88	A1
		5686.7	3105.80	11.112	1422	160.2	172.1	184.0	404440.1	5.95	7.89	
57-2903	OZ	106.3	114.28	0.562	48	37.8	40.4	43.0	2550.6	18.49	23.79	A1
		5713.8	2902.60	14.288	1219	184.5	197.2	209.9	348312.2	5.64	7.25	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in ³ /ft (cm ³ /m)	in (mm)	in (mm)		in (mm)	lb/ft ² (kg/m ²)	
57-2604	OZ	106.5	102.51	0.65	42	42.3	45.2	48.2	2236.5	17.70	22.22	A2
		5725.7	2603.80	16.5	1066	206.7	220.9	235.1	305409.6	5.40	6.77	
57-2953	OZ	106.5	116.28	0.5	50	37.9	41.4	45.0	2663.3	19.87	25.36	A3
		5727.4	2953.40	12.7	1270	185.1	202.3	219.6	363691.0	6.05	7.73	
57-2699	OZ	106.6	106.28	0.709	40	45.2	49.1	52.9	2131.2	18.56	22.74	A3
		5729.1	2699.40	18	1016	220.7	239.6	258.5	291040.3	5.66	6.93	
57-2909	OZ	106.6	114.51	0.438	53	34.1	36.7	39.3	2878.4	19.27	25.36	A2
		5731.5	2908.60	11.112	1371	166.3	179.0	191.7	393068.8	5.87	7.73	
57-3004	OZ	106.8	118.28	0.472	52	36.8	40.3	43.8	2777.2	20.13	25.88	A3
		5742.8	3004.20	12	1320	179.8	196.8	213.7	379252.4	6.13	7.89	
58-2750	OZ	107.2	108.28	0.709	42	42.9	45.7	48.4	2250.2	17.70	22.22	A1
		5760.9	2750.20	18	1066	209.6	223.0	236.5	307288.5	5.40	6.77	
58-2553	OZ	107.2	100.51	0.709	40	44.4	47.4	50.4	2143.1	17.44	21.69	A2
		5761.0	2553.00	18	1016	217.0	231.4	245.9	292661.3	5.32	6.61	
58-2401	OZ	107.4	94.51	0.938	34	51.5	54.7	57.8	1825.9	16.66	20.12	A2
		5774.6	2400.60	23.812	863	251.6	267.0	282.4	249346.4	5.08	6.13	
58-3004	OZ	107.4	118.28	0.5	52	35.5	38.0	40.5	2793.0	19.01	24.83	A1
		5775.3	3004.20	12.7	1320	173.3	185.6	197.9	381402.7	5.79	7.57	
58-2547	OZ	107.7	100.28	0.938	34	51.9	56.0	60.1	1831.6	17.77	21.17	A3
		5792.5	2547.00	23.812	863	253.6	273.6	293.6	250118.2	5.42	6.45	
58-3055	OZ	107.8	120.28	0.472	53	34.4	36.9	39.4	2909.5	19.27	25.36	A1
		5793.6	3055.00	12	1371	168.0	180.1	192.2	397322.4	5.87	7.73	
58-2903	OZ	107.8	114.28	0.539	48	39.5	43.1	46.7	2586.9	19.60	24.84	A3
		5795.1	2902.60	13.7	1219	193.0	210.5	228.1	353270.6	5.98	7.57	
58-2807	OZ	108.1	110.51	0.5	50	36.8	39.5	42.2	2701.8	18.75	24.31	A2
		5810.3	2807.00	12.7	1270	179.8	193.0	206.1	368954.4	5.71	7.41	
58-2598	OZ	108.1	102.28	0.938	36	50.0	52.9	55.8	1946.1	16.92	20.65	A1
		5812.8	2597.80	23.812	914	244.0	258.2	272.5	265761.4	5.16	6.29	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
58-2858	OZ	108.5	112.51	0.472	52	35.7	38.4	41.0	2820.9	19.01	24.83	A2
		5833.1	2857.80	12	1320	174.3	187.3	200.2	385219.4	5.79	7.57	
58-2649	OZ	108.6	104.28	0.787	38	47.9	51.8	55.8	2063.4	18.29	22.22	A3
		5838.6	2648.60	20	965	233.7	253.0	272.2	281772.3	5.58	6.77	
59-2801	OZ	108.9	110.28	0.625	43	42.7	46.4	50.2	2396.4	19.08	23.79	A3
		5856.3	2801.00	15.875	1117	208.6	226.7	244.9	327247.8	5.82	7.25	
59-2502	OZ	109.0	98.51	0.787	38	47.2	50.3	53.3	2071.5	17.18	21.17	A2
		5861.7	2502.20	20	965	230.6	245.4	260.2	282883.9	5.24	6.45	
59-2756	OZ	109.3	108.51	0.539	48	38.5	41.3	44.0	2622.1	18.49	23.79	A2
		5874.0	2756.20	13.7	1219	188.0	201.4	214.8	358077.5	5.64	7.25	
59-2699	OZ	109.3	106.28	0.787	40	45.7	48.5	51.3	2185.7	17.44	21.69	A1
		5875.6	2699.40	20	1016	223.1	236.8	250.5	298478.9	5.32	6.61	
59-2598	OZ	110.1	102.28	0.875	36	50.6	54.6	58.6	1981.6	18.03	21.70	A3
		5918.6	2597.80	22.225	914	247.1	266.7	286.3	270600.1	5.50	6.61	
59-2655	OZ	110.1	104.51	0.625	43	41.8	44.7	47.5	2422.4	17.96	22.74	A2
		5919.9	2654.60	15.875	1117	204.3	218.2	232.1	330803.5	5.48	6.93	
59-3106	OZ	110.3	122.28	0.438	56	35.6	38.9	42.3	3087.5	20.65	26.93	A3
		5928.4	3105.80	11.112	1422	173.7	190.1	206.5	421630.5	6.29	8.21	
59-2451	OZ	110.3	96.51	0.875	36	50.1	53.2	56.3	1985.0	16.92	20.65	A2
		5928.9	2451.40	22.225	914	244.7	259.8	274.9	271067.6	5.16	6.29	
60-2649	OZ	110.8	104.28	0.875	38	48.5	51.4	54.3	2105.7	17.18	21.17	A1
		5958.4	2648.60	22.225	965	237.0	251.0	264.9	287553.0	5.24	6.45	
60-2750	OZ	111.0	108.28	0.688	42	45.0	48.8	52.6	2330.7	18.82	23.27	A3
		5967.0	2750.20	17.462	1066	219.9	238.4	256.9	318282.3	5.74	7.09	
60-2649	OZ	111.5	104.28	0.812	38	49.0	52.9	56.9	2118.1	18.29	22.22	A3
		5993.4	2648.60	20.638	965	239.2	258.4	277.7	289242.6	5.58	6.77	
60-2699	OZ	111.8	106.28	0.75	40	47.1	51.0	54.9	2236.2	18.56	22.74	A3
		6011.2	2699.40	19.05	1016	230.1	249.0	267.9	305370.8	5.66	6.93	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in ³ /ft (cm ³ /m)	in (mm)	in (mm)		in (mm)	lb/ft ² (kg/m ²)	
60-2903	OZ	111.9	114.28	0.562	48	40.7	44.3	47.9	2685.3	19.60	24.84	A3
		6015.5	2902.60	14.288	1219	198.9	216.5	234.0	366706.1	5.98	7.57	
60-2801	OZ	112.0	110.28	0.688	43	42.8	45.5	48.2	2464.6	17.96	22.74	A1
		6022.9	2801.00	17.462	1117	208.7	221.9	235.1	336557.3	5.48	6.93	
60-2502	OZ	112.1	98.51	0.812	38	48.4	51.5	54.5	2129.4	17.18	21.17	A2
		6025.5	2502.20	20.638	965	236.4	251.2	266.0	290791.3	5.24	6.45	
60-2604	OZ	112.1	102.51	0.688	42	44.3	47.2	50.1	2353.6	17.70	22.22	A2
		6025.6	2603.80	17.462	1066	216.1	230.3	244.5	321403.3	5.40	6.77	
60-2959	OZ	112.3	116.51	0.438	56	34.4	37.0	39.6	3145.1	19.54	25.88	A2
		6038.9	2959.40	11.112	1422	168.2	180.7	193.1	429489.1	5.95	7.89	
60-3004	OZ	112.4	118.28	0.5	52	38.4	41.8	45.3	2923.1	20.13	25.88	A3
		6044.4	3004.20	12.7	1320	187.3	204.2	221.2	399174.5	6.13	7.89	
60-2699	OZ	112.4	106.28	0.812	40	46.9	49.7	52.5	2248.7	17.44	21.69	A1
		6045.0	2699.40	20.638	1016	228.7	242.4	256.1	307084.2	5.32	6.61	
60-3055	OZ	112.5	120.28	0.472	53	37.2	40.6	44.1	3037.5	20.39	26.41	A3
		6048.4	3055.00	12	1371	181.7	198.4	215.1	414798.7	6.21	8.05	
61-2553	OZ	112.7	100.51	0.75	40	46.5	49.4	52.4	2254.1	17.44	21.69	A2
		6059.3	2553.00	19.05	1016	226.9	241.4	255.9	307813.6	5.32	6.61	
61-2750	OZ	112.9	108.28	0.75	42	44.9	47.7	50.4	2370.1	17.70	22.22	A1
		6067.9	2750.20	19.05	1066	219.3	232.7	246.2	323659.7	5.40	6.77	
61-2953	OZ	113.1	116.28	0.562	50	38.4	40.9	43.5	2827.7	18.75	24.31	A1
		6081.1	2953.40	14.288	1270	187.4	199.9	212.4	386151.6	5.71	7.41	
61-2547	OZ	113.4	100.28	1	34	54.5	58.6	62.7	1928.4	17.77	21.17	A3
		6098.6	2547.00	25.4	863	266.2	286.2	306.2	263338.4	5.42	6.45	
61-2401	OZ	113.4	94.51	1	34	54.3	57.4	60.6	1928.6	16.66	20.12	A2
		6099.4	2400.60	25.4	863	264.9	280.3	295.7	263372.9	5.08	6.13	
61-2756	OZ	113.6	108.51	0.562	48	39.8	42.5	45.3	2725.8	18.49	23.79	A2
		6106.1	2756.20	14.288	1219	194.3	207.7	221.1	372226.6	5.64	7.25	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
61-3055	OZ	113.7	120.28	0.5	53	36.0	38.4	40.9	3070.5	19.27	25.36	A1
		6114.2	3055.00	12.7	1371	175.6	187.7	199.8	419309.3	5.87	7.73	
61-3106	OZ	113.8	122.28	0.472	56	34.8	37.3	39.7	3186.8	19.54	25.88	A1
		6119.0	3105.80	12	1422	170.1	182.0	193.9	435185.8	5.95	7.89	
61-2750	OZ	113.9	108.28	0.709	42	46.1	49.8	53.6	2392.4	18.82	23.27	A3
		6124.9	2750.20	18	1066	224.9	243.4	261.9	326701.6	5.74	7.09	
62-2858	OZ	114.4	112.51	0.5	52	37.3	40.0	42.6	2974.3	19.01	24.83	A2
		6150.2	2857.80	12.7	1320	182.2	195.1	208.0	406162.1	5.79	7.57	
62-2598	OZ	114.4	102.28	1	36	52.6	55.6	58.5	2059.9	16.92	20.65	A1
		6152.7	2597.80	25.4	914	257.1	271.3	285.5	281303.3	5.16	6.29	
62-2598	OZ	114.4	102.28	1	36	52.6	55.6	58.5	2059.9	16.92	20.65	A1
		6152.7	2597.80	25.4	914	257.1	271.3	285.5	281303.4	5.16	6.29	
62-2909	OZ	114.6	114.51	0.472	53	36.1	38.7	41.3	3093.5	19.27	25.36	A2
		6160.0	2908.60	12	1371	176.5	189.2	201.9	422450.7	5.87	7.73	
62-2604	OZ	115.2	102.51	0.709	42	45.3	48.3	51.2	2418.7	17.70	22.22	A2
		6192.3	2603.80	18	1066	221.4	235.6	249.8	330296.0	5.40	6.77	
63-2598	OZ	116.5	102.28	0.938	36	53.3	57.3	61.3	2096.6	18.03	21.70	A3
		6262.3	2597.80	23.812	914	260.2	279.8	299.4	286313.4	5.50	6.61	
63-2699	OZ	116.5	106.28	0.787	40	48.9	52.7	56.6	2330.6	18.56	22.74	A3
		6264.9	2699.40	20	1016	238.6	257.5	276.4	318257.4	5.66	6.93	
63-2451	OZ	117.1	96.51	0.938	36	53.0	56.1	59.1	2106.9	16.92	20.65	A2
		6293.1	2451.40	23.812	914	258.6	273.7	288.7	287719.3	5.16	6.29	
63-2903	OZ	117.3	114.28	0.625	48	41.1	43.7	46.3	2815.0	18.49	23.79	A1
		6306.1	2902.60	15.875	1219	200.5	213.2	226.0	384417.4	5.64	7.25	
63-2553	OZ	117.7	100.51	0.787	40	48.3	51.3	54.2	2353.8	17.44	21.69	A2
		6327.5	2553.00	20	1016	235.9	250.3	264.8	321439.1	5.32	6.61	
63-2649	OZ	117.9	104.28	0.938	38	51.3	54.2	57.0	2239.6	17.18	21.17	A1
		6337.2	2648.60	23.812	965	250.6	264.6	278.5	305831.4	5.24	6.45	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
63-2750	OZ	118.0	108.28	0.787	42	46.7	49.5	52.2	2477.9	17.70	22.22	A1
		6343.9	2750.20	20	1066	228.1	241.5	254.9	338385.6	5.40	6.77	
64-3106	OZ	118.3	122.28	0.472	56	37.6	41.0	44.3	3312.7	20.65	26.93	A3
		6360.7	3105.80	12	1422	183.6	200.0	216.4	452376.2	6.29	8.21	
64-2801	OZ	118.4	110.28	0.688	43	45.8	49.5	53.3	2604.1	19.08	23.79	A3
		6364.0	2801.00	17.462	1117	223.7	241.9	260.1	355618.4	5.82	7.25	
64-2953	OZ	118.4	116.28	0.562	50	41.3	44.8	48.3	2960.1	19.87	25.36	A3
		6365.8	2953.40	14.288	1270	201.6	218.8	236.1	404229.0	6.05	7.73	
64-3055	OZ	118.5	120.28	0.5	53	38.8	42.2	45.6	3198.5	20.39	26.41	A3
		6369.0	3055.00	12.7	1371	189.3	206.0	222.7	436785.6	6.21	8.05	
64-2649	OZ	118.6	104.28	0.875	38	51.8	55.7	59.7	2253.3	18.29	22.22	A3
		6376.1	2648.60	22.225	965	252.8	272.1	291.3	307710.9	5.58	6.77	
64-2502	OZ	119.6	98.51	0.875	38	51.4	54.4	57.4	2272.6	17.18	21.17	A2
		6430.6	2502.20	22.225	965	250.9	265.6	280.4	310340.1	5.24	6.45	
64-2750	OZ	119.6	108.28	0.75	42	48.0	51.8	55.6	2512.3	18.82	23.27	A3
		6431.8	2750.20	19.05	1066	234.6	253.1	271.6	343072.9	5.74	7.09	
64-2699	OZ	119.7	106.28	0.812	40	50.0	53.9	57.8	2393.6	18.56	22.74	A3
		6434.3	2699.40	20.638	1016	244.3	263.2	282.0	326862.6	5.66	6.93	
65-2655	OZ	120.1	104.51	0.688	43	45.1	48.0	50.8	2641.6	17.96	22.74	A2
		6455.6	2654.60	17.462	1117	220.2	234.2	248.1	360738.7	5.48	6.93	
65-3004	OZ	120.1	118.28	0.562	52	38.9	41.5	44.0	3122.1	19.01	24.83	A1
		6455.9	3004.20	14.288	1320	190.1	202.5	214.8	426346.4	5.79	7.57	
65-3106	OZ	120.1	122.28	0.5	56	36.4	38.9	41.3	3363.8	19.54	25.88	A1
		6458.9	3105.80	12.7	1422	177.9	189.8	201.7	459353.5	5.95	7.89	
65-2699	OZ	120.2	106.28	0.875	40	49.7	52.5	55.4	2404.6	17.44	21.69	A1
		6463.9	2699.40	22.225	1016	242.9	256.6	270.3	328367.0	5.32	6.61	
65-2807	OZ	120.6	110.51	0.562	50	40.4	43.1	45.8	3014.1	18.75	24.31	A2
		6482.0	2807.00	14.288	1270	197.1	210.3	223.5	411606.7	5.71	7.41	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
65-2959	OZ	120.8	116.51	0.472	56	36.6	39.1	41.7	3381.4	19.54	25.88	A2
		6492.6	2959.40	12	1422	178.5	191.0	203.5	461755.8	5.95	7.89	
65-2909	OZ	120.8	114.51	0.5	53	37.8	40.4	43.0	3262.7	19.27	25.36	A2
		6496.7	2908.60	12.7	1371	184.5	197.2	209.9	445544.2	5.87	7.73	
65-2553	OZ	121.0	100.51	0.812	40	49.5	52.5	55.5	2420.5	17.44	21.69	A2
		6506.6	2553.00	20.638	1016	241.9	256.3	270.8	330537.8	5.32	6.61	
65-2604	OZ	121.2	102.51	0.75	42	47.4	50.4	53.3	2545.3	17.70	22.22	A2
		6516.5	2603.80	19.05	1066	231.6	245.8	260.0	347587.8	5.40	6.77	
65-2801	OZ	121.4	110.28	0.75	43	45.8	48.6	51.3	2670.5	17.96	22.74	A1
		6526.1	2801.00	19.05	1117	223.8	237.0	250.2	364679.0	5.48	6.93	
65-2750	OZ	121.4	108.28	0.812	42	47.9	50.7	53.4	2550.0	17.70	22.22	A1
		6528.3	2750.20	20.638	1066	233.9	247.4	260.8	348221.6	5.40	6.77	
66-2598	OZ	122.8	102.28	1	36	56.0	60.0	64.0	2210.4	18.03	21.70	A3
		6602.3	2597.80	25.4	914	273.2	292.8	312.4	301855.3	5.50	6.61	
66-2598	OZ	122.8	102.28	1	36	56.0	60.0	64.0	2210.4	18.03	21.70	A3
		6602.3	2597.80	25.4	914	273.2	292.8	312.4	301855.4	5.50	6.61	
66-2903	OZ	122.9	114.28	0.625	48	44.0	47.6	51.2	2949.7	19.60	24.84	A3
		6607.8	2902.60	15.875	1219	215.0	232.5	250.1	402811.3	5.98	7.57	
67-2451	OZ	123.8	96.51	1	36	55.8	58.9	62.0	2227.5	16.92	20.65	A2
		6653.3	2451.40	25.4	914	272.4	287.5	302.6	304189.4	5.16	6.29	
67-2451	OZ	123.8	96.51	1	36	55.8	58.9	62.0	2227.5	16.92	20.65	A2
		6653.3	2451.40	25.4	914	272.4	287.5	302.6	304189.4	5.16	6.29	
67-3106	OZ	124.6	122.28	0.5	56	39.2	42.6	45.9	3489.7	20.65	26.93	A3
		6700.6	3105.80	12.7	1422	191.4	207.8	224.2	476543.9	6.29	8.21	
67-2750	OZ	124.8	108.28	0.787	42	49.8	53.6	57.4	2620.1	18.82	23.27	A3
		6707.9	2750.20	20	1066	243.3	261.8	280.4	357798.7	5.74	7.09	
67-2649	OZ	124.8	104.28	1	38	54.1	57.0	59.8	2372.0	17.18	21.17	A1
		6712.0	2648.60	25.4	965	264.1	278.1	292.0	323920.9	5.24	6.45	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
67-2953	OZ	124.9	116.28	0.625	50	41.7	44.3	46.9	3122.3	18.75	24.31	A1
		6714.7	2953.40	15.875	1270	203.8	216.3	228.8	426383.2	5.71	7.41	
67-3004	OZ	125.1	118.28	0.562	52	41.8	45.3	48.8	3252.2	20.13	25.88	A3
		6725.0	3004.20	14.288	1320	204.1	221.1	238.0	444118.2	6.13	7.89	
67-2756	OZ	125.2	108.51	0.625	48	43.2	46.0	48.7	3004.2	18.49	23.79	A2
		6729.8	2756.20	15.875	1219	211.2	224.6	238.0	410249.6	5.64	7.25	
68-2649	OZ	125.6	104.28	0.938	38	54.6	58.5	62.4	2387.2	18.29	22.22	A3
		6754.9	2648.60	23.812	965	266.4	285.7	304.9	325989.2	5.58	6.77	
68-2604	OZ	126.6	102.51	0.787	42	49.3	52.2	55.2	2659.2	17.70	22.22	A2
		6808.1	2603.80	20	1066	240.9	255.1	269.3	363141.6	5.40	6.77	
68-2502	OZ	127.1	98.51	0.938	38	54.3	57.4	60.4	2414.3	17.18	21.17	A2
		6831.5	2502.20	23.812	965	265.3	280.0	294.8	329687.9	5.24	6.45	
68-3055	OZ	127.2	120.28	0.562	53	39.5	42.0	44.5	3433.8	19.27	25.36	A1
		6837.5	3055.00	14.288	1371	192.8	204.9	217.0	468916.5	5.87	7.73	
68-2959	OZ	127.4	116.51	0.5	56	38.2	40.8	43.3	3567.1	19.54	25.88	A2
		6849.3	2959.40	12.7	1422	186.7	199.2	211.6	487119.0	5.95	7.89	
69-2699	OZ	127.5	106.28	0.875	40	52.9	56.8	60.7	2549.4	18.56	22.74	A3
		6853.3	2699.40	22.225	1016	258.4	277.3	296.1	348145.5	5.66	6.93	
69-2858	OZ	127.7	112.51	0.562	52	40.9	43.6	46.2	3320.2	19.01	24.83	A2
		6865.7	2857.80	14.288	1320	199.9	212.8	225.8	453408.2	5.79	7.57	
69-2801	OZ	127.7	110.28	0.75	43	48.9	52.6	56.4	2810.1	19.08	23.79	A3
		6867.2	2801.00	19.05	1117	238.8	257.0	275.2	383740.1	5.82	7.25	
69-2699	OZ	127.9	106.28	0.938	40	52.6	55.4	58.2	2558.9	17.44	21.69	A1
		6878.8	2699.40	23.812	1016	256.9	270.6	284.3	349442.5	5.32	6.61	
69-2750	OZ	128.2	108.28	0.812	42	51.0	54.8	58.6	2692.1	18.82	23.27	A3
		6892.3	2750.20	20.638	1066	249.2	267.7	286.2	367634.7	5.74	7.09	
69-2903	OZ	128.2	114.28	0.688	48	44.3	47.0	49.6	3077.3	18.49	23.79	A1
		6893.6	2902.60	17.462	1219	216.5	229.2	242.0	420233.6	5.64	7.25	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
69-2553	OZ	129.3	100.51	0.875	40	52.6	55.6	58.5	2585.3	17.44	21.69	A2
		6949.6	2553.00	22.225	1016	256.8	271.3	285.7	353041.1	5.32	6.61	
70-2750	OZ	129.9	108.28	0.875	42	50.9	53.6	56.4	2728.2	17.70	22.22	A1
		6984.6	2750.20	22.225	1066	248.5	261.9	275.4	372556.5	5.40	6.77	
70-2655	OZ	130.0	104.51	0.75	43	48.4	51.2	54.1	2858.9	17.96	22.74	A2
		6986.6	2654.60	19.05	1117	236.2	250.1	264.0	390411.4	5.48	6.93	
70-2953	OZ	130.2	116.28	0.625	50	44.6	48.2	51.7	3254.7	19.87	25.36	A3
		6999.4	2953.40	15.875	1270	218.0	235.2	252.5	444460.6	6.05	7.73	
70-2604	OZ	130.3	102.51	0.812	42	50.6	53.5	56.4	2735.3	17.70	22.22	A2
		7002.8	2603.80	20.638	1066	247.1	261.3	275.5	373530.6	5.40	6.77	
70-2801	OZ	130.7	110.28	0.812	43	48.9	51.6	54.3	2874.6	17.96	22.74	A1
		7024.9	2801.00	20.638	1117	238.9	252.1	265.3	392552.7	5.48	6.93	
71-3055	OZ	131.9	120.28	0.562	53	42.3	45.7	49.1	3561.8	20.39	26.41	A3
		7092.3	3055.00	14.288	1371	206.6	223.3	239.9	486392.8	6.21	8.05	
71-2649	OZ	132.6	104.28	1	38	57.3	61.3	65.2	2519.6	18.29	22.22	A3
		7129.7	2648.60	25.4	965	280.0	299.2	318.4	344078.8	5.58	6.77	
71-3004	OZ	132.6	118.28	0.625	52	42.4	44.9	47.4	3448.7	19.01	24.83	A1
		7131.4	3004.20	15.875	1320	207.0	219.3	231.6	470957.3	5.79	7.57	
71-2807	OZ	133.0	110.51	0.625	50	43.9	46.6	49.3	3324.1	18.75	24.31	A2
		7148.6	2807.00	15.875	1270	214.4	227.6	240.8	453936.6	5.71	7.41	
72-3207	OZ	133.3	126.28	0.5	60	37.3	39.7	42.0	3997.8	20.06	26.93	A1
		7164.6	3207.40	12.7	1524	182.2	193.7	205.2	545940.6	6.11	8.21	
72-2903	OZ	133.8	114.28	0.688	48	47.3	50.9	54.5	3212.0	19.60	24.84	A3
		7195.3	2902.60	17.462	1219	231.0	248.5	266.1	438627.4	5.98	7.57	
72-3106	OZ	134.4	122.28	0.562	56	40.0	42.5	44.9	3763.1	19.54	25.88	A1
		7225.7	3105.80	14.288	1422	195.5	207.4	219.3	513890.1	5.95	7.89	
72-2502	OZ	134.4	98.51	1	38	57.3	60.3	63.3	2554.5	17.18	21.17	A2
		7228.3	2502.20	25.4	965	279.6	294.4	309.1	348835.8	5.24	6.45	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
73-2909	OZ	135.0	114.51	0.562	53	41.5	44.1	46.7	3644.2	19.27	25.36	A2
		7256.5	2908.60	14.288	1371	202.6	215.3	228.0	497648.4	5.87	7.73	
73-2699	OZ	135.2	106.28	0.938	40	55.8	59.7	63.5	2703.7	18.56	22.74	A3
		7268.1	2699.40	23.812	1016	272.5	291.3	310.2	369220.9	5.66	6.93	
73-2699	OZ	135.6	106.28	1	40	55.5	58.3	61.1	2711.7	17.44	21.69	A1
		7289.6	2699.40	25.4	1016	271.0	284.6	298.3	370311.2	5.32	6.61	
73-2699	OZ	135.6	106.28	1	40	55.5	58.3	61.1	2711.7	17.44	21.69	A1
		7289.6	2699.40	25.4	1016	271.0	284.6	298.3	370311.4	5.32	6.61	
73-2953	OZ	136.6	116.28	0.688	50	45.1	47.7	50.2	3414.7	18.75	24.31	A1
		7343.4	2953.40	17.462	1270	220.2	232.7	245.2	466303.2	5.71	7.41	
73-2750	OZ	136.7	108.28	0.875	42	54.0	57.8	61.6	2870.3	18.82	23.27	A3
		7348.5	2750.20	22.225	1066	263.8	282.3	300.8	391969.7	5.74	7.09	
73-2756	OZ	136.7	108.51	0.688	48	46.7	49.4	52.2	3280.4	18.49	23.79	A2
		7348.6	2756.20	17.462	1219	228.0	241.4	254.8	447968.2	5.64	7.25	
74-2801	OZ	137.0	110.28	0.812	43	52.0	55.7	59.5	3014.2	19.08	23.79	A3
		7366.0	2801.00	20.638	1117	253.9	272.1	290.3	411613.7	5.82	7.25	
74-3207	OZ	137.3	126.28	0.5	60	40.0	43.2	46.5	4119.7	21.17	27.98	A3
		7383.0	3207.40	12.7	1524	195.2	211.1	227.0	562586.5	6.45	8.53	
74-2553	OZ	137.4	100.51	0.938	40	55.6	58.6	61.6	2748.4	17.44	21.69	A2
		7388.3	2553.00	23.812	1016	271.7	286.1	300.6	375325.1	5.32	6.61	
74-3004	OZ	137.6	118.28	0.625	52	45.3	48.7	52.2	3578.9	20.13	25.88	A3
		7400.5	3004.20	15.875	1320	220.9	237.9	254.8	488729.1	6.13	7.89	
74-2750	OZ	138.3	108.28	0.938	42	53.9	56.6	59.4	2904.7	17.70	22.22	A1
		7436.6	2750.20	23.812	1066	263.0	276.5	289.9	396665.7	5.40	6.77	
75-3106	OZ	138.9	122.28	0.562	56	42.8	46.2	49.5	3889.0	20.65	26.93	A3
		7467.4	3105.80	14.288	1422	209.0	225.4	241.8	531080.6	6.29	8.21	
75-2903	OZ	139.1	114.28	0.75	48	47.6	50.2	52.8	3337.5	18.49	23.79	A1
		7476.4	2902.60	19.05	1219	232.5	245.2	257.9	455763.8	5.64	7.25	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	
75-2604	OZ	139.2	102.51	0.875	42	53.8	56.7	59.6	2923.5	17.70	22.22	A2
		7484.7	2603.80	22.225	1066	262.5	276.7	290.9	399233.8	5.40	6.77	
75-2655	OZ	139.7	104.51	0.812	43	51.6	54.5	57.3	3074.3	17.96	22.74	A2
		7512.9	2654.60	20.638	1117	252.1	266.0	279.9	419822.2	5.48	6.93	
75-2801	OZ	139.9	110.28	0.875	43	52.0	54.7	57.4	3076.9	17.96	22.74	A1
		7519.4	2801.00	22.225	1117	253.9	267.1	280.3	420182.1	5.48	6.93	
76-3055	OZ	140.5	120.28	0.625	53	43.0	45.5	48.0	3794.5	19.27	25.36	A1
		7555.8	3055.00	15.875	1371	210.0	222.1	234.2	518173.5	5.87	7.73	
76-3061	OZ	140.8	120.51	0.5	60	39.1	41.6	44.0	4224.7	20.06	26.93	A2
		7571.2	3061.00	12.7	1524	190.9	202.9	215.0	576925.8	6.11	8.21	
76-2858	OZ	140.9	112.51	0.625	52	44.6	47.2	49.9	3663.7	19.01	24.83	A2
		7575.8	2857.80	15.875	1320	217.6	230.5	243.4	500304.4	5.79	7.57	
76-2953	OZ	141.9	116.28	0.688	50	48.0	51.5	55.1	3547.0	19.87	25.36	A3
		7628.0	2953.40	17.462	1270	234.4	251.6	268.9	484380.7	6.05	7.73	
77-2959	OZ	142.4	116.51	0.562	56	42.0	44.6	47.1	3986.2	19.54	25.88	A2
		7654.0	2959.40	14.288	1422	205.1	217.6	230.1	544353.6	5.95	7.89	
77-2699	OZ	142.8	106.28	1	40	58.7	62.5	66.4	2856.6	18.56	22.74	A3
		7678.9	2699.40	25.4	1016	286.5	305.4	324.2	390089.6	5.66	6.93	
77-2699	OZ	142.8	106.28	1	40	58.7	62.5	66.4	2856.6	18.56	22.74	A3
		7678.9	2699.40	25.4	1016	286.5	305.4	324.2	390089.8	5.66	6.93	
78-2903	OZ	144.7	114.28	0.75	48	50.6	54.2	57.8	3472.2	19.60	24.84	A3
		7778.2	2902.60	19.05	1219	246.9	264.5	282.0	474157.7	5.98	7.57	
78-2750	OZ	145.1	108.28	0.938	42	57.0	60.8	64.6	3046.9	18.82	23.27	A3
		7800.5	2750.20	23.812	1066	278.3	296.8	315.3	416078.8	5.74	7.09	
78-3004	OZ	145.1	118.28	0.688	52	45.8	48.3	50.9	3773.0	19.01	24.83	A1
		7802.0	3004.20	17.462	1320	223.7	236.1	248.4	515242.0	5.79	7.57	
78-2807	OZ	145.3	110.51	0.688	50	47.5	50.1	52.8	3631.7	18.75	24.31	A2
		7810.1	2807.00	17.462	1270	231.7	244.8	258.0	495938.7	5.71	7.41	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in ³ /ft (cm ³ /m)	in (mm)	in (mm)		in (mm)	lb/ft ² (kg/m ²)	
78-3055	OZ	145.3	120.28	0.625	53	45.8	49.2	52.7	3922.5	20.39	26.41	A3
		7810.6	3055.00	15.875	1371	223.8	240.4	257.1	535649.8	6.21	8.05	
78-2553	OZ	145.5	100.51	1	40	58.7	61.6	64.6	2910.0	17.44	21.69	A2
		7822.6	2553.00	25.4	1016	286.5	301.0	315.4	397390.5	5.32	6.61	
78-2553	OZ	145.5	100.51	1	40	58.7	61.6	64.6	2910.0	17.44	21.69	A2
		7822.7	2553.00	25.4	1016	286.5	301.0	315.4	397390.7	5.32	6.61	
79-2801	OZ	146.2	110.28	0.875	43	55.1	58.8	62.5	3216.5	19.08	23.79	A3
		7860.5	2801.00	22.225	1117	268.9	287.1	305.3	439243.1	5.82	7.25	
79-2750	OZ	146.6	108.28	1	42	56.8	59.6	62.3	3079.6	17.70	22.22	A1
		7884.3	2750.20	25.4	1066	277.5	291.0	304.4	420551.0	5.40	6.77	
79-2750	OZ	146.6	108.28	1	42	56.8	59.6	62.3	3079.6	17.70	22.22	A1
		7884.4	2750.20	25.4	1066	277.5	291.0	304.4	420551.2	5.40	6.77	
80-2604	OZ	148.1	102.51	0.938	42	56.9	59.8	62.7	3110.0	17.70	22.22	A2
		7962.1	2603.80	23.812	1066	277.8	292.0	306.2	424698.5	5.40	6.77	
80-2756	OZ	148.1	108.51	0.75	48	50.1	52.9	55.6	3554.4	18.49	23.79	A2
		7962.4	2756.20	19.05	1219	244.8	258.2	271.6	485385.7	5.64	7.25	
80-2953	OZ	148.2	116.28	0.75	50	48.4	51.0	53.6	3704.8	18.75	24.31	A1
		7967.2	2953.40	19.05	1270	236.5	249.1	261.6	505918.6	5.71	7.41	
80-3106	OZ	148.6	122.28	0.625	56	43.6	46.1	48.5	4159.8	19.54	25.88	A1
		7987.3	3105.80	15.875	1422	213.0	224.9	236.8	568059.8	5.95	7.89	
80-2801	OZ	149.0	110.28	0.938	43	55.1	57.8	60.5	3277.5	17.96	22.74	A1
		8009.5	2801.00	23.812	1117	268.9	282.1	295.3	447568.7	5.48	6.93	
80-2909	OZ	149.0	114.51	0.625	53	45.2	47.8	50.4	4023.1	19.27	25.36	A2
		8010.9	2908.60	15.875	1371	220.6	233.3	246.0	549384.6	5.87	7.73	
80-3207	OZ	149.2	126.28	0.562	60	41.1	43.4	45.8	4475.3	20.06	26.93	A1
		8020.3	3207.40	14.288	1524	200.4	212.0	223.5	611146.1	6.11	8.21	
80-2655	OZ	149.4	104.51	0.875	43	54.9	57.7	60.6	3287.8	17.96	22.74	A2
		8034.6	2654.60	22.225	1117	267.9	281.9	295.8	448975.4	5.48	6.93	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
80-2763	OZ	149.5	108.78	1	42	57.2	59.9	62.6	3176.1	17.77	22.35	A1
		8035.6	2762.90	25.4	1079	279.1	292.5	305.9	433720.8	5.42	6.81	
81-2903	OZ	149.8	114.28	0.812	48	50.9	53.5	56.1	3595.6	18.49	23.79	A1
		8054.6	2902.60	20.638	1219	248.4	261.1	273.8	491008.1	5.64	7.25	
81-3004	OZ	150.1	118.28	0.688	52	48.7	52.2	55.6	3903.2	20.13	25.88	A3
		8071.1	3004.20	17.462	1320	237.7	254.7	271.6	533013.8	6.13	7.89	
82-3106	OZ	153.1	122.28	0.625	56	46.4	49.8	53.1	4285.7	20.65	26.93	A3
		8229.1	3105.80	15.875	1422	226.5	242.9	259.3	585250.2	6.29	8.21	
82-3207	OZ	153.2	126.28	0.562	60	43.7	47.0	50.2	4597.2	21.17	27.98	A3
		8238.7	3207.40	14.288	1524	213.5	229.4	245.3	627792.0	6.45	8.53	
82-2750	OZ	153.4	108.28	1	42	60.0	63.8	67.6	3221.8	18.82	23.27	A3
		8248.3	2750.20	25.4	1066	292.8	311.3	329.8	439964.1	5.74	7.09	
82-2750	OZ	153.4	108.28	1	42	60.0	63.8	67.6	3221.8	18.82	23.27	A3
		8248.3	2750.20	25.4	1066	292.8	311.3	329.8	439964.4	5.74	7.09	
83-2953	OZ	153.5	116.28	0.75	50	51.4	54.9	58.4	3837.1	19.87	25.36	A3
		8251.9	2953.40	19.05	1270	250.7	268.0	285.2	523996.1	6.05	7.73	
83-3055	OZ	153.8	120.28	0.688	53	46.5	49.0	51.5	4152.7	19.27	25.36	A1
		8268.9	3055.00	17.462	1371	227.2	239.3	251.4	567083.5	5.87	7.73	
83-2858	OZ	154.0	112.51	0.688	52	48.2	50.8	53.5	4004.6	19.01	24.83	A2
		8280.7	2857.80	17.462	1320	235.2	248.1	261.1	546857.7	5.79	7.57	
84-2801	OZ	155.3	110.28	0.938	43	58.1	61.9	65.6	3417.1	19.08	23.79	A3
		8350.6	2801.00	23.812	1117	283.9	302.1	320.3	466629.8	5.82	7.25	
84-2903	OZ	155.4	114.28	0.812	48	53.8	57.4	61.0	3730.3	19.60	24.84	A3
		8356.3	2902.60	20.638	1219	262.8	280.4	297.9	509401.9	5.98	7.57	
84-2763	OZ	156.1	108.78	1	42	60.3	64.1	67.8	3317.6	18.88	23.40	A3
		8393.6	2762.90	25.4	1079	294.3	312.7	331.2	453044.7	5.76	7.13	
84-2604	OZ	156.9	102.51	1	42	60.0	62.9	65.9	3294.7	17.70	22.22	A2
		8435.1	2603.80	25.4	1066	293.1	307.3	321.5	449926.8	5.40	6.77	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
84-2604	OZ	156.9	102.51	1	42	60.0	62.9	65.9	3294.7	17.70	22.22	A2
		8435.1	2603.80	25.4	1066	293.1	307.3	321.5	449927.0	5.40	6.77	
85-2959	OZ	157.2	116.51	0.625	56	45.8	48.3	50.9	4402.5	19.54	25.88	A2
		8453.4	2959.40	15.875	1422	223.5	236.0	248.5	601202.9	5.95	7.89	
85-2807	OZ	157.5	110.51	0.75	50	51.0	53.7	56.4	3936.9	18.75	24.31	A2
		8466.5	2807.00	19.05	1270	248.9	262.0	275.2	537620.2	5.71	7.41	
85-3004	OZ	157.5	118.28	0.75	52	49.3	51.8	54.3	4094.9	19.01	24.83	A1
		8467.6	3004.20	19.05	1320	240.5	252.8	265.1	559200.5	5.79	7.57	
85-3061	OZ	157.5	120.51	0.562	60	43.0	45.5	48.0	4725.1	20.06	26.93	A2
		8467.8	3061.00	14.288	1524	210.0	222.1	234.2	645249.9	6.11	8.21	
85-2801	OZ	158.0	110.28	1	43	58.1	60.8	63.5	3476.2	17.96	22.74	A1
		8495.2	2801.00	25.4	1117	283.8	297.0	310.2	474709.0	5.48	6.93	
85-3055	OZ	158.5	120.28	0.688	53	49.3	52.8	56.2	4280.6	20.39	26.41	A3
		8523.8	3055.00	17.462	1371	240.9	257.6	274.3	584559.7	6.21	8.05	
86-2655	OZ	159.1	104.51	0.938	43	58.1	61.0	63.8	3499.4	17.96	22.74	A2
		8551.8	2654.60	23.812	1117	283.7	297.7	311.6	477872.4	5.48	6.93	
86-2756	OZ	159.4	108.51	0.812	48	53.6	56.3	59.1	3826.2	18.49	23.79	A2
		8571.2	2756.20	20.638	1219	261.6	275.0	288.4	522502.0	5.64	7.25	
86-2953	OZ	159.7	116.28	0.812	50	51.8	54.4	56.9	3992.6	18.75	24.31	A1
		8586.3	2953.40	20.638	1270	252.8	265.4	277.9	545229.2	5.71	7.41	
86-2617	OZ	159.8	103.01	1	42	60.4	63.3	66.2	3395.5	17.77	22.35	A2
		8590.8	2616.50	25.4	1079	294.7	308.9	323.0	463690.8	5.42	6.81	
86-2903	OZ	160.5	114.28	0.875	48	54.1	56.7	59.3	3851.6	18.49	23.79	A1
		8628.1	2902.60	22.225	1219	264.2	277.0	289.7	525969.8	5.64	7.25	
87-3004	OZ	162.5	118.28	0.75	52	52.1	55.6	59.1	4225.1	20.13	25.88	A3
		8736.7	3004.20	19.05	1320	254.4	271.4	288.4	576972.2	6.13	7.89	
87-3106	OZ	162.6	122.28	0.688	56	47.2	49.7	52.1	4553.8	19.54	25.88	A1
		8743.8	3105.80	17.462	1422	230.5	242.4	254.3	621855.9	5.95	7.89	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	
88-2909	OZ	162.9	114.51	0.688	53	48.9	51.5	54.1	4399.2	19.27	25.36	A2
		8759.9	2908.60	17.462	1371	238.6	251.3	264.0	600756.4	5.87	7.73	
88-2801	OZ	164.4	110.28	1	43	61.2	64.9	68.7	3615.8	19.08	23.79	A3
		8836.3	2801.00	25.4	1117	298.8	317.0	335.2	493770.1	5.82	7.25	
89-3207	OZ	165.0	126.28	0.625	60	44.8	47.1	49.5	4949.8	20.06	26.93	A1
		8870.6	3207.40	15.875	1524	218.7	230.2	241.7	675940.0	6.11	8.21	
89-2953	OZ	165.0	116.28	0.812	50	54.7	58.2	61.8	4125.0	19.87	25.36	A3
		8871.0	2953.40	20.638	1270	267.1	284.3	301.6	563306.7	6.05	7.73	
89-2928	OZ	165.6	115.28	0.875	48	54.6	57.2	59.8	4057.4	18.62	24.05	A1
		8903.6	2928.00	22.225	1244	266.7	279.3	291.9	554070.3	5.68	7.33	
89-2903	OZ	166.1	114.28	0.875	48	57.1	60.7	64.3	3986.3	19.60	24.84	A3
		8929.9	2902.60	22.225	1219	278.7	296.2	313.8	544363.7	5.98	7.57	
90-3055	OZ	167.0	120.28	0.75	53	50.0	52.5	55.0	4508.3	19.27	25.36	A1
		8977.0	3055.00	19.05	1371	244.3	256.4	268.5	615643.2	5.87	7.73	
90-2858	OZ	167.0	112.51	0.75	52	51.8	54.4	57.1	4342.9	19.01	24.83	A2
		8980.4	2857.80	19.05	1320	252.8	265.7	278.7	593068.1	5.79	7.57	
90-3106	OZ	167.1	122.28	0.688	56	50.0	53.3	56.7	4679.6	20.65	26.93	A3
		8985.5	3105.80	17.462	1422	244.0	260.4	276.8	639046.3	6.29	8.21	
91-2655	OZ	168.6	104.51	1	43	61.3	64.2	67.0	3709.1	17.96	22.74	A2
		9064.2	2654.60	25.4	1117	299.5	313.4	327.3	506509.5	5.48	6.93	
91-3207	OZ	169.1	126.28	0.625	60	47.5	50.7	54.0	5071.7	21.17	27.98	A3
		9089.1	3207.40	15.875	1524	231.7	247.6	263.5	692585.9	6.45	8.53	
91-2807	OZ	169.6	110.51	0.812	50	54.5	57.2	59.9	4239.8	18.75	24.31	A2
		9117.8	2807.00	20.638	1270	266.0	279.2	292.4	578981.1	5.71	7.41	
91-3004	OZ	169.8	118.28	0.812	52	52.7	55.2	57.7	4414.5	19.01	24.83	A1
		9128.3	3004.20	20.638	1320	257.2	269.5	281.8	602832.7	5.79	7.57	
92-2756	OZ	170.7	108.51	0.875	48	57.0	59.7	62.5	4095.8	18.49	23.79	A2
		9175.2	2756.20	22.225	1219	278.3	291.7	305.1	559320.8	5.64	7.25	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
92-2928	OZ	171.1	115.28	0.875	48	57.6	61.1	64.7	4190.9	19.73	25.10	A3
		9196.6	2928.00	22.225	1244	281.0	298.4	315.8	572304.6	6.02	7.65	
92-2903	OZ	171.1	114.28	0.938	48	57.4	60.0	62.6	4105.5	18.49	23.79	A1
		9197.0	2902.60	23.812	1219	280.1	292.8	305.5	560649.1	5.64	7.25	
92-2953	OZ	171.1	116.28	0.875	50	55.1	57.7	60.2	4278.3	18.75	24.31	A1
		9200.6	2953.40	22.225	1270	269.1	281.6	294.1	584235.1	5.71	7.41	
92-3055	OZ	171.7	120.28	0.75	53	52.8	56.3	59.7	4636.2	20.39	26.41	A3
		9231.8	3055.00	19.05	1371	258.0	274.7	291.4	633119.5	6.21	8.05	
92-2959	OZ	172.0	116.51	0.688	56	49.5	52.1	54.7	4815.9	19.54	25.88	A2
		9247.2	2959.40	17.462	1422	241.9	254.4	266.9	657660.3	5.95	7.89	
94-3061	OZ	174.1	120.51	0.625	60	46.9	49.4	51.9	5222.2	20.06	26.93	A2
		9358.8	3061.00	15.875	1524	229.1	241.2	253.3	713142.8	6.11	8.21	
94-3004	OZ	174.8	118.28	0.812	52	55.5	59.0	62.5	4544.6	20.13	25.88	A3
		9397.4	3004.20	20.638	1320	271.1	288.1	305.1	620604.5	6.13	7.89	
95-2782	OZ	175.9	109.51	0.875	48	57.5	60.2	62.9	4310.2	18.62	24.05	A2
		9458.4	2781.60	22.225	1244	280.7	294.0	307.3	588595.7	5.68	7.33	
95-2979	OZ	176.3	117.28	0.875	51	55.6	58.1	60.7	4496.8	18.88	24.57	A1
		9481.0	2978.80	22.225	1295	271.5	283.9	296.3	614084.1	5.75	7.49	
95-2953	OZ	176.4	116.28	0.875	50	58.0	61.6	65.1	4410.6	19.87	25.36	A3
		9485.2	2953.40	22.225	1270	283.3	300.6	317.8	602312.6	6.05	7.73	
95-3106	OZ	176.6	122.28	0.75	56	50.8	53.2	55.7	4945.0	19.54	25.88	A1
		9495.1	3105.80	19.05	1422	248.0	259.9	271.8	675288.2	5.95	7.89	
95-2903	OZ	176.7	114.28	0.938	48	60.3	63.9	67.5	4240.2	19.60	24.84	A3
		9498.7	2902.60	23.812	1219	294.5	312.1	329.6	579042.9	5.98	7.57	
95-2909	OZ	176.8	114.51	0.75	53	52.6	55.2	57.8	4772.7	19.27	25.36	A2
		9503.6	2908.60	19.05	1371	256.6	269.3	282.0	651760.3	5.87	7.73	
97-2858	OZ	180.0	112.51	0.812	52	55.4	58.0	60.7	4678.8	19.01	24.83	A2
		9675.0	2857.80	20.638	1320	270.4	283.3	296.2	638935.5	5.79	7.57	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
97-3055	OZ	180.0	120.28	0.812	53	53.5	56.0	58.5	4861.3	19.27	25.36	A1
		9680.1	3055.00	20.638	1371	261.4	273.5	285.6	663859.2	5.87	7.73	
97-3207	OZ	180.7	126.28	0.688	60	48.5	50.9	53.2	5421.3	20.06	26.93	A1
		9715.5	3207.40	17.462	1524	236.9	248.4	259.9	740322.4	6.11	8.21	
97-3106	OZ	181.1	122.28	0.75	56	53.6	56.9	60.3	5070.9	20.65	26.93	A3
		9736.8	3105.80	19.05	1422	261.5	277.9	294.3	692478.6	6.29	8.21	
98-2979	OZ	181.5	117.28	0.875	51	58.5	62.0	65.5	4628.1	20.00	25.62	A3
		9757.7	2978.80	22.225	1295	285.6	302.7	319.8	632007.4	6.09	7.81	
98-2903	OZ	181.6	114.28	1	48	60.6	63.2	65.8	4357.4	18.49	23.79	A1
		9761.3	2902.60	25.4	1219	295.8	308.6	321.3	595045.8	5.64	7.25	
98-2903	OZ	181.6	114.28	1	48	60.6	63.2	65.8	4357.4	18.49	23.79	A1
		9761.3	2902.60	25.4	1219	295.8	308.6	321.3	595047.1	5.64	7.25	
98-2807	OZ	181.6	110.51	0.875	50	58.0	60.7	63.4	4540.3	18.75	24.31	A2
		9764.1	2807.00	22.225	1270	283.2	296.3	309.5	620021.4	5.71	7.41	
98-2756	OZ	181.8	108.51	0.938	48	60.4	63.2	65.9	4363.3	18.49	23.79	A2
		9774.3	2756.20	23.812	1219	294.9	308.3	321.8	595842.1	5.64	7.25	
98-3004	OZ	182.0	118.28	0.875	52	56.1	58.6	61.1	4731.6	19.01	24.83	A1
		9784.1	3004.20	22.225	1320	273.8	286.1	298.4	646138.7	5.79	7.57	
98-2953	OZ	182.5	116.28	0.938	50	58.4	61.0	63.6	4561.7	18.75	24.31	A1
		9810.1	2953.40	23.812	1270	285.3	297.9	310.4	622939.7	5.71	7.41	
99-3207	OZ	184.8	126.28	0.688	60	51.2	54.4	57.7	5543.2	21.17	27.98	A3
		9934.0	3207.40	17.462	1524	249.9	265.8	281.7	756968.3	6.45	8.53	
99-3055	OZ	184.8	120.28	0.812	53	56.3	59.8	63.2	4989.3	20.39	26.41	A3
		9934.9	3055.00	20.638	1371	275.1	291.8	308.4	681335.5	6.21	8.05	
100-2959	OZ	186.7	116.51	0.75	56	53.3	55.9	58.4	5226.6	19.54	25.88	A2
		10035.7	2959.40	19.05	1422	260.3	272.7	285.2	713735.9	5.95	7.89	
101-2832	OZ	187.0	111.51	0.875	51	58.5	61.2	63.8	4767.9	18.88	24.57	A2
		10052.4	2832.40	22.225	1295	285.5	298.6	311.6	651092.2	5.75	7.49	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in ³ /ft (cm ³ /m)	in (mm)	in (mm)		in (mm)	lb/ft ² (kg/m ²)	
101-3004	OZ	187.0	118.28	0.875	52	58.9	62.4	65.9	4861.7	20.13	25.88	A3
		10053.2	3004.20	22.225	1320	287.8	304.8	321.7	663910.5	6.13	7.89	
101-2903	OZ	187.2	114.28	1	48	63.6	67.1	70.7	4492.1	19.60	24.84	A3
		10063.0	2902.60	25.4	1219	310.3	327.8	345.4	613439.7	5.98	7.57	
101-2903	OZ	187.2	114.28	1	48	63.6	67.1	70.7	4492.1	19.60	24.84	A3
		10063.0	2902.60	25.4	1219	310.3	327.8	345.4	613440.9	5.98	7.57	
101-3030	OZ	187.3	119.28	0.875	53	56.6	59.1	61.6	4963.1	19.14	25.10	A1
		10069.2	3029.60	22.225	1346	276.1	288.3	300.5	677758.1	5.83	7.65	
101-2928	OZ	187.6	115.28	1	48	61.2	63.8	66.4	4596.4	18.62	24.05	A1
		10086.4	2928.00	25.4	1244	298.7	311.3	324.0	627678.2	5.68	7.33	
101-2953	OZ	187.8	116.28	0.938	50	61.4	64.9	68.4	4694.1	19.87	25.36	A3
		10094.8	2953.40	23.812	1270	299.5	316.8	334.0	641017.1	6.05	7.73	
102-3106	OZ	190.5	122.28	0.812	56	54.4	56.8	59.2	5333.6	19.54	25.88	A1
		10241.1	3105.80	20.638	1422	265.4	277.3	289.2	728350.2	5.95	7.89	
102-2909	OZ	190.5	114.51	0.812	53	56.2	58.8	61.4	5143.6	19.27	25.36	A2
		10242.1	2908.60	20.638	1371	274.5	287.2	299.9	702403.2	5.87	7.73	
102-3061	OZ	190.5	120.51	0.688	60	50.8	53.3	55.8	5716.2	20.06	26.93	A2
		10244.2	3061.00	17.462	1524	248.2	260.3	272.3	780604.4	6.11	8.21	
103-3030	OZ	192.2	119.28	0.875	53	59.4	62.8	66.3	5092.2	20.26	26.15	A3
		10331.0	3029.60	22.225	1346	290.0	306.8	323.6	695380.9	6.17	7.97	
104-2858	OZ	192.8	112.51	0.875	52	59.0	61.6	64.3	5012.2	19.01	24.83	A2
		10364.3	2857.80	22.225	1320	287.9	300.8	313.7	684460.1	5.79	7.57	
104-2756	OZ	192.9	108.51	1	48	63.8	66.6	69.3	4628.5	18.49	23.79	A2
		10368.5	2756.20	25.4	1219	311.5	325.0	338.4	632065.9	5.64	7.25	
104-2756	OZ	192.9	108.51	1	48	63.8	66.6	69.3	4628.5	18.49	23.79	A2
		10368.6	2756.20	25.4	1219	311.5	325.0	338.4	632067.2	5.64	7.25	
104-3055	OZ	193.0	120.28	0.875	53	57.0	59.5	62.0	5211.9	19.27	25.36	A1
		10378.1	3055.00	22.225	1371	278.4	290.5	302.6	711731.6	5.87	7.73	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in ³ /ft (cm ³ /m)	in (mm)	in (mm)		in (mm)	lb/ft ² (kg/m ²)	
104-2928	OZ	193.1	115.28	1	48	64.1	67.7	71.2	4729.9	19.73	25.10	A3
		10379.4	2928.00	25.4	1244	313.0	330.4	347.8	645912.5	6.02	7.65	
104-2807	OZ	193.5	110.51	0.938	50	61.5	64.2	66.9	4838.5	18.75	24.31	A2
		10405.4	2807.00	23.812	1270	300.2	313.4	326.6	660744.6	5.71	7.41	
104-2953	OZ	193.7	116.28	1	50	61.8	64.3	66.9	4842.9	18.75	24.31	A1
		10414.8	2953.40	25.4	1270	301.5	314.0	326.6	661342.0	5.71	7.41	
104-2953	OZ	193.7	116.28	1	50	61.8	64.3	66.9	4842.9	18.75	24.31	A1
		10414.8	2953.40	25.4	1270	301.5	314.0	326.6	661342.9	5.71	7.41	
104-3004	OZ	194.1	118.28	0.938	52	59.5	62.0	64.5	5046.4	19.01	24.83	A1
		10435.0	3004.20	23.812	1320	290.4	302.7	315.1	689128.6	5.79	7.57	
105-3106	OZ	195.0	122.28	0.812	56	57.1	60.5	63.8	5459.5	20.65	26.93	A3
		10482.9	3105.80	20.638	1422	278.9	295.3	311.7	745540.6	6.29	8.21	
106-3207	OZ	196.3	126.28	0.75	60	52.2	54.6	57.0	5889.7	20.06	26.93	A1
		10555.0	3207.40	19.05	1524	255.0	266.5	278.1	804293.2	6.11	8.21	
106-3055	OZ	197.8	120.28	0.875	53	59.8	63.2	66.7	5339.9	20.39	26.41	A3
		10633.0	3055.00	22.225	1371	292.1	308.8	325.5	729207.9	6.21	8.05	
107-2883	OZ	198.2	113.51	0.875	53	59.4	62.1	64.7	5253.0	19.14	25.10	A2
		10657.4	2883.20	22.225	1346	290.2	303.0	315.8	717347.4	5.83	7.65	
107-3080	OZ	198.4	121.28	0.875	55	57.5	59.9	62.4	5456.5	19.40	25.62	A1
		10667.6	3080.40	22.225	1397	280.6	292.6	304.6	745133.9	5.91	7.81	
107-2953	OZ	199.0	116.28	1	50	64.7	68.2	71.7	4975.3	19.87	25.36	A3
		10699.5	2953.40	25.4	1270	315.7	333.0	350.2	679419.4	6.05	7.73	
107-2953	OZ	199.0	116.28	1	50	64.7	68.2	71.7	4975.3	19.87	25.36	A3
		10699.5	2953.40	25.4	1270	315.7	333.0	350.2	679420.3	6.05	7.73	
107-2782	OZ	199.1	109.51	1	48	64.4	67.1	69.8	4877.6	18.62	24.05	A2
		10703.5	2781.60	25.4	1244	314.4	327.7	341.0	666077.7	5.68	7.33	
107-3004	OZ	199.1	118.28	0.938	52	62.3	65.8	69.3	5176.5	20.13	25.88	A3
		10704.1	3004.20	23.812	1320	304.4	321.4	338.3	706900.3	6.13	7.89	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in ³ /ft (cm ³ /m)	in (mm)	in (mm)		in (mm)	lb/ft ² (kg/m ²)	
107-2979	OZ	199.9	117.28	1	51	62.3	64.9	67.4	5097.0	18.88	24.57	A1
		10746.4	2978.80	25.4	1295	304.3	316.7	329.1	696044.9	5.75	7.49	
108-3207	OZ	200.4	126.28	0.75	60	54.9	58.2	61.4	6011.6	21.17	27.98	A3
		10773.5	3207.40	19.05	1524	268.1	284.0	299.9	820939.1	6.45	8.53	
108-2959	OZ	201.2	116.51	0.812	56	57.1	59.6	62.2	5634.4	19.54	25.88	A2
		10818.7	2959.40	20.638	1422	278.5	291.0	303.5	769422.9	5.95	7.89	
109-3080	OZ	203.0	121.28	0.875	55	60.3	63.7	67.0	5583.4	20.52	26.67	A3
		10915.8	3080.40	22.225	1397	294.2	310.8	327.3	762466.1	6.25	8.13	
110-2909	OZ	204.1	114.51	0.875	53	59.9	62.5	65.1	5511.8	19.27	25.36	A2
		10975.3	2908.60	22.225	1371	292.4	305.1	317.8	752685.1	5.87	7.73	
110-3106	OZ	204.3	122.28	0.875	56	57.9	60.4	62.8	5719.5	19.54	25.88	A1
		10982.1	3105.80	22.225	1422	282.8	294.7	306.6	781048.4	5.95	7.89	
110-2979	OZ	205.0	117.28	1	51	65.2	68.7	72.2	5228.3	20.00	25.62	A3
		11023.1	2978.80	25.4	1295	318.4	335.5	352.6	713968.2	6.09	7.81	
110-2807	OZ	205.4	110.51	1	50	65.0	67.7	70.4	5134.4	18.75	24.31	A2
		11041.7	2807.00	25.4	1270	317.2	330.4	343.6	701149.7	5.71	7.41	
110-2807	OZ	205.4	110.51	1	50	65.0	67.7	70.4	5134.4	18.75	24.31	A2
		11041.7	2807.00	25.4	1270	317.2	330.4	343.6	701150.7	5.71	7.41	
110-2858	OZ	205.5	112.51	0.938	52	62.5	65.2	67.8	5343.1	19.01	24.83	A2
		11048.6	2857.80	23.812	1320	305.3	318.3	331.2	729652.2	5.79	7.57	
111-3055	OZ	205.9	120.28	0.938	53	60.5	63.0	65.5	5559.9	19.27	25.36	A1
		11071.2	3055.00	23.812	1371	295.4	307.5	319.6	759260.2	5.87	7.73	
111-3004	OZ	206.1	118.28	1	52	62.9	65.4	67.9	5358.8	19.01	24.83	A1
		11081.0	3004.20	25.4	1320	307.0	319.3	331.6	731792.2	5.79	7.57	
111-3004	OZ	206.1	118.28	1	52	62.9	65.4	67.9	5358.8	19.01	24.83	A1
		11081.1	3004.20	25.4	1320	307.0	319.3	331.6	731793.2	5.79	7.57	
111-3061	OZ	206.9	120.51	0.75	60	54.7	57.2	59.7	6207.1	20.06	26.93	A2
		11123.8	3061.00	19.05	1524	267.2	279.3	291.4	847634.8	6.11	8.21	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in ³ /ft (cm ³ /m)	in (mm)	in (mm)		in (mm)	lb/ft ² (kg/m ²)	
112-3106	OZ	208.8	122.28	0.875	56	60.7	64.0	67.4	5845.4	20.65	26.93	A3
		11223.8	3105.80	22.225	1422	296.3	312.7	329.1	798238.8	6.29	8.21	
113-2934	OZ	209.7	115.51	0.875	55	60.3	62.9	65.5	5766.0	19.40	25.62	A2
		11272.7	2934.00	22.225	1397	294.6	307.2	319.8	787399.6	5.91	7.81	
113-3055	OZ	210.7	120.28	0.938	53	63.3	66.7	70.1	5687.9	20.39	26.41	A3
		11326.0	3055.00	23.812	1371	309.1	325.8	342.5	776736.5	6.21	8.05	
114-3004	OZ	211.1	118.28	1	52	65.7	69.2	72.7	5488.9	20.13	25.88	A3
		11350.2	3004.20	25.4	1320	321.0	337.9	354.9	749563.9	6.13	7.89	
114-3004	OZ	211.1	118.28	1	52	65.7	69.2	72.7	5489.0	20.13	25.88	A3
		11350.2	3004.20	25.4	1320	321.0	337.9	354.9	749565.0	6.13	7.89	
114-2832	OZ	211.7	111.51	1	51	65.5	68.2	70.9	5399.1	18.88	24.57	A2
		11383.2	2832.40	25.4	1295	320.0	333.1	346.1	737289.4	5.75	7.49	
114-3207	OZ	211.8	126.28	0.812	60	55.9	58.3	60.7	6355.2	20.06	26.93	A1
		11389.1	3207.40	20.638	1524	273.1	284.7	296.2	867852.5	6.11	8.21	
114-3030	OZ	212.4	119.28	1	53	63.4	65.9	68.4	5628.3	19.14	25.10	A1
		11418.7	3029.60	25.4	1346	309.7	321.9	334.1	768593.1	5.83	7.65	
116-2959	OZ	215.7	116.51	0.875	56	60.8	63.3	65.9	6039.4	19.54	25.88	A2
		11596.3	2959.40	22.225	1422	296.8	309.3	321.8	824728.0	5.95	7.89	
116-3207	OZ	215.9	126.28	0.812	60	58.6	61.9	65.1	6477.0	21.17	27.98	A3
		11607.6	3207.40	20.638	1524	286.2	302.1	318.0	884498.3	6.45	8.53	
117-3030	OZ	217.3	119.28	1	53	66.3	69.7	73.2	5757.3	20.26	26.15	A3
		11680.5	3029.60	25.4	1346	323.5	340.4	357.2	786215.9	6.17	7.97	
117-2909	OZ	217.7	114.51	0.938	53	63.5	66.1	68.7	5877.4	19.27	25.36	A2
		11703.2	2908.60	23.812	1371	310.2	323.0	335.7	802606.1	5.87	7.73	
117-3106	OZ	218.0	122.28	0.938	56	61.5	63.9	66.4	6102.8	19.54	25.88	A1
		11718.0	3105.80	23.812	1422	300.2	312.1	324.0	833385.9	5.95	7.89	
117-2858	OZ	218.1	112.51	1	52	66.1	68.8	71.4	5671.6	19.01	24.83	A2
		11727.8	2857.80	25.4	1320	322.7	335.7	348.6	774501.4	5.79	7.57	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in ³ /ft (cm ³ /m)	in (mm)	in (mm)		in (mm)	lb/ft ² (kg/m ²)	
117-2858	OZ	218.1	112.51	1	52	66.1	68.8	71.4	5671.6	19.01	24.83	A2
		11727.8	2857.80	25.4	1320	322.7	335.7	348.6	774502.5	5.79	7.57	
118-3055	OZ	218.7	120.28	1	53	64.0	66.4	68.9	5905.5	19.27	25.36	A1
		11759.3	3055.00	25.4	1371	312.3	324.4	336.5	806450.4	5.87	7.73	
118-3055	OZ	218.7	120.28	1	53	64.0	66.4	68.9	5905.5	19.27	25.36	A1
		11759.3	3055.00	25.4	1371	312.3	324.4	336.5	806451.7	5.87	7.73	
120-3106	OZ	222.5	122.28	0.938	56	64.2	67.6	71.0	6228.6	20.65	26.93	A3
		11959.7	3105.80	23.812	1422	313.7	330.1	346.5	850576.3	6.29	8.21	
120-3061	OZ	223.2	120.51	0.812	60	58.6	61.1	63.6	6694.8	20.06	26.93	A2
		11997.8	3061.00	20.638	1524	286.2	298.3	310.3	914233.9	6.11	8.21	
120-3055	OZ	223.5	120.28	1	53	66.8	70.2	73.6	6033.5	20.39	26.41	A3
		12014.1	3055.00	25.4	1371	326.1	342.7	359.4	823926.7	6.21	8.05	
120-3055	OZ	223.5	120.28	1	53	66.8	70.2	73.6	6033.5	20.39	26.41	A3
		12014.1	3055.00	25.4	1371	326.1	342.7	359.4	823928.0	6.21	8.05	
121-2883	OZ	224.6	113.51	1	53	66.7	69.3	71.9	5952.0	19.14	25.10	A2
		12075.4	2883.20	25.4	1346	325.4	338.2	351.1	812794.7	5.83	7.65	
121-3080	OZ	225.1	121.28	1	55	64.5	67.0	69.4	6190.5	19.40	25.62	A1
		12102.7	3080.40	25.4	1397	314.9	326.9	338.9	845370.7	5.91	7.81	
122-3207	OZ	227.3	126.28	0.875	60	59.6	62.0	64.4	6817.6	20.06	26.93	A1
		12218.0	3207.40	22.225	1524	291.2	302.7	314.3	931009.5	6.11	8.21	
124-3080	OZ	229.7	121.28	1	55	67.3	70.7	74.1	6317.4	20.52	26.67	A3
		12350.8	3080.40	25.4	1397	328.5	345.1	361.6	862702.9	6.25	8.13	
124-2959	OZ	230.1	116.51	0.938	56	64.5	67.1	69.6	6441.6	19.54	25.88	A2
		12368.6	2959.40	23.812	1422	315.0	327.5	340.0	879654.7	5.95	7.89	
124-2909	OZ	231.1	114.51	1	53	67.2	69.8	72.4	6240.3	19.27	25.36	A2
		12425.9	2908.60	25.4	1371	328.0	340.8	353.5	852171.5	5.87	7.73	
124-2909	OZ	231.1	114.51	1	53	67.2	69.8	72.4	6240.3	19.27	25.36	A2
		12426.0	2908.60	25.4	1371	328.0	340.8	353.5	852172.9	5.87	7.73	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
124-3207	OZ	231.3	126.28	0.875	60	62.3	65.6	68.8	6939.5	21.17	27.98	A3
		12436.4	3207.40	22.225	1524	304.3	320.2	336.1	947655.4	6.45	8.53	
124-3106	OZ	231.5	122.28	1	56	65.0	67.5	69.9	6483.4	19.54	25.88	A1
		12448.8	3105.80	25.4	1422	317.5	329.4	341.3	885359.6	5.95	7.89	
127-3106	OZ	236.0	122.28	1	56	67.8	71.1	74.5	6609.2	20.65	26.93	A3
		12690.5	3105.80	25.4	1422	331.0	347.4	363.8	902550.1	6.29	8.21	
128-2934	OZ	237.7	115.51	1	55	67.7	70.3	72.9	6536.7	19.40	25.62	A2
		12779.4	2934.00	25.4	1397	330.6	343.2	355.8	892638.0	5.91	7.81	
129-3061	OZ	239.3	120.51	0.875	60	62.5	65.0	67.4	7179.4	20.06	26.93	A2
		12866.3	3061.00	22.225	1524	305.1	317.2	329.3	980411.6	6.11	8.21	
130-3207	OZ	242.6	126.28	0.938	60	63.3	65.7	68.1	7277.1	20.06	26.93	A1
		13041.4	3207.40	23.812	1524	309.2	320.8	332.3	993758.2	6.11	8.21	
131-2959	OZ	244.3	116.51	1	56	68.2	70.8	73.4	6841.0	19.54	25.88	A2
		13135.5	2959.40	25.4	1422	333.2	345.7	358.1	934199.5	5.95	7.89	
133-3207	OZ	246.6	126.28	0.938	60	66.0	69.3	72.5	7399.0	21.17	27.98	A3
		13259.9	3207.40	23.812	1524	322.3	338.2	354.1	1010404.1	6.45	8.53	
137-3061	OZ	255.4	120.51	0.938	60	66.4	68.8	71.3	7660.9	20.06	26.93	A2
		13729.2	3061.00	23.812	1524	324.0	336.1	348.2	1046161.4	6.11	8.21	
139-3207	OZ	257.8	126.28	1	60	67.0	69.4	71.7	7733.7	20.06	26.93	A1
		13859.6	3207.40	25.4	1524	327.2	338.8	350.3	1056104.6	6.11	8.21	
141-3207	OZ	261.9	126.28	1	60	69.7	73.0	76.2	7855.6	21.17	27.98	A3
		14078.1	3207.40	25.4	1524	340.3	356.2	372.1	1072750.5	6.45	8.53	
146-3061	OZ	271.3	120.51	1	60	70.2	72.7	75.2	8139.3	20.06	26.93	A2
		14586.5	3061.00	25.4	1524	342.9	355.0	367.1	1111489.7	6.11	8.21	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.