


Pile HR[®]

sheet-pile.com/oz-pile


PilePro[®] Sheet Pile Connectors




HR[®] Omega



HR[®] 90




HR[®] Colt




HR[®] 135



HR[®] 180



HR[®] Tee




C9[®]

OZ Pile HR[®]



Configuration A

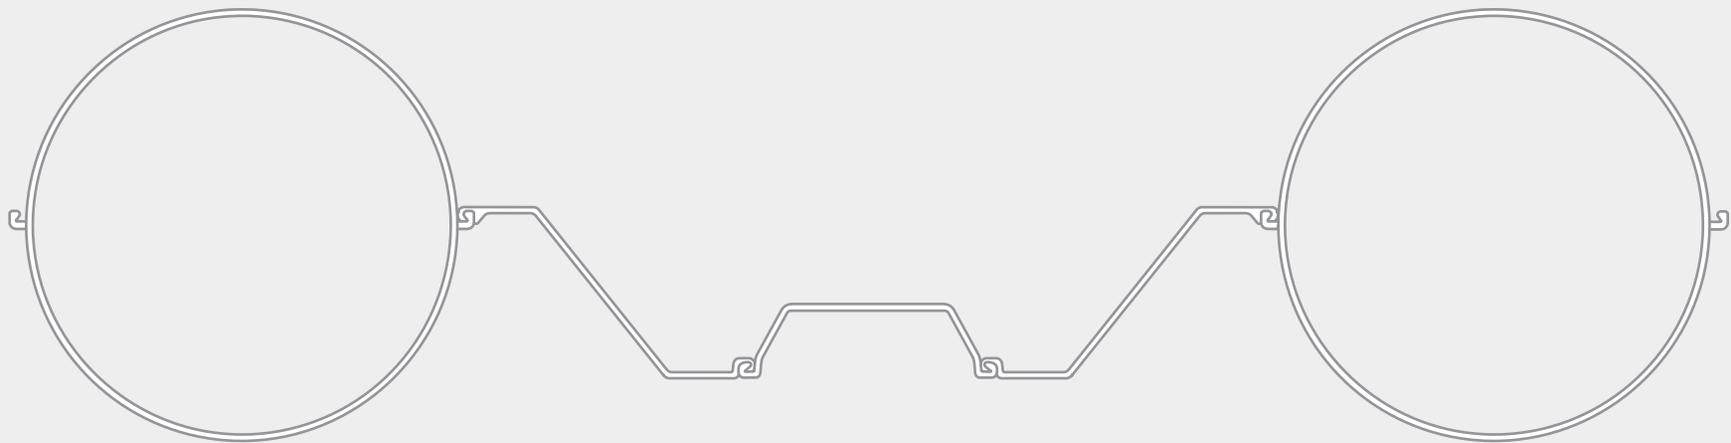

SECTION NAME:

78 - 2527



Section modulus (elastic) in $\text{cm}^3/\text{m} \div 100$

These are examples from a large variety of possible OZ-Pile solutions.


Please configure your own system on sheet-pile.com/oz-pile

Sheet Pile LLC is the owner and assignee of numerous patents and IP, that may be related to this sheet pile solution.

OZ Pile HR[®]




Configuration B

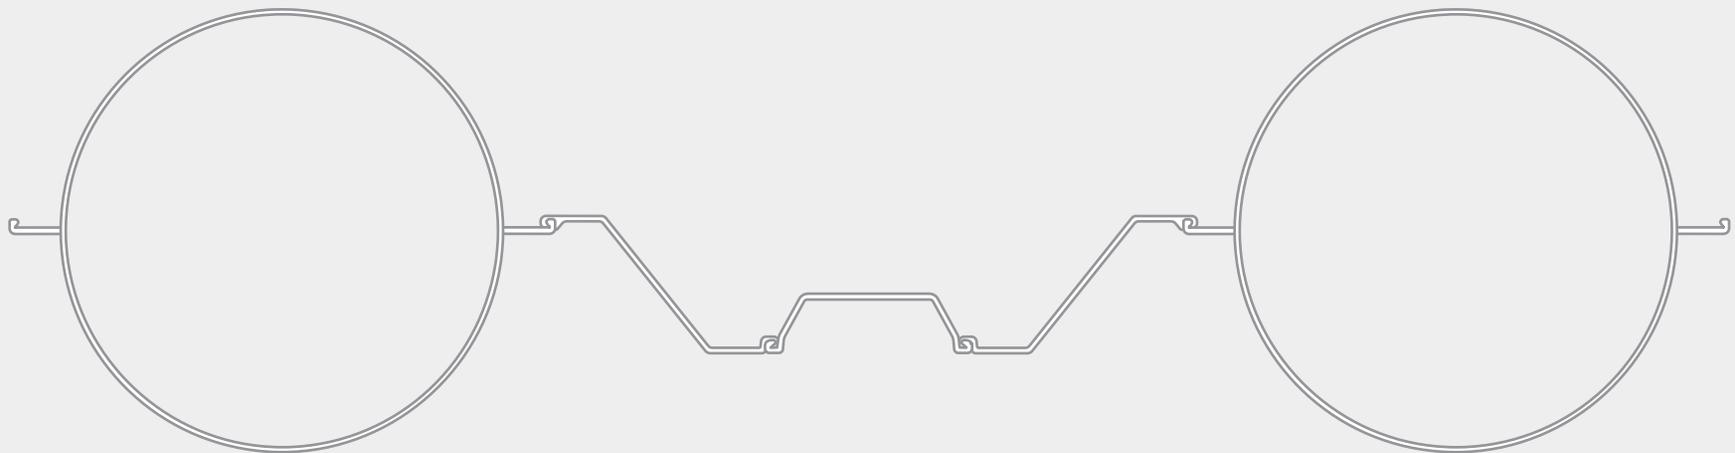

SECTION NAME:

87 - 3714



Section width in mm

Section modulus (elastic) in $\text{cm}^3/\text{m} \div 100$

These are examples from a large variety of possible OZ-Pile solutions.

Please configure your own system on sheet-pile.com/oz-pile

Sheet Pile LLC is the owner and assignee of numerous patents and IP, that may be related to this sheet pile solution.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
12-2889	OZ	21.6	113.72	0.394	18	19	22.7	26.5	194.4	11.15	22.49	B1
		1161.5	2888.6	10	457	92.8	111	129.2	26552.8	3.4	6.86	
12-2939	OZ	21.9	115.72	0.375	20	19.2	22.8	26.5	219	11.41	23.02	B1
		1177.4	2939.4	9.525	508	93.5	111.4	129.3	29906.8	3.48	7.02	
12-2939	OZ	22.4	115.72	0.394	20	19.6	23.2	26.9	224.4	11.41	23.02	B1
		1206.6	2939.4	10	508	95.5	113.4	131.2	30646.5	3.48	7.02	
12-2889	OZ	22.6	113.72	0.438	18	19.9	23.6	27.3	203.6	11.15	22.49	B1
		1216.4	2888.6	11.112	457	96.9	115.1	133.4	27807.1	3.4	6.86	
12-2657	OZ	23	104.61	0.375	18	19.4	23.1	26.9	207.1	11.15	22.49	A1
		1236.9	2657.2	9.525	457	94.7	113	131.4	28276.6	3.4	6.86	
13-2889	OZ	23.4	113.72	0.472	18	20.5	24.3	28	210.9	11.15	22.49	B1
		1259.6	2888.6	12	457	100.2	118.4	136.6	28794	3.4	6.86	
13-2657	OZ	23.5	104.61	0.394	18	19.8	23.5	27.3	211.4	11.15	22.49	A1
		1262.7	2657.2	10	457	96.6	114.9	133.3	28865.1	3.4	6.86	
13-2939	OZ	23.7	115.72	0.438	20	20.5	24.1	27.8	237	11.41	23.02	B1
		1274.1	2939.4	11.112	508	100	117.9	135.8	32362	3.48	7.02	
13-2708	OZ	23.8	106.61	0.375	20	19.9	23.6	27.3	237.7	11.41	23.02	A1
		1278	2708	9.525	508	97.3	115.3	133.3	32462.4	3.48	7.02	
13-2889	OZ	24.1	113.72	0.5	18	21.1	24.8	28.5	216.5	11.15	22.49	B1
		1293.3	2888.6	12.7	457	102.8	121	139.2	29563.9	3.4	6.86	
13-2708	OZ	24.4	106.61	0.394	20	20.4	24	27.7	243.6	11.41	23.02	A1
		1309.7	2708	10	508	99.4	117.4	135.4	33265.2	3.48	7.02	
13-3041	OZ	24.6	119.72	0.375	24	20.1	23.7	27.2	294.8	11.93	24.07	B1
		1320.6	3041	9.525	609	98.2	115.5	132.8	40252.1	3.64	7.34	
13-2657	OZ	24.6	104.61	0.438	18	20.7	24.5	28.2	221.4	11.15	22.49	A1
		1322.3	2657.2	11.112	457	101.1	119.4	137.8	30228.6	3.4	6.86	
13-2939	OZ	24.7	115.72	0.472	20	21.2	24.9	28.6	246.9	11.41	23.02	B1
		1327.3	2939.4	12	508	103.6	121.5	139.4	33713.7	3.48	7.02	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
14-3041	OZ	25.3	119.72	0.394	24	20.6	24.1	27.7	304	11.93	24.07	B1
		1362	3041	10	609	100.5	117.8	135.1	41512.3	3.64	7.34	
14-2889	OZ	25.5	113.72	0.562	18	22.3	26	29.7	229.1	11.15	22.49	B1
		1368.4	2888.6	14.288	457	108.6	126.9	145.1	31282.3	3.4	6.86	
14-2939	OZ	25.5	115.72	0.5	20	21.8	25.5	29.1	254.6	11.41	23.02	B1
		1368.9	2939.4	12.7	508	106.5	124.3	142.2	34769.4	3.48	7.02	
14-2657	OZ	25.5	104.61	0.472	18	21.4	25.2	29	229.2	11.15	22.49	A1
		1369.3	2657.2	12	457	104.7	123	141.4	31301.5	3.4	6.86	
14-2708	OZ	25.7	106.61	0.438	20	21.4	25.1	28.7	257.2	11.41	23.02	A1
		1383	2708	11.112	508	104.3	122.3	140.4	35127.3	3.48	7.02	
14-2657	OZ	26.1	104.61	0.5	18	22	25.8	29.5	235.3	11.15	22.49	A1
		1405.9	2657.2	12.7	457	107.5	125.8	144.2	32138.4	3.4	6.86	
14-2810	OZ	26.6	110.61	0.375	24	20.9	24.5	28.1	319	11.93	24.07	A1
		1429.4	2809.6	9.525	609	102.3	119.6	137	43567.3	3.64	7.34	
14-2708	OZ	26.8	106.61	0.472	20	22.2	25.9	29.5	268	11.41	23.02	A1
		1440.7	2708	12	508	108.2	126.3	144.3	36594.5	3.48	7.02	
14-2889	OZ	26.8	113.72	0.625	18	23.4	27.2	30.9	241.4	11.15	22.49	B1
		1442	2888.6	15.875	457	114.4	132.6	150.8	32963	3.4	6.86	
15-3041	OZ	27.1	119.72	0.438	24	21.7	25.2	28.8	325.4	11.93	24.07	B1
		1458	3041	11.112	609	105.8	123.1	140.4	44440.2	3.64	7.34	
15-2939	OZ	27.2	115.72	0.562	20	23.1	26.8	30.4	271.9	11.41	23.02	B1
		1461.8	2939.4	14.288	508	112.9	130.8	148.6	37129.8	3.48	7.02	
15-2810	OZ	27.4	110.61	0.394	24	21.4	25	28.6	329	11.93	24.07	A1
		1474.1	2809.6	10	609	104.7	122.1	139.4	44931.3	3.64	7.34	
15-2708	OZ	27.6	106.61	0.5	20	22.8	26.5	30.2	276.4	11.41	23.02	A1
		1485.8	2708	12.7	508	111.3	129.3	147.4	37740.5	3.48	7.02	
15-2657	OZ	27.7	104.61	0.562	18	23.3	27.1	30.8	249	11.15	22.49	A1
		1487.6	2657.2	14.288	457	113.8	132.2	150.5	34006.5	3.4	6.86	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
15-3143	OZ	28.4	123.72	0.375	28	21	24.5	27.9	398	12.46	25.11	B1
		1528.5	3142.6	9.525	711	102.7	119.4	136.1	54352.1	3.8	7.65	
15-3041	OZ	28.5	119.72	0.472	24	22.5	26.1	29.6	342.4	11.93	24.07	B1
		1533.9	3041	12	609	110	127.3	144.6	46752.4	3.64	7.34	
16-2939	OZ	28.9	115.72	0.625	20	24.4	28.1	31.7	288.8	11.41	23.02	B1
		1552.9	2939.4	15.875	508	119.2	137.1	155	39443.8	3.48	7.02	
16-2657	OZ	29.2	104.61	0.625	18	24.6	28.4	32.1	262.4	11.15	22.49	A1
		1567.5	2657.2	15.875	457	120.1	138.5	156.8	35833.6	3.4	6.86	
16-2810	OZ	29.4	110.61	0.438	24	22.6	26.2	29.7	352.2	11.93	24.07	A1
		1578.1	2809.6	11.112	609	110.5	127.8	145.2	48100.4	3.64	7.34	
16-2889	OZ	29.4	113.72	0.75	18	25.8	29.5	33.2	264.8	11.15	22.49	B1
		1581.9	2888.6	19.05	457	125.9	144.1	162.3	36163.3	3.4	6.86	
16-3143	OZ	29.5	123.72	0.394	28	21.6	25	28.4	412.4	12.46	25.11	B1
		1583.7	3142.6	10	711	105.2	122	138.7	56316.1	3.8	7.65	
16-2708	OZ	29.5	106.61	0.562	20	24.2	27.9	31.6	295.1	11.41	23.02	A1
		1586.7	2708	14.288	508	118.3	136.3	154.3	40302.6	3.48	7.02	
16-3041	OZ	29.6	119.72	0.5	24	23.2	26.8	30.3	355.6	11.93	24.07	B1
		1593.2	3041	12.7	609	113.4	130.7	147.9	48561	3.64	7.34	
16-2901	OZ	30.6	114.21	0.375	24	21.1	24.8	28.6	366.6	11.97	24.13	B2
		1642.5	2901	9.525	609	103.1	121.3	139.5	50064.6	3.65	7.36	
16-2911	OZ	30.7	114.61	0.375	28	21.9	25.3	28.8	429.6	12.46	25.11	A1
		1650	2911.2	9.525	711	106.9	123.6	140.4	58672.4	3.8	7.65	
17-3193	OZ	30.7	125.72	0.375	30	21.5	24.8	28.2	460.8	12.72	25.64	B1
		1651.7	3193.4	9.525	762	104.8	121.2	137.7	62928.5	3.88	7.81	
17-2810	OZ	30.9	110.61	0.472	24	23.6	27.1	30.7	370.6	11.93	24.07	A1
		1660.2	2809.6	12	609	115	132.4	149.8	50602.9	3.64	7.34	
17-2708	OZ	31.4	106.61	0.625	20	25.6	29.3	33	313.5	11.41	23.02	A1
		1685.6	2708	15.875	508	125.2	143.2	161.2	42814.3	3.48	7.02	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
17-2901	OZ	31.4	114.21	0.394	24	21.6	25.3	29.1	376.3	11.97	24.13	B2
		1685.9	2901	10	609	105.5	123.7	141.9	51385.6	3.65	7.36	
17-2911	OZ	31.8	114.61	0.394	28	22.5	25.9	29.3	445.2	12.46	25.11	A1
		1709.6	2911.2	10	711	109.7	126.4	143.2	60792.4	3.8	7.65	
17-3143	OZ	31.8	123.72	0.438	28	22.8	26.2	29.6	445.9	12.46	25.11	B1
		1712.2	3142.6	11.112	711	111.3	128	144.7	60884.9	3.8	7.65	
17-3193	OZ	31.9	125.72	0.394	30	22	25.4	28.8	478.3	12.72	25.64	B1
		1714.4	3193.4	10	762	107.5	124	140.4	65319.1	3.88	7.81	
17-2657	OZ	32	104.61	0.75	18	27.1	30.9	34.7	287.9	11.15	22.49	A1
		1719.7	2657.2	19.05	457	132.5	150.9	169.3	39312.6	3.4	6.86	
17-2810	OZ	32.1	110.61	0.5	24	24.3	27.9	31.4	384.9	11.93	24.07	A1
		1724.4	2809.6	12.7	609	118.6	136	153.4	52560.5	3.64	7.34	
17-3041	OZ	32.1	119.72	0.562	24	24.8	28.3	31.8	385.3	11.93	24.07	B1
		1726.2	3041	14.288	609	120.9	138.2	155.4	52615.2	3.64	7.34	
17-2939	OZ	32.2	115.72	0.75	20	27	30.7	34.3	321.7	11.41	23.02	B1
		1729.7	2939.4	19.05	508	131.8	149.7	167.6	43934.9	3.48	7.02	
18-2962	OZ	33.1	116.61	0.375	30	22.3	25.7	29.1	496.8	12.72	25.64	A1
		1780.7	2962	9.525	762	109.1	125.6	142	67844.7	3.88	7.81	
18-2670	OZ	33.2	105.1	0.375	24	22.1	25.8	29.6	398.4	11.97	24.13	A2
		1784.9	2669.6	9.525	609	107.8	126.1	144.4	54404.1	3.65	7.36	
18-3244	OZ	33.2	127.72	0.375	31	21.9	25.2	28.5	531.5	12.98	26.16	B1
		1785.9	3244.2	9.525	812	106.8	123	139.2	72579.4	3.96	7.97	
18-2901	OZ	33.2	114.21	0.438	24	22.7	26.5	30.2	398.8	11.97	24.13	B2
		1786.6	2901	11.112	609	111.1	129.2	147.4	54454.8	3.65	7.36	
18-3003	OZ	33.7	118.21	0.375	28	22	25.6	29.2	472.3	12.49	25.18	B2
		1813.6	3002.6	9.525	711	107.6	125.1	142.7	64490	3.81	7.67	
18-3143	OZ	33.7	123.72	0.472	28	23.8	27.2	30.6	472.3	12.46	25.11	B1
		1813.8	3142.6	12	711	116	132.8	149.5	64497.9	3.8	7.65	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
18-2670	OZ	34.1	105.1	0.394	24	22.6	26.4	30.1	408.9	11.97	24.13	A2
		1832	2669.6	10	609	110.4	128.7	147	55839.7	3.65	7.36	
18-2911	OZ	34.4	114.61	0.438	28	23.8	27.2	30.7	481.3	12.46	25.11	A1
		1848.3	2911.2	11.112	711	116.2	132.9	149.7	65724.4	3.8	7.65	
18-2962	OZ	34.4	116.61	0.394	30	22.9	26.3	29.7	515.7	12.72	25.64	A1
		1848.3	2962	10	762	112	128.5	145	70422	3.88	7.81	
19-3244	OZ	34.5	127.72	0.394	31	22.5	25.8	29.1	552.5	12.98	26.16	B1
		1856.5	3244.2	10	812	109.7	125.9	142.1	75449.7	3.96	7.97	
19-3041	OZ	34.5	119.72	0.625	24	26.3	29.8	33.4	414.5	11.93	24.07	B1
		1857.1	3041	15.875	609	128.3	145.6	162.9	56603.4	3.64	7.34	
19-3193	OZ	34.6	125.72	0.438	30	23.3	26.7	30.1	519.1	12.72	25.64	B1
		1860.4	3193.4	11.112	762	113.8	130.3	146.8	70883.1	3.88	7.81	
19-2901	OZ	34.7	114.21	0.472	24	23.7	27.4	31.1	416.5	11.97	24.13	B2
		1866.1	2901	12	609	115.5	133.7	151.9	56878.6	3.65	7.36	
19-2810	OZ	34.8	110.61	0.562	24	26	29.5	33.1	417	11.93	24.07	A1
		1868.4	2809.6	14.288	609	126.7	144.1	161.5	56948.7	3.64	7.34	
19-3003	OZ	34.8	118.21	0.394	28	22.6	26.2	29.8	487.3	12.49	25.18	B2
		1871.4	3002.6	10	711	110.3	127.8	145.4	66545.6	3.81	7.67	
19-2708	OZ	34.9	106.61	0.75	20	28.4	32.1	35.8	349.2	11.41	23.02	A1
		1877.5	2708	19.05	508	138.9	156.9	174.9	47689.2	3.48	7.02	
19-3143	OZ	35.2	123.72	0.5	28	24.5	28	31.4	493	12.46	25.11	B1
		1893.4	3142.6	12.7	711	119.8	136.6	153.3	67327.7	3.8	7.65	
19-3013	OZ	35.8	118.61	0.375	31	22.8	26.1	29.4	572.3	12.98	26.16	A1
		1923.1	3012.8	9.525	812	111.2	127.4	143.6	78153.9	3.96	7.97	
19-3053	OZ	35.8	120.21	0.375	30	22.5	26	29.5	536.7	12.75	25.7	B2
		1923.6	3053.4	9.525	762	109.7	127	144.2	73291	3.89	7.83	
19-2901	OZ	35.9	114.21	0.5	24	24.4	28.1	31.8	430.4	11.97	24.13	B2
		1928.3	2901	12.7	609	119	137.2	155.3	58774.5	3.65	7.36	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
19-3295	OZ	35.9	129.72	0.375	34	22.3	25.5	28.8	610.3	13.24	26.68	B1
		1930.2	3295	9.525	863	108.8	124.7	140.7	83345.1	4.04	8.13	
19-2670	OZ	36.1	105.1	0.438	24	23.8	27.6	31.4	433.3	11.97	24.13	A2
		1941.4	2669.6	11.112	609	116.4	134.7	153.1	59175	3.65	7.36	
19-2301	OZ	36.1	90.59	0.375	24	23	26.5	29.9	433.6	9.24	18.49	B3
		1942.8	2301	9.525	609	112.2	129.2	146.1	59215	2.82	5.64	
20-2911	OZ	36.4	114.61	0.472	28	24.9	28.3	31.7	509.8	12.46	25.11	A1
		1957.9	2911.2	12	711	121.3	138.1	154.9	69624.5	3.8	7.65	
20-2771	OZ	36.5	109.1	0.375	28	23	26.6	30.3	511.7	12.49	25.18	A2
		1965	2771.2	9.525	711	112.4	130.1	147.7	69875	3.81	7.67	
20-3193	OZ	36.8	125.72	0.472	30	24.4	27.7	31.1	551.3	12.72	25.64	B1
		1976	3193.4	12	762	118.9	135.4	151.8	75285.6	3.88	7.81	
20-3041	OZ	36.9	119.72	0.688	24	27.8	31.3	34.9	443.2	11.93	24.07	B1
		1985.8	3041	17.462	609	135.7	153	170.3	60526.5	3.64	7.34	
20-3053	OZ	37	120.21	0.394	30	23.1	26.6	30.1	555	12.75	25.7	B2
		1989.3	3053.4	10	762	112.5	129.8	147.1	75791.2	3.89	7.83	
20-2301	OZ	37.2	90.59	0.394	24	23.6	27.1	30.5	445.8	9.24	18.49	B3
		1997.4	2301	10	609	115.2	132.2	149.1	60880.6	2.82	5.64	
20-3013	OZ	37.2	118.61	0.394	31	23.4	26.7	30	594.9	12.98	26.16	A1
		1999.1	3012.8	10	812	114.3	130.5	146.7	81244.7	3.96	7.97	
20-2962	OZ	37.3	116.61	0.438	30	24.3	27.7	31.1	559.6	12.72	25.64	A1
		2005.8	2962	11.112	762	118.9	135.4	151.8	76420.6	3.88	7.81	
20-3003	OZ	37.3	118.21	0.438	28	23.9	27.5	31.1	522.3	12.49	25.18	B2
		2005.8	3002.6	11.112	711	116.6	134.1	151.7	71327.4	3.81	7.67	
20-3295	OZ	37.4	129.72	0.394	34	22.9	26.2	29.4	635.3	13.24	26.68	B1
		2009	3295	10	863	111.8	127.7	143.7	86749.3	4.04	8.13	
20-2810	OZ	37.4	110.61	0.625	24	27.6	31.2	34.7	448.6	11.93	24.07	A1
		2010	2809.6	15.875	609	134.8	152.2	169.5	61265.3	3.64	7.34	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
20-3244	OZ	37.6	127.72	0.438	31	23.8	27.2	30.5	601.4	12.98	26.16	B1
		2021	3244.2	11.112	812	116.4	132.6	148.8	82131.8	3.96	7.97	
20-2771	OZ	37.7	109.1	0.394	28	23.6	27.2	30.9	528	12.49	25.18	A2
		2027.6	2771.2	10	711	115.4	133	150.7	72102.2	3.81	7.67	
20-2670	OZ	37.7	105.1	0.472	24	24.8	28.6	32.3	452.6	11.97	24.13	A2
		2027.8	2669.6	12	609	121.2	139.6	157.9	61808.8	3.65	7.36	
20-2911	OZ	38	114.61	0.5	28	25.7	29.1	32.6	532.2	12.46	25.11	A1
		2043.8	2911.2	12.7	711	125.4	142.2	158.9	72679.3	3.8	7.65	
20-3104	OZ	38.1	122.21	0.375	31	22.9	26.4	29.8	609.3	13.01	26.23	B2
		2047.4	3104.2	9.525	812	111.7	128.7	145.7	83207.5	3.97	7.99	
21-3193	OZ	38.4	125.72	0.5	30	25.2	28.5	31.9	576.6	12.72	25.64	B1
		2066.5	3193.4	12.7	762	122.9	139.4	155.8	78735.5	3.88	7.81	
21-2901	OZ	38.5	114.21	0.562	24	26	29.7	33.4	461.5	11.97	24.13	B2
		2067.7	2901	14.288	609	126.8	145	163.2	63024.4	3.65	7.36	
21-3143	OZ	38.5	123.72	0.562	28	26.3	29.7	33.1	539.6	12.46	25.11	B1
		2072	3142.6	14.288	711	128.3	145.1	161.8	73682	3.8	7.65	
21-3064	OZ	38.6	120.61	0.375	34	23.2	26.5	29.7	656.4	13.24	26.68	A1
		2076	3063.6	9.525	863	113.3	129.2	145.1	89640.3	4.04	8.13	
21-2822	OZ	38.7	111.1	0.375	30	23.5	27	30.6	580.7	12.75	25.7	A2
		2081.4	2822	9.525	762	114.6	132	149.3	79300.7	3.89	7.83	
21-3346	OZ	38.8	131.72	0.375	36	22.7	25.9	29.1	697.6	13.51	27.21	B1
		2083.6	3345.8	9.525	914	110.7	126.4	142.1	95261.8	4.12	8.29	
21-2670	OZ	39	105.1	0.5	24	25.6	29.4	33.1	467.7	11.97	24.13	A2
		2095.4	2669.6	12.7	609	125	143.3	161.7	63869	3.65	7.36	
21-3003	OZ	39.3	118.21	0.472	28	24.9	28.5	32.1	550	12.49	25.18	B2
		2112.2	3002.6	12	711	121.6	139.2	156.7	75108.8	3.81	7.67	
21-3041	OZ	39.3	119.72	0.75	24	29.3	32.9	36.4	471.5	11.93	24.07	B1
		2112.4	3041	19.05	609	143.1	160.4	177.7	64385.1	3.64	7.34	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
21-3104	OZ	39.5	122.21	0.394	31	23.5	27	30.5	631.3	13.01	26.23	B2
		2121.2	3104.2	10	812	114.7	131.7	148.7	86207.3	3.97	7.99	
21-2301	OZ	39.5	90.59	0.438	24	25	28.5	32	474.2	9.24	18.49	B3
		2124.3	2301	11.112	609	122.2	139.2	156.1	64750.1	2.82	5.64	
21-2962	OZ	39.6	116.61	0.472	30	25.5	28.8	32.2	594.4	12.72	25.64	A1
		2130.4	2962	12	762	124.3	140.8	157.3	81167.1	3.88	7.81	
21-3053	OZ	39.8	120.21	0.438	30	24.4	28	31.5	597.6	12.75	25.7	B2
		2142	3053.4	11.112	762	119.2	136.5	153.7	81610.2	3.89	7.83	
21-2810	OZ	40	110.61	0.688	24	29.3	32.8	36.4	479.7	11.93	24.07	A1
		2149.3	2809.6	17.462	609	142.8	160.2	177.6	65511.4	3.64	7.34	
22-3244	OZ	40	127.72	0.472	31	24.9	28.2	31.6	640.2	12.98	26.16	B1
		2151.1	3244.2	12	812	121.7	137.9	154.1	87422.2	3.96	7.97	
22-2822	OZ	40	111.1	0.394	30	24.1	27.7	31.2	600.5	12.75	25.7	A2
		2152.4	2822	10	762	117.7	135.1	152.4	82005.9	3.89	7.83	
22-2070	OZ	40.2	81.48	0.375	24	24.4	27.9	31.4	482.1	9.24	18.49	A3
		2160	2069.6	9.525	609	119.2	136.2	153.3	65835.8	2.82	5.64	
22-3064	OZ	40.2	120.61	0.394	34	23.9	27.1	30.4	683.2	13.24	26.68	A1
		2160.8	3063.6	10	863	116.5	132.4	148.3	93301.7	4.04	8.13	
22-2403	OZ	40.2	94.59	0.375	28	24	27.4	30.7	562.8	9.77	19.54	B3
		2161.3	2402.6	9.525	711	117.4	133.6	149.9	76856	2.98	5.95	
22-3346	OZ	40.4	131.72	0.394	36	23.3	26.5	29.8	726.8	13.51	27.21	B1
		2171	3345.8	10	914	113.8	129.5	145.3	99257	4.12	8.29	
22-2771	OZ	40.4	109.1	0.438	28	25	28.6	32.3	565.9	12.49	25.18	A2
		2173.3	2771.2	11.112	711	122.2	139.8	157.5	77283.4	3.81	7.67	
22-3013	OZ	40.5	118.61	0.438	31	24.9	28.2	31.5	647.6	12.98	26.16	A1
		2176.2	3012.8	11.112	812	121.5	137.7	153.9	88440	3.96	7.97	
22-3155	OZ	40.6	124.21	0.375	34	23.3	26.7	30.1	690.4	13.28	26.75	B2
		2183.4	3155	9.525	863	113.7	130.4	147.2	94279.8	4.05	8.15	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
22-3295	OZ	40.8	129.72	0.438	34	24.3	27.6	30.9	693.3	13.24	26.68	B1
		2192.6	3295	11.112	863	118.8	134.7	150.7	94678	4.04	8.13	
22-3003	OZ	40.8	118.21	0.5	28	25.7	29.3	32.9	571.7	12.49	25.18	B2
		2195.5	3002.6	12.7	711	125.5	143.1	160.7	78070.6	3.81	7.67	
22-2901	OZ	41	114.21	0.625	24	27.6	31.3	35	492.1	11.97	24.13	B2
		2204.9	2901	15.875	609	134.7	152.8	171	67205	3.65	7.36	
22-2873	OZ	41.1	113.1	0.375	31	23.9	27.4	30.9	658.4	13.01	26.23	A2
		2212.3	2872.8	9.525	812	116.8	133.8	150.8	89909.7	3.97	7.99	
22-2070	OZ	41.3	81.48	0.394	24	25.1	28.6	32.1	495.7	9.24	18.49	A3
		2220.7	2069.6	10	609	122.5	139.6	156.6	67687.6	2.82	5.64	
22-2301	OZ	41.4	90.59	0.472	24	26.2	29.6	33.1	496.5	9.24	18.49	B3
		2224.6	2301	12	609	127.8	144.8	161.7	67805.8	2.82	5.64	
22-2962	OZ	41.4	116.61	0.5	30	26.3	29.7	33.1	621.6	12.72	25.64	A1
		2228	2962	12.7	762	128.6	145.1	161.6	84886.5	3.88	7.81	
22-2403	OZ	41.5	94.59	0.394	28	24.7	28.1	31.4	581.6	9.77	19.54	B3
		2233.5	2402.6	10	711	120.7	137	153.3	79424.9	2.98	5.95	
22-2911	OZ	41.6	114.61	0.562	28	27.6	31	34.4	582.4	12.46	25.11	A1
		2236.7	2911.2	14.288	711	134.6	151.4	168.1	79538.7	3.8	7.65	
22-3041	OZ	41.6	119.72	0.812	24	30.8	34.4	37.9	499.3	11.93	24.07	B1
		2236.9	3041	20.638	609	150.5	167.7	185	68179.9	3.64	7.34	
22-3114	OZ	41.6	122.61	0.375	36	23.6	26.8	30	749.4	13.51	27.21	A1
		2238.4	3114.4	9.525	914	115.2	130.9	146.6	102339.8	4.12	8.29	
22-3397	OZ	41.8	133.72	0.375	38	23.1	26.2	29.4	793.5	13.77	27.73	B1
		2245.4	3396.6	9.525	965	112.5	128	143.5	108365.4	4.2	8.45	
22-2670	OZ	41.8	105.1	0.562	24	27.4	31.1	34.9	501.5	11.97	24.13	A2
		2247	2669.6	14.288	609	133.6	151.9	170.2	68487.3	3.65	7.36	
22-3143	OZ	41.8	123.72	0.625	28	28	31.5	34.9	585.4	12.46	25.11	B1
		2248.3	3142.6	15.875	711	136.8	153.6	170.3	79948.1	3.8	7.65	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
23-3244	OZ	41.9	127.72	0.5	31	25.8	29.1	32.4	670.6	12.98	26.16	B1
		2253.2	3244.2	12.7	812	125.9	142.1	158.3	91569.9	3.96	7.97	
23-3053	OZ	42.1	120.21	0.472	30	25.5	29	32.6	631.3	12.75	25.7	B2
		2262.9	3053.4	12	762	124.5	141.8	159	86214.6	3.89	7.83	
23-3155	OZ	42.1	124.21	0.394	34	23.9	27.4	30.8	716.4	13.28	26.75	B2
		2265.8	3155	10	863	116.9	133.6	150.3	97835.1	4.05	8.15	
23-3193	OZ	42.2	125.72	0.562	30	27	30.4	33.8	633.3	12.72	25.64	B1
		2270	3193.4	14.288	762	131.9	148.4	164.8	86487.4	3.88	7.81	
23-2810	OZ	42.5	110.61	0.75	24	30.9	34.4	38	510.3	11.93	24.07	A1
		2286.3	2809.6	19.05	609	150.8	168.2	185.6	69687.8	3.64	7.34	
23-2771	OZ	42.6	109.1	0.472	28	26.1	29.8	33.4	595.9	12.49	25.18	A2
		2288.5	2771.2	12	711	127.6	145.3	162.9	81380.5	3.81	7.67	
23-2873	OZ	42.6	113.1	0.394	31	24.6	28.1	31.6	682.1	13.01	26.23	A2
		2292.1	2872.8	10	812	120	137	154.1	93151.2	3.97	7.99	
23-3104	OZ	42.7	122.21	0.438	31	24.9	28.4	31.9	682.4	13.01	26.23	B2
		2293.1	3104.2	11.112	812	121.7	138.7	155.7	93190.7	3.97	7.99	
23-2453	OZ	42.7	96.59	0.375	30	24.5	27.8	31.1	641.1	10.03	20.06	B3
		2298	2453.4	9.525	762	119.8	135.7	151.6	87553.3	3.06	6.11	
23-2301	OZ	42.8	90.59	0.5	24	27.1	30.5	34	514	9.24	18.49	B3
		2303	2301	12.7	609	132.2	149.1	166.1	70196.1	2.82	5.64	
23-3013	OZ	43.1	118.61	0.472	31	26.1	29.4	32.7	689.3	12.98	26.16	A1
		2316.4	3012.8	12	812	127.2	143.4	159.6	94136.7	3.96	7.97	
23-2822	OZ	43.1	111.1	0.438	30	25.6	29.1	32.7	646.6	12.75	25.7	A2
		2317.6	2822	11.112	762	124.9	142.3	159.6	88302.2	3.89	7.83	
23-3206	OZ	43.3	126.21	0.375	36	23.7	27.1	30.4	780.2	13.54	27.27	B2
		2330.4	3205.8	9.525	914	115.7	132.1	148.6	106543.7	4.13	8.31	
23-3114	OZ	43.4	122.61	0.394	36	24.3	27.5	30.7	780.8	13.51	27.21	A1
		2332.3	3114.4	10	914	118.6	134.3	149.9	106631.8	4.12	8.29	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
23-3092	OZ	43.5	121.72	0.75	26	30.4	33.9	37.4	565.2	12.2	24.59	B1
		2337.3	3091.8	19.05	660	148.5	165.5	182.5	77176.5	3.72	7.49	
23-3295	OZ	43.5	129.72	0.472	34	25.5	28.7	32	739.3	13.24	26.68	B1
		2338.1	3295	12	863	124.4	140.3	156.3	100958.1	4.04	8.13	
23-2901	OZ	43.5	114.21	0.688	24	29.2	32.9	36.6	522.2	11.97	24.13	B2
		2339.8	2901	17.462	609	142.4	160.6	178.8	71317.4	3.65	7.36	
23-3397	OZ	43.6	133.72	0.394	38	23.7	26.9	30.1	827.6	13.77	27.73	B1
		2341.7	3396.6	10	965	115.8	131.3	146.8	113009.8	4.2	8.45	
24-2924	OZ	43.8	115.1	0.375	34	24.3	27.8	31.2	745	13.28	26.75	A2
		2356.2	2923.6	9.525	863	118.8	135.6	152.3	101741.9	4.05	8.15	
24-3053	OZ	43.9	120.21	0.5	30	26.4	29.9	33.4	657.8	12.75	25.7	B2
		2357.6	3053.4	12.7	762	128.7	145.9	163.2	89822.7	3.89	7.83	
24-3064	OZ	43.9	120.61	0.438	34	25.4	28.7	31.9	745.7	13.24	26.68	A1
		2358.2	3063.6	11.112	863	124	140	155.9	101829.2	4.04	8.13	
24-3041	OZ	43.9	119.72	0.875	24	32.3	35.9	39.4	526.6	11.93	24.07	B1
		2359.3	3041	22.225	609	157.7	175	192.3	71911.5	3.64	7.34	
24-2070	OZ	43.9	81.48	0.438	24	26.7	30.2	33.7	527.2	9.24	18.49	A3
		2361.9	2069.6	11.112	609	130.3	147.4	164.4	71989.8	2.82	5.64	
24-3346	OZ	44.2	131.72	0.438	36	24.8	28	31.3	795	13.51	27.21	B1
		2374.6	3345.8	11.112	914	121.1	136.9	152.6	108564.8	4.12	8.29	
24-2771	OZ	44.2	109.1	0.5	28	27	30.6	34.2	619.4	12.49	25.18	A2
		2378.8	2771.2	12.7	711	131.9	149.6	167.2	84589.6	3.81	7.67	
24-2453	OZ	44.3	96.59	0.394	30	25.3	28.5	31.8	663.9	10.03	20.06	B3
		2379.7	2453.4	10	762	123.3	139.3	155.2	90664.9	3.06	6.11	
24-3003	OZ	44.3	118.21	0.562	28	27.5	31.1	34.7	620.4	12.49	25.18	B2
		2382.5	3002.6	14.288	711	134.5	152	169.6	84721.1	3.81	7.67	
24-2171	OZ	44.5	85.48	0.375	28	25.5	28.8	32.2	622.8	9.77	19.54	A3
		2391.6	2171.2	9.525	711	124.6	140.8	157.1	85047.1	2.98	5.95	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	
24-2670	OZ	44.6	105.1	0.625	24	29.1	32.8	36.6	534.8	11.97	24.13	A2
		2396	2669.6	15.875	609	142	160.4	178.7	73030.3	3.65	7.36	
24-2403	OZ	44.7	94.59	0.438	28	26.3	29.7	33	625.4	9.77	19.54	B3
		2401.6	2402.6	11.112	711	128.6	144.9	161.1	85400.9	2.98	5.95	
24-3165	OZ	44.8	124.61	0.375	38	24	27.2	30.3	851.6	13.77	27.73	A1
		2409.6	3165.2	9.525	965	117.2	132.6	148	116287.7	4.2	8.45	
24-3447	OZ	44.9	135.72	0.375	40	23.4	26.5	29.7	898.4	14.03	28.25	B1
		2415.1	3447.4	9.525	1016	114.3	129.6	144.9	122688.1	4.28	8.61	
24-2810	OZ	45	110.61	0.812	24	32.5	36.1	39.6	540.4	11.93	24.07	A1
		2421.1	2809.6	20.638	609	158.8	176.1	193.5	73795.2	3.64	7.34	
24-3206	OZ	45	126.21	0.394	36	24.4	27.7	31.1	810.7	13.54	27.27	B2
		2421.6	3205.8	10	914	118.9	135.4	151.8	110713.3	4.13	8.31	
24-3143	OZ	45	123.72	0.688	28	29.8	33.2	36.6	630.7	12.46	25.11	B1
		2422	3142.6	17.462	711	145.3	162	178.7	86127.1	3.8	7.65	
24-3013	OZ	45.1	118.61	0.5	31	27	30.3	33.6	722.1	12.98	26.16	A1
		2426.3	3012.8	12.7	812	131.8	147.9	164.1	98602.9	3.96	7.97	
24-2911	OZ	45.1	114.61	0.625	28	29.4	32.9	36.3	632	12.46	25.11	A1
		2427	2911.2	15.875	711	143.8	160.5	177.3	86302.9	3.8	7.65	
24-3104	OZ	45.2	122.21	0.472	31	26.1	29.6	33	722.9	13.01	26.23	B2
		2429.1	3104.2	12	812	127.3	144.3	161.3	98719.7	3.97	7.99	
24-2924	OZ	45.5	115.1	0.394	34	25	28.5	31.9	773.1	13.28	26.75	A2
		2445.1	2923.6	10	863	122.2	138.9	155.7	105578.6	4.05	8.15	
24-2962	OZ	45.5	116.61	0.562	30	28.3	31.7	35.1	682.8	12.72	25.64	A1
		2447.4	2962	14.288	762	138.4	154.8	171.3	93244.1	3.88	7.81	
24-2822	OZ	45.5	111.1	0.472	30	26.8	30.3	33.9	683.1	12.75	25.7	A2
		2448.4	2822	12	762	130.7	148	165.3	93284.1	3.89	7.83	
24-2504	OZ	45.6	98.59	0.375	31	25	28.2	31.4	729	10.29	20.58	B3
		2449.7	2504.2	9.525	812	122.1	137.7	153.3	99556.4	3.14	6.27	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
25-3295	OZ	45.6	129.72	0.5	34	26.4	29.6	32.9	775.4	13.24	26.68	B1
		2452.1	3295	12.7	863	128.8	144.7	160.7	105883.4	4.04	8.13	
25-3155	OZ	45.7	124.21	0.438	34	25.4	28.9	32.3	777.1	13.28	26.75	B2
		2457.5	3155	11.112	863	124.2	140.9	157.6	106115.6	4.05	8.15	
25-3193	OZ	46	125.72	0.625	30	28.9	32.2	35.6	689.4	12.72	25.64	B1
		2470.9	3193.4	15.875	762	140.9	157.3	173.8	94139.5	3.88	7.81	
25-2171	OZ	46	85.48	0.394	28	26.3	29.6	32.9	643.6	9.77	19.54	A3
		2471.6	2171.2	10	711	128.3	144.6	160.8	87889.7	2.98	5.95	
25-2901	OZ	46	114.21	0.75	24	30.8	34.5	38.2	551.9	11.97	24.13	B2
		2472.5	2901	19.05	609	150.2	168.3	186.5	75362.2	3.65	7.36	
25-2070	OZ	46	81.48	0.472	24	28	31.5	34.9	552	9.24	18.49	A3
		2473.3	2069.6	12	609	136.5	153.6	170.6	75387.1	2.82	5.64	
25-2873	OZ	46.1	113.1	0.438	31	26.1	29.6	33.1	737.4	13.01	26.23	A2
		2477.8	2872.8	11.112	812	127.6	144.6	161.6	100697.1	3.97	7.99	
25-2301	OZ	46.1	90.59	0.562	24	29.1	32.6	36.1	553.3	9.24	18.49	B3
		2478.8	2301	14.288	609	142.1	159.1	176	75554.2	2.82	5.64	
25-3041	OZ	46.1	119.72	0.938	24	33.8	37.3	40.9	553.5	11.93	24.07	B1
		2479.7	3041	23.812	609	165	182.3	199.6	75580.7	3.64	7.34	
25-3244	OZ	46.2	127.72	0.562	31	27.7	31	34.4	738.8	12.98	26.16	B1
		2482.6	3244.2	14.288	812	135.4	151.6	167.8	100894.2	3.96	7.97	
25-3257	OZ	46.3	128.21	0.375	38	24.1	27.4	30.7	879	13.8	27.8	B2
		2487.2	3256.6	9.525	965	117.5	133.7	149.9	120034.6	4.21	8.47	
25-2974	OZ	46.7	117.1	0.375	36	24.7	28.1	31.5	840.9	13.54	27.27	A2
		2511.6	2974.4	9.525	914	120.8	137.3	153.7	114832.5	4.13	8.31	
25-3165	OZ	46.7	124.61	0.394	38	24.7	27.9	31	888.1	13.77	27.73	A1
		2512.9	3165.2	10	965	120.7	136.1	151.5	121271.6	4.2	8.45	
25-3064	OZ	46.8	120.61	0.472	34	26.6	29.9	33.2	795.1	13.24	26.68	A1
		2514.7	3063.6	12	863	130	146	161.9	108583.7	4.04	8.13	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
25-3447	OZ	46.9	135.72	0.394	40	24.1	27.2	30.4	937.6	14.03	28.25	B1
		2520.5	3447.4	10	1016	117.7	133	148.2	128042	4.28	8.61	
25-2860	OZ	47	112.61	0.75	26	32.1	35.5	39	610.9	12.2	24.59	A1
		2526.3	2860.4	19.05	660	156.5	173.6	190.6	83419.9	3.72	7.49	
25-2403	OZ	47.1	94.59	0.472	28	27.6	31	34.3	660	9.77	19.54	B3
		2534.5	2402.6	12	711	134.9	151.1	167.4	90126.6	2.98	5.95	
25-3104	OZ	47.2	122.21	0.5	31	27	30.5	33.9	754.7	13.01	26.23	B2
		2535.8	3104.2	12.7	812	131.7	148.7	165.7	103054.5	3.97	7.99	
25-3346	OZ	47.2	131.72	0.472	36	26	29.2	32.4	849	13.51	27.21	B1
		2535.9	3345.8	12	914	127	142.7	158.4	115940	4.12	8.29	
25-2222	OZ	47.2	87.48	0.375	30	26	29.3	32.5	707.9	10.03	20.06	A3
		2537.3	2222	9.525	762	127.1	143	158.9	96671.1	3.06	6.11	
25-2504	OZ	47.3	98.59	0.394	31	25.8	29	32.2	756.3	10.29	20.58	B3
		2541.2	2504.2	10	812	125.8	141.4	157	103275	3.14	6.27	
25-2670	OZ	47.3	105.1	0.688	24	30.8	34.6	38.3	567.5	11.97	24.13	A2
		2542.6	2669.6	17.462	609	150.5	168.8	187.2	77499.1	3.65	7.36	
26-2822	OZ	47.4	111.1	0.5	30	27.7	31.2	34.8	711.7	12.75	25.7	A2
		2550.9	2822	12.7	762	135.2	152.5	169.8	97188.1	3.89	7.83	
26-3114	OZ	47.4	122.61	0.438	36	25.9	29.1	32.3	854.1	13.51	27.21	A1
		2551	3114.4	11.112	914	126.5	142.1	157.8	116631.1	4.12	8.29	
26-2810	OZ	47.5	110.61	0.875	24	34.1	37.7	41.2	570	11.93	24.07	A1
		2553.6	2809.6	22.225	609	166.7	184	201.4	77834.2	3.64	7.34	
26-2070	OZ	47.6	81.48	0.5	24	29	32.5	35.9	571.5	9.24	18.49	A3
		2560.5	2069.6	12.7	609	141.4	158.5	175.5	78044.6	2.82	5.64	
26-3397	OZ	47.7	133.72	0.438	38	25.3	28.5	31.6	906.8	13.77	27.73	B1
		2566	3396.6	11.112	965	123.4	138.9	154.4	123832.9	4.2	8.45	
26-3003	OZ	47.7	118.21	0.625	28	29.4	33	36.6	668.4	12.49	25.18	B2
		2566.9	3002.6	15.875	711	143.3	160.9	178.5	91279.5	3.81	7.67	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
26-2453	OZ	47.8	96.59	0.438	30	27	30.2	33.5	717	10.03	20.06	B3
		2569.7	2453.4	11.112	762	131.6	147.6	163.5	97907.1	3.06	6.11	
26-3053	OZ	47.8	120.21	0.562	30	28.3	31.8	35.4	717.1	12.75	25.7	B2
		2570.3	3053.4	14.288	762	138.1	155.4	172.6	97930.1	3.89	7.83	
26-2771	OZ	48	109.1	0.562	28	29	32.6	36.2	672.2	12.49	25.18	A2
		2581.4	2771.2	14.288	711	141.6	159.2	176.9	91795.5	3.81	7.67	
26-3257	OZ	48.1	128.21	0.394	38	24.8	28.1	31.4	914.5	13.8	27.8	B2
		2587.6	3256.6	10	965	120.9	137.1	153.3	124878.6	4.21	8.47	
26-3216	OZ	48.2	126.61	0.375	40	24.4	27.5	30.6	963.1	14.03	28.25	A1
		2588.9	3216	9.525	1016	119	134.2	149.4	131515.8	4.28	8.61	
26-3498	OZ	48.2	137.72	0.375	42	23.8	26.9	29.9	1012.5	14.29	28.78	B1
		2592.1	3498.2	9.525	1066	116.1	131.1	146.2	138261.4	4.36	8.77	
26-3143	OZ	48.2	123.72	0.75	28	31.5	34.9	38.3	675.3	12.46	25.11	B1
		2593.3	3142.6	19.05	711	153.7	170.4	187.1	92219.5	3.8	7.65	
26-3041	OZ	48.3	119.72	1	24	35.3	38.8	42.4	579.9	11.93	24.07	B1
		2598	3041	25.4	609	172.2	189.5	206.8	79188.4	3.64	7.34	
26-2901	OZ	48.4	114.21	0.812	24	32.3	36.1	39.8	581	11.97	24.13	B2
		2603	2901	20.638	609	157.9	176	194.2	79340.1	3.65	7.36	
26-3155	OZ	48.5	124.21	0.472	34	26.6	30.1	33.5	825.1	13.28	26.75	B2
		2609.4	3155	12	863	130	146.7	163.5	112674.4	4.05	8.15	
26-2974	OZ	48.5	117.1	0.394	36	25.5	28.8	32.2	873.8	13.54	27.27	A2
		2609.9	2974.4	10	914	124.3	140.8	157.2	119326.5	4.13	8.31	
26-2911	OZ	48.6	114.61	0.688	28	31.3	34.7	38.2	680.8	12.46	25.11	A1
		2614.5	2911.2	17.462	711	152.9	169.7	186.4	92973	3.8	7.65	
26-2555	OZ	48.6	100.59	0.375	34	25.5	28.6	31.7	826.8	10.55	21.11	B3
		2614.7	2555	9.525	863	124.4	139.7	155	112903.8	3.22	6.43	
26-2873	OZ	48.8	113.1	0.472	31	27.4	30.8	34.3	781.1	13.01	26.23	A2
		2624.8	2872.8	12	812	133.6	150.6	167.6	106671.4	3.97	7.99	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
26-2222	OZ	48.9	87.48	0.394	30	26.8	30.1	33.3	733.1	10.03	20.06	A3
		2627.5	2222	10	762	131	146.9	162.8	100106.8	3.06	6.11	
26-3206	OZ	49	126.21	0.438	36	25.9	29.3	32.7	881.9	13.54	27.27	B2
		2634	3205.8	11.112	914	126.6	143	159.5	120427.6	4.13	8.31	
26-3064	OZ	49.1	120.61	0.5	34	27.6	30.9	34.1	833.9	13.24	26.68	A1
		2637.4	3063.6	12.7	863	134.8	150.7	166.6	113881	4.04	8.13	
26-2403	OZ	49.1	94.59	0.5	28	28.6	32	35.3	687.1	9.77	19.54	B3
		2638.6	2402.6	12.7	711	139.8	156.1	172.3	93828	2.98	5.95	
27-2301	OZ	49.3	90.59	0.625	24	31.1	34.6	38.1	591.9	9.24	18.49	B3
		2651.7	2301	15.875	609	151.9	168.9	185.9	80824.9	2.82	5.64	
27-2924	OZ	49.3	115.1	0.438	34	26.6	30.1	33.5	838.6	13.28	26.75	A2
		2652	2923.6	11.112	863	130.1	146.8	163.6	114514.5	4.05	8.15	
27-3307	OZ	49.4	130.21	0.375	40	24.4	27.7	31	987	14.06	28.32	B2
		2653.2	3307.4	9.525	1016	119.3	135.3	151.2	134784.3	4.29	8.63	
27-2171	OZ	49.4	85.48	0.438	28	28.1	31.4	34.7	692	9.77	19.54	A3
		2657.6	2171.2	11.112	711	137.1	153.3	169.5	94502.7	2.98	5.95	
27-3346	OZ	49.5	131.72	0.5	36	26.9	30.2	33.4	891.4	13.51	27.21	B1
		2662.4	3345.8	12.7	914	131.6	147.3	163	121726	4.12	8.29	
27-2962	OZ	49.5	116.61	0.625	30	30.3	33.7	37.1	743.2	12.72	25.64	A1
		2663.9	2962	15.875	762	148	164.5	181	101493.9	3.88	7.81	
27-3193	OZ	49.6	125.72	0.688	30	30.7	34.1	37.4	744.7	12.72	25.64	B1
		2669.1	3193.4	17.462	762	149.8	166.3	182.8	101692.2	3.88	7.81	
27-3013	OZ	49.7	118.61	0.562	31	29.1	32.4	35.7	795.6	12.98	26.16	A1
		2673.3	3012.8	14.288	812	142	158.2	174.3	108643.4	3.96	7.97	
27-3025	OZ	49.8	119.1	0.375	38	25.1	28.4	31.8	946.2	13.8	27.8	A2
		2677.5	3025.2	9.525	965	122.7	138.9	155.1	129216.2	4.21	8.47	
27-2952	OZ	49.9	116.21	0.75	26	31.9	35.5	39.2	648.6	12.23	24.65	B2
		2682.4	2951.8	19.05	660	155.7	173.5	191.4	88571.3	3.73	7.51	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
27-2810	OZ	49.9	110.61	0.938	24	35.7	39.3	42.9	599	11.93	24.07	A1
		2683.9	2809.6	23.812	609	174.5	191.9	209.3	81805.6	3.64	7.34	
27-2670	OZ	50	105.1	0.75	24	32.5	36.3	40.1	599.7	11.97	24.13	A2
		2686.8	2669.6	19.05	609	158.9	177.2	195.6	81894.6	3.65	7.36	
27-2273	OZ	50.2	89.48	0.375	31	26.5	29.7	32.9	803.3	10.29	20.58	A3
		2699.1	2272.8	9.525	812	129.5	145.1	160.6	109692.5	3.14	6.27	
27-3216	OZ	50.3	126.61	0.394	40	25.1	28.2	31.3	1005.1	14.03	28.25	A1
		2701.9	3216	10	1016	122.6	137.8	153	137255	4.28	8.61	
27-3498	OZ	50.3	137.72	0.394	42	24.5	27.6	30.7	1057.3	14.29	28.78	B1
		2706.9	3498.2	10	1066	119.6	134.6	149.7	144386	4.36	8.77	
27-3295	OZ	50.4	129.72	0.562	34	28.4	31.7	34.9	856.5	13.24	26.68	B1
		2708.7	3295	14.288	863	138.7	154.7	170.6	116962	4.04	8.13	
27-3244	OZ	50.4	127.72	0.625	31	29.7	33	36.3	806.3	12.98	26.16	B1
		2709.3	3244.2	15.875	812	144.8	161	177.2	110106.3	3.96	7.97	
27-2555	OZ	50.5	100.59	0.394	34	26.3	29.4	32.5	858.9	10.55	21.11	B3
		2716.4	2555	10	863	128.2	143.5	158.8	117294	3.22	6.43	
27-2453	OZ	50.6	96.59	0.472	30	28.3	31.6	34.8	758.9	10.03	20.06	B3
		2720.1	2453.4	12	762	138.2	154.1	170.1	103637.5	3.06	6.11	
27-3114	OZ	50.7	122.61	0.472	36	27.2	30.4	33.6	912.1	13.51	27.21	A1
		2724.3	3114.4	12	914	132.7	148.4	164.1	124554.3	4.12	8.29	
27-3155	OZ	50.8	124.21	0.5	34	27.6	31	34.4	862.8	13.28	26.75	B2
		2728.5	3155	12.7	863	134.6	151.3	168	117818.3	4.05	8.15	
27-2901	OZ	50.8	114.21	0.875	24	33.9	37.6	41.3	609.6	11.97	24.13	B2
		2731.4	2901	22.225	609	165.5	183.7	201.9	83251.9	3.65	7.36	
27-2873	OZ	51	113.1	0.5	31	28.3	31.8	35.3	815.4	13.01	26.23	A2
		2740	2872.8	12.7	812	138.3	155.3	172.4	111355.4	3.97	7.99	
27-3397	OZ	51	133.72	0.472	38	26.5	29.7	32.9	969.6	13.77	27.73	B1
		2743.7	3396.6	12	965	129.5	145	160.5	132412.4	4.2	8.45	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
27-3003	OZ	51.1	118.21	0.688	28	31.2	34.8	38.4	715.8	12.49	25.18	B2
		2748.8	3002.6	17.462	711	152.2	169.8	187.3	97746.5	3.81	7.67	
28-3165	OZ	51.2	124.61	0.438	38	26.4	29.5	32.7	973.1	13.77	27.73	A1
		2753.5	3165.2	11.112	965	128.8	144.3	159.7	132886.1	4.2	8.45	
28-2504	OZ	51.2	98.59	0.438	31	27.6	30.7	33.9	819.7	10.29	20.58	B3
		2754.2	2504.2	11.112	812	134.5	150.1	165.7	111931.6	3.14	6.27	
28-2070	OZ	51.3	81.48	0.562	24	31.2	34.7	38.2	615.1	9.24	18.49	A3
		2756	2069.6	14.288	609	152.4	169.5	186.5	84001.8	2.82	5.64	
28-3143	OZ	51.4	123.72	0.812	28	33.2	36.6	40	719.3	12.46	25.11	B1
		2762.3	3142.6	20.638	711	162	178.8	195.5	98226.3	3.8	7.65	
28-3307	OZ	51.4	130.21	0.394	40	25.2	28.4	31.7	1027.9	14.06	28.32	B2
		2763.1	3307.4	10	1016	122.8	138.8	154.7	140364.9	4.29	8.63	
28-3447	OZ	51.5	135.72	0.438	40	25.7	28.9	32	1029	14.03	28.25	B1
		2766.2	3447.4	11.112	1016	125.7	140.9	156.2	140521.2	4.28	8.61	
28-3104	OZ	51.6	122.21	0.562	31	29	32.5	36	826	13.01	26.23	B2
		2775.6	3104.2	14.288	812	141.6	158.6	175.6	112799.3	3.97	7.99	
28-3267	OZ	51.6	128.61	0.375	42	24.7	27.8	30.9	1084.2	14.29	28.78	A1
		2775.7	3266.8	9.525	1066	120.8	135.8	150.7	148055	4.36	8.77	
28-3549	OZ	51.6	139.72	0.375	43	24.1	27.2	30.2	1135.9	14.55	29.3	B1
		2775.8	3549	9.525	1117	117.8	132.6	147.4	155113.8	4.44	8.93	
28-3053	OZ	51.7	120.21	0.625	30	30.2	33.7	37.3	775.7	12.75	25.7	B2
		2780.4	3053.4	15.875	762	147.5	164.7	182	105933	3.89	7.83	
28-2822	OZ	51.7	111.1	0.562	30	29.8	33.3	36.9	775.9	12.75	25.7	A2
		2781.1	2822	14.288	762	145.4	162.7	180	105960.2	3.89	7.83	
28-2771	OZ	51.7	109.1	0.625	28	31	34.6	38.2	724.2	12.49	25.18	A2
		2781.3	2771.2	15.875	711	151.2	168.8	186.5	98901.5	3.81	7.67	
28-3025	OZ	51.8	119.1	0.394	38	25.9	29.2	32.5	984.4	13.8	27.8	A2
		2785.6	3025.2	10	965	126.4	142.6	158.7	134430.7	4.21	8.47	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
28-2606	OZ	51.9	102.59	0.375	36	25.9	29	32.1	934.6	10.81	21.63	B3
		2791.5	2605.8	9.525	914	126.5	141.5	156.5	127628.4	3.3	6.59	
28-2911	OZ	52.1	114.61	0.75	28	33.2	36.6	40	729	12.46	25.11	A1
		2799.5	2911.2	19.05	711	162	178.7	195.5	99549.7	3.8	7.65	
28-2273	OZ	52.1	89.48	0.394	31	27.4	30.5	33.7	833.3	10.29	20.58	A3
		2799.9	2272.8	10	812	133.6	149.1	164.6	113789.7	3.14	6.27	
28-3206	OZ	52.1	126.21	0.472	36	27.2	30.5	33.9	938.2	13.54	27.27	B2
		2802.4	3205.8	12	914	132.7	149.1	165.6	128124.9	4.13	8.31	
28-2171	OZ	52.2	85.48	0.472	28	29.5	32.8	36.1	730.3	9.77	19.54	A3
		2804.6	2171.2	12	711	144	160.2	176.5	99732	2.98	5.95	
28-2810	OZ	52.3	110.61	1	24	37.3	40.9	44.5	627.6	11.93	24.07	A1
		2812	2809.6	25.4	609	182.3	199.7	217.1	85710.4	3.64	7.34	
28-2924	OZ	52.4	115.1	0.472	34	27.9	31.4	34.8	890.4	13.28	26.75	A2
		2815.9	2923.6	12	863	136.4	153.1	169.9	121592.5	4.05	8.15	
28-3257	OZ	52.5	128.21	0.438	38	26.4	29.7	33	997.1	13.8	27.8	B2
		2821.5	3256.6	11.112	965	128.9	145.1	161.3	136167.1	4.21	8.47	
28-2301	OZ	52.5	90.59	0.688	24	33.1	36.6	40.1	629.8	9.24	18.49	B3
		2821.8	2301	17.462	609	161.7	178.7	195.7	86009.6	2.82	5.64	
28-3358	OZ	52.6	132.21	0.375	42	24.8	28	31.2	1104.5	14.32	28.84	B2
		2827.6	3358.2	9.525	1066	121.1	136.8	152.5	150823.9	4.37	8.79	
28-2670	OZ	52.6	105.1	0.812	24	34.3	38	41.8	631.4	11.97	24.13	A2
		2828.7	2669.6	20.638	609	167.3	185.6	203.9	86217.3	3.65	7.36	
28-2222	OZ	52.8	87.48	0.438	30	28.7	32	35.2	791.6	10.03	20.06	A3
		2837.4	2222	11.112	762	140.2	156.1	171.9	108103.2	3.06	6.11	
28-2453	OZ	52.8	96.59	0.5	30	29.4	32.6	35.9	791.8	10.03	20.06	B3
		2838	2453.4	12.7	762	143.4	159.3	175.2	108128	3.06	6.11	
28-2974	OZ	52.8	117.1	0.438	36	27.2	30.5	33.9	950.5	13.54	27.27	A2
		2838.9	2974.4	11.112	914	132.6	149	165.5	129796.5	4.13	8.31	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
29-3076	OZ	53.1	121.1	0.375	40	25.5	28.8	32	1061.3	14.06	28.32	A2
		2852.8	3076	9.525	1016	124.6	140.5	156.4	144923.8	4.29	8.63	
29-2901	OZ	53.2	114.21	0.938	24	35.5	39.2	42.9	637.8	11.97	24.13	B2
		2857.6	2901	23.812	609	173.1	191.3	209.5	87098.1	3.65	7.36	
29-3114	OZ	53.2	122.61	0.5	36	28.2	31.4	34.6	957.6	13.51	27.21	A1
		2860.2	3114.4	12.7	914	137.7	153.3	169	130770.3	4.12	8.29	
29-3193	OZ	53.3	125.72	0.75	30	32.5	35.9	39.3	799.3	12.72	25.64	B1
		2864.7	3193.4	19.05	762	158.7	175.2	191.6	109146.3	3.88	7.81	
29-2403	OZ	53.4	94.59	0.562	28	30.9	34.3	37.6	748	9.77	19.54	B3
		2872.3	2402.6	14.288	711	151	167.2	183.5	102139.4	2.98	5.95	
29-2324	OZ	53.5	91.48	0.375	34	27	30.1	33.2	909.1	10.55	21.11	A3
		2875.1	2323.6	9.525	863	131.8	147	162.2	124147.5	3.22	6.43	
29-2962	OZ	53.5	116.61	0.688	30	32.3	35.7	39	802.9	12.72	25.64	A1
		2877.6	2962	17.462	762	157.7	174.1	190.6	109636.7	3.88	7.81	
29-3397	OZ	53.6	133.72	0.5	38	27.5	30.7	33.8	1018.9	13.77	27.73	B1
		2883.2	3396.6	12.7	965	134.3	149.8	165.2	139145	4.2	8.45	
29-3267	OZ	53.9	128.61	0.394	42	25.5	28.6	31.6	1132.2	14.29	28.78	A1
		2898.6	3266.8	10	1066	124.6	139.5	154.4	154613.4	4.36	8.77	
29-3549	OZ	53.9	139.72	0.394	43	24.9	27.9	30.9	1186.8	14.55	29.3	B1
		2900.4	3549	10	1117	121.4	136.2	151.1	162073	4.44	8.93	
29-2606	OZ	54	102.59	0.394	36	26.7	29.8	32.9	972.2	10.81	21.63	B3
		2903.7	2605.8	10	914	130.6	145.5	160.5	132758.2	3.3	6.59	
29-2720	OZ	54.1	107.1	0.75	26	33.7	37.4	41.1	703.8	12.23	24.65	A2
		2910.5	2720.4	19.05	660	164.7	182.7	200.7	96105.3	3.73	7.51	
29-3064	OZ	54.2	120.61	0.562	34	29.8	33.1	36.3	921.2	13.24	26.68	A1
		2913.3	3063.6	14.288	863	145.5	161.4	177.3	125796.4	4.04	8.13	
29-3013	OZ	54.3	118.61	0.625	31	31.2	34.5	37.8	868.2	12.98	26.16	A1
		2917.4	3012.8	15.875	812	152.1	168.3	184.5	118563.1	3.96	7.97	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
29-2171	OZ	54.3	85.48	0.5	28	30.6	33.9	37.3	760.3	9.77	19.54	A3
		2919.8	2171.2	12.7	711	149.5	165.7	181.9	103827.9	2.98	5.95	
29-2504	OZ	54.4	98.59	0.472	31	29	32.2	35.4	869.8	10.29	20.58	B3
		2922.9	2504.2	12	812	141.4	157	172.6	118785.3	3.14	6.27	
29-3003	OZ	54.5	118.21	0.75	28	33	36.6	40.2	762.5	12.49	25.18	B2
		2928.1	3002.6	19.05	711	161	178.5	196.1	104123	3.81	7.67	
29-3143	OZ	54.5	123.72	0.875	28	34.9	38.3	41.7	762.7	12.46	25.11	B1
		2928.8	3142.6	22.225	711	170.4	187.1	203.8	104148.5	3.8	7.65	
29-3244	OZ	54.6	127.72	0.688	31	31.6	34.9	38.2	872.9	12.98	26.16	B1
		2933.2	3244.2	17.462	812	154.2	170.4	186.6	119206.6	3.96	7.97	
29-3206	OZ	54.6	126.21	0.5	36	28.2	31.5	34.9	982.5	13.54	27.27	B2
		2934.5	3205.8	12.7	914	137.4	153.9	170.3	134163.6	4.13	8.31	
29-3165	OZ	54.8	124.61	0.472	38	27.7	30.9	34	1040.5	13.77	27.73	A1
		2944.3	3165.2	12	965	135.4	150.8	166.2	142092.7	4.2	8.45	
29-2924	OZ	54.8	115.1	0.5	34	29	32.4	35.8	931.1	13.28	26.75	A2
		2944.5	2923.6	12.7	863	141.4	158.1	174.8	127143.5	4.05	8.15	
29-3358	OZ	54.8	132.21	0.394	42	25.5	28.8	32	1151.2	14.32	28.84	B2
		2947.2	3358.2	10	1066	124.7	140.4	156.1	157203.8	4.37	8.79	
29-3346	OZ	54.8	131.72	0.562	36	29.1	32.3	35.5	986.7	13.51	27.21	B1
		2947.2	3345.8	14.288	914	141.9	157.7	173.4	134747.4	4.12	8.29	
29-2070	OZ	54.8	81.48	0.625	24	33.5	37	40.4	658	9.24	18.49	A3
		2948.2	2069.6	15.875	609	163.4	180.4	197.5	89861.9	2.82	5.64	
30-2555	OZ	54.9	100.59	0.438	34	28.1	31.3	34.4	933.8	10.55	21.11	B3
		2953.2	2555	11.112	863	137.3	152.6	167.9	127519.1	3.22	6.43	
30-3447	OZ	55.1	135.72	0.472	40	27	30.2	33.3	1101.5	14.03	28.25	B1
		2961	3447.4	12	1016	132	147.2	162.5	150416.8	4.28	8.61	
30-3295	OZ	55.1	129.72	0.625	34	30.4	33.7	37	936.7	13.24	26.68	B1
		2962.4	3295	15.875	863	148.6	164.6	180.5	127915.3	4.04	8.13	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
30-3216	OZ	55.2	126.61	0.438	40	26.9	30	33.1	1103.1	14.03	28.25	A1
		2965.2	3216	11.112	1016	131.1	146.3	161.5	150632.1	4.28	8.61	
30-2670	OZ	55.2	105.1	0.875	24	36	39.7	43.5	662.5	11.97	24.13	A2
		2968.1	2669.6	22.225	609	175.6	193.9	212.2	90468.1	3.65	7.36	
30-3318	OZ	55.2	130.61	0.375	43	25.1	28.1	31.1	1215.1	14.55	29.3	A1
		2969.5	3317.6	9.525	1117	122.6	137.3	152	165932.9	4.44	8.93	
30-3076	OZ	55.3	121.1	0.394	40	26.3	29.5	32.8	1105.2	14.06	28.32	A2
		2970.9	3076	10	1016	128.4	144.3	160.2	150924.2	4.29	8.63	
30-3498	OZ	55.3	137.72	0.438	42	26.2	29.3	32.3	1161.9	14.29	28.78	B1
		2974.6	3498.2	11.112	1066	127.8	142.8	157.9	158665.9	4.36	8.77	
30-2771	OZ	55.4	109.1	0.688	28	32.9	36.5	40.2	775.6	12.49	25.18	A2
		2978.3	2771.2	17.462	711	160.8	178.4	196.1	105908.5	3.81	7.67	
30-2657	OZ	55.4	104.59	0.375	38	26.3	29.4	32.4	1052.8	11.08	22.15	B3
		2978.9	2656.6	9.525	965	128.6	143.3	158	143763.2	3.38	6.75	
30-2901	OZ	55.5	114.21	1	24	37	40.7	44.5	665.5	11.97	24.13	B2
		2981.6	2901	25.4	609	180.7	198.9	217	90879.9	3.65	7.36	
30-2911	OZ	55.5	114.61	0.812	28	35	38.5	41.9	776.5	12.46	25.11	A1
		2981.8	2911.2	20.638	711	171	187.8	204.5	106033.9	3.8	7.65	
30-2324	OZ	55.6	91.48	0.394	34	27.9	31	34.1	944.5	10.55	21.11	A3
		2986.9	2323.6	10	863	136.1	151.3	166.4	128975	3.22	6.43	
30-3053	OZ	55.6	120.21	0.688	30	32.1	35.7	39.2	833.6	12.75	25.7	B2
		2987.7	3053.4	17.462	762	156.8	174.1	191.4	113832	3.89	7.83	
30-2301	OZ	55.6	90.59	0.75	24	35.1	38.6	42.1	667.2	9.24	18.49	B3
		2989.1	2301	19.05	609	171.5	188.5	205.4	91109.2	2.82	5.64	
30-3155	OZ	55.7	124.21	0.562	34	29.7	33.1	36.5	947.5	13.28	26.75	B2
		2996.5	3155	14.288	863	145	161.7	178.4	129388.5	4.05	8.15	
30-2873	OZ	55.8	113.1	0.562	31	30.5	34	37.5	892.5	13.01	26.23	A2
		2999.1	2872.8	14.288	812	149	166.1	183.1	121885.2	3.97	7.99	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
30-2222	OZ	55.9	87.48	0.472	30	30.2	33.5	36.7	838	10.03	20.06	A3
		3003.4	2222	12	762	147.5	163.3	179.2	114430.3	3.06	6.11	
30-3257	OZ	55.9	128.21	0.472	38	27.7	31	34.3	1062.7	13.8	27.8	B2
		3006.9	3256.6	12	965	135.2	151.4	167.6	145115.4	4.21	8.47	
30-2822	OZ	56	111.1	0.625	30	31.9	35.4	39	839.3	12.75	25.7	A2
		3008.4	2822	15.875	762	155.5	172.9	190.2	114619.3	3.89	7.83	
30-3409	OZ	56	134.21	0.375	43	25.1	28.3	31.5	1231.6	14.59	29.37	B2
		3009.7	3409	9.525	1117	122.8	138.2	153.7	168181.2	4.45	8.95	
30-3104	OZ	56	122.21	0.625	31	31	34.5	38	896.5	13.01	26.23	B2
		3012.5	3104.2	15.875	812	151.5	168.5	185.4	122426.9	3.97	7.99	
30-3307	OZ	56.2	130.21	0.438	40	26.9	30.1	33.4	1123.1	14.06	28.32	B2
		3019.1	3307.4	11.112	1016	131.1	147	163	153372.3	4.29	8.63	
30-2974	OZ	56.2	117.1	0.472	36	28.5	31.9	35.2	1011.2	13.54	27.27	A2
		3020.4	2974.4	12	914	139.1	155.6	172	138092.6	4.13	8.31	
30-2273	OZ	56.4	89.48	0.438	31	29.3	32.5	35.7	903.1	10.29	20.58	A3
		3034.6	2272.8	11.112	812	143.2	158.7	174.2	123327.7	3.14	6.27	
30-3127	OZ	56.5	123.1	0.375	42	25.9	29.1	32.3	1186.2	14.32	28.84	A2
		3036.9	3126.8	9.525	1066	126.4	142	157.7	161985.6	4.37	8.79	
30-3025	OZ	56.5	119.1	0.438	38	27.6	31	34.3	1073.4	13.8	27.8	A2
		3037.4	3025.2	11.112	965	134.9	151.1	167.3	146582.6	4.21	8.47	
31-2504	OZ	56.8	98.59	0.5	31	30.1	33.3	36.5	909.2	10.29	20.58	B3
		3055.1	2504.2	12.7	812	146.9	162.5	178	124158.7	3.14	6.27	
31-3193	OZ	56.9	125.72	0.812	30	34.3	37.7	41.1	853.1	12.72	25.64	B1
		3057.8	3193.4	20.638	762	167.6	184	200.5	116503.4	3.88	7.81	
31-2374	OZ	57	93.48	0.375	36	27.5	30.5	33.5	1025.7	10.81	21.63	A3
		3063.6	2374.4	9.525	914	134.1	148.9	163.7	140066.6	3.3	6.59	
31-2962	OZ	57.4	116.61	0.75	30	34.3	37.6	41	861.7	12.72	25.64	A1
		3088.5	2962	19.05	762	167.2	183.7	200.2	117673.2	3.88	7.81	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
31-3143	OZ	57.5	123.72	0.938	28	36.6	40	43.4	805.4	12.46	25.11	B1
		3093	3142.6	23.812	711	178.7	195.4	212.1	109986.6	3.8	7.65	
31-3165	OZ	57.5	124.61	0.5	38	28.8	31.9	35.1	1093.4	13.77	27.73	A1
		3094	3165.2	12.7	965	140.5	155.9	171.3	149317.6	4.2	8.45	
31-2657	OZ	57.7	104.59	0.394	38	27.2	30.2	33.2	1096.2	11.08	22.15	B3
		3102	2656.6	10	965	132.8	147.5	162.2	149701.2	3.38	6.75	
31-3318	OZ	57.7	130.61	0.394	43	25.9	28.9	31.9	1269.6	14.55	29.3	A1
		3102.7	3317.6	10	1117	126.4	141.1	155.9	173377.4	4.44	8.93	
31-2403	OZ	57.7	94.59	0.625	28	33.2	36.5	39.9	808	9.77	19.54	B3
		3102.8	2402.6	15.875	711	162.1	178.3	194.6	110335.6	2.98	5.95	
31-2453	OZ	57.7	96.59	0.562	30	31.8	35	38.3	865.7	10.03	20.06	B3
		3102.8	2453.4	14.288	762	155.1	171.1	187	118218.1	3.06	6.11	
31-3003	OZ	57.8	118.21	0.812	28	34.8	38.4	42	808.5	12.49	25.18	B2
		3104.9	3002.6	20.638	711	169.7	187.3	204.9	110409.9	3.81	7.67	
31-2670	OZ	57.8	105.1	0.938	24	37.7	41.4	45.2	693.1	11.97	24.13	A2
		3105.2	2669.6	23.812	609	183.8	202.2	220.5	94647.8	3.65	7.36	
31-3447	OZ	57.9	135.72	0.5	40	28	31.2	34.3	1158.4	14.03	28.25	B1
		3113.9	3447.4	12.7	1016	136.9	152.2	167.4	158184.1	4.28	8.61	
31-2222	OZ	58.3	87.48	0.5	30	31.4	34.6	37.9	874.3	10.03	20.06	A3
		3133.6	2222	12.7	762	153.2	169.1	184.9	119388.5	3.06	6.11	
31-2070	OZ	58.4	81.48	0.688	24	35.7	39.2	42.7	700.3	9.24	18.49	A3
		3137.3	2069.6	17.462	609	174.3	191.3	208.4	95626.3	2.82	5.64	
31-3409	OZ	58.4	134.21	0.394	43	25.9	29.1	32.3	1284.6	14.59	29.37	B2
		3139.3	3409	10	1117	126.5	142	157.5	175426.1	4.45	8.95	
31-2555	OZ	58.4	100.59	0.472	34	29.6	32.7	35.9	993.1	10.55	21.11	B3
		3140.8	2555	12	863	144.5	159.8	175.1	135618.1	3.22	6.43	
32-3257	OZ	58.6	128.21	0.5	38	28.7	32	35.3	1114.1	13.8	27.8	B2
		3152.5	3256.6	12.7	965	140.2	156.4	172.6	152137.4	4.21	8.47	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
32-2301	OZ	58.7	90.59	0.812	24	37.1	40.6	44.1	703.9	9.24	18.49	B3
		3153.7	2301	20.638	609	181.2	198.2	215.1	96124.4	2.82	5.64	
32-3244	OZ	58.7	127.72	0.75	31	33.5	36.8	40.1	938.8	12.98	26.16	B1
		3154.4	3244.2	19.05	812	163.6	179.8	196	128195.8	3.96	7.97	
32-3013	OZ	58.7	118.61	0.688	31	33.2	36.5	39.9	940	12.98	26.16	A1
		3158.5	3012.8	17.462	812	162.3	178.5	194.6	128362.3	3.96	7.97	
32-2911	OZ	58.8	114.61	0.875	28	36.9	40.3	43.7	823.3	12.46	25.11	A1
		3161.6	2911.2	22.225	711	180	196.7	213.5	112426.8	3.8	7.65	
32-3651	OZ	58.8	143.72	0.375	48	24.8	27.7	30.7	1411.6	15.08	30.35	B1
		3162.2	3650.6	9.525	1219	121.1	135.5	149.9	192766.7	4.6	9.25	
32-2974	OZ	58.8	117.1	0.5	36	29.6	32.9	36.3	1058.9	13.54	27.27	A2
		3162.8	2974.4	12.7	914	144.3	160.7	177.2	144601.2	4.13	8.31	
32-2606	OZ	58.9	102.59	0.438	36	28.7	31.7	34.8	1059.7	10.81	21.63	B3
		3165.1	2605.8	11.112	914	140	154.9	169.9	144709.2	3.3	6.59	
32-3127	OZ	58.9	123.1	0.394	42	26.7	29.9	33.1	1236.4	14.32	28.84	A2
		3165.3	3126.8	10	1066	130.3	145.9	161.6	168837.7	4.37	8.79	
32-3114	OZ	58.9	122.61	0.562	36	30.5	33.7	36.9	1060	13.51	27.21	A1
		3166.2	3114.4	14.288	914	148.8	164.5	180.2	144759.2	4.12	8.29	
32-2771	OZ	59	109.1	0.75	28	34.9	38.5	42.1	826.1	12.49	25.18	A2
		3172.6	2771.2	19.05	711	170.3	188	205.6	112817.4	3.81	7.67	
32-3216	OZ	59	126.61	0.472	40	28.2	31.3	34.5	1180.7	14.03	28.25	A1
		3174	3216	12	1016	137.9	153.1	168.2	161239.7	4.28	8.61	
32-2707	OZ	59.1	106.59	0.375	40	26.7	29.7	32.7	1181.4	11.34	22.68	B3
		3175.9	2707.4	9.525	1016	130.6	145	159.5	161336.4	3.46	6.91	
32-2171	OZ	59.1	85.48	0.562	28	33.1	36.5	39.8	827.7	9.77	19.54	A3
		3178.4	2171.2	14.288	711	161.8	178	194.3	113025.1	2.98	5.95	
32-3267	OZ	59.2	128.61	0.438	42	27.3	30.4	33.4	1244.2	14.29	28.78	A1
		3185.3	3266.8	11.112	1066	133.4	148.3	163.2	169904.8	4.36	8.77	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
32-3064	OZ	59.3	120.61	0.625	34	32	35.2	38.5	1007.5	13.24	26.68	A1
		3186.1	3063.6	15.875	863	156.1	172	187.9	137577	4.04	8.13	
32-2374	OZ	59.3	93.48	0.394	36	28.4	31.4	34.4	1066.9	10.81	21.63	A3
		3186.7	2374.4	10	914	138.5	153.3	168.2	145696.3	3.3	6.59	
32-3498	OZ	59.3	137.72	0.472	42	27.5	30.6	33.7	1244.8	14.29	28.78	B1
		3187	3498.2	12	1066	134.3	149.4	164.4	169992.3	4.36	8.77	
32-3549	OZ	59.3	139.72	0.438	43	26.6	29.6	32.7	1305.7	14.55	29.3	B1
		3190.8	3549	11.112	1117	129.9	144.7	159.5	178300.9	4.44	8.93	
32-3053	OZ	59.4	120.21	0.75	30	34	37.6	41.1	890.7	12.75	25.7	B2
		3192.3	3053.4	19.05	762	166.1	183.4	200.7	121627.9	3.89	7.83	
32-3397	OZ	59.5	133.72	0.562	38	29.7	32.9	36.1	1129.9	13.77	27.73	B1
		3197.3	3396.6	14.288	965	145.1	160.6	176.1	154302.8	4.2	8.45	
32-3295	OZ	59.8	129.72	0.688	34	32.5	35.7	39	1016	13.24	26.68	B1
		3213.2	3295	17.462	863	158.5	174.4	190.4	138743.8	4.04	8.13	
32-2273	OZ	59.9	89.48	0.472	31	30.9	34.1	37.2	958.4	10.29	20.58	A3
		3220.5	2272.8	12	812	150.8	166.3	181.8	130879.2	3.14	6.27	
32-3307	OZ	59.9	130.21	0.472	40	28.2	31.5	34.7	1198.7	14.06	28.32	B2
		3222.2	3307.4	12	1016	137.7	153.6	169.6	163686.8	4.29	8.63	
32-3358	OZ	60	132.21	0.438	42	27.3	30.5	33.7	1260.1	14.32	28.84	B2
		3226.1	3358.2	11.112	1066	133.3	149	164.7	172079	4.37	8.79	
32-3178	OZ	60.1	125.1	0.375	43	26.2	29.4	32.5	1321.3	14.59	29.37	A2
		3228.9	3177.6	9.525	1117	128.1	143.5	158.9	180428.5	4.45	8.95	
32-3346	OZ	60.1	131.72	0.625	36	31.2	34.4	37.6	1081.1	13.51	27.21	B1
		3229	3345.8	15.875	914	152.3	168	183.7	147629.3	4.12	8.29	
32-3206	OZ	60.1	126.21	0.562	36	30.4	33.7	37.1	1082	13.54	27.27	B2
		3231.7	3205.8	14.288	914	148.3	164.7	181.2	147753.7	4.13	8.31	
32-2822	OZ	60.1	111.1	0.688	30	33.9	37.5	41	901.9	12.75	25.7	A2
		3232.7	2822	17.462	762	165.6	183	200.3	123166.1	3.89	7.83	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
32-2924	OZ	60.1	115.1	0.562	34	31.2	34.7	38.1	1022.5	13.28	26.75	A2
		3233.7	2923.6	14.288	863	152.6	169.3	186	139629.5	4.05	8.15	
32-3025	OZ	60.2	119.1	0.472	38	29	32.3	35.7	1143.9	13.8	27.8	A2
		3237	3025.2	12	965	141.8	157.9	174.1	156215.4	4.21	8.47	
32-2670	OZ	60.3	105.1	1	24	39.3	43.1	46.8	723.2	11.97	24.13	A2
		3240.1	2669.6	25.4	609	192.1	210.4	228.7	98757.4	3.65	7.36	
32-3076	OZ	60.4	121.1	0.438	40	28.1	31.4	34.6	1207.6	14.06	28.32	A2
		3246.3	3076	11.112	1016	137.2	153.1	169.1	164910.2	4.29	8.63	
32-3104	OZ	60.4	122.21	0.688	31	33	36.5	40	966.2	13.01	26.23	B2
		3246.5	3104.2	17.462	812	161.3	178.3	195.3	131937.6	3.97	7.99	
32-2324	OZ	60.4	91.48	0.438	34	29.9	33	36.1	1026.8	10.55	21.11	A3
		3247.3	2323.6	11.112	863	146	161.2	176.4	140218.3	3.22	6.43	
32-3193	OZ	60.4	125.72	0.875	30	36.1	39.5	42.9	906.3	12.72	25.64	B1
		3248.4	3193.4	22.225	762	176.4	192.8	209.3	123763.7	3.88	7.81	
33-2352	OZ	60.5	92.59	0.75	26	36.4	39.8	43.2	786.1	9.51	19.01	B3
		3251	2351.8	19.05	660	177.9	194.5	211.2	107348.2	2.9	5.79	
33-3143	OZ	60.5	123.72	1	28	38.3	41.7	45.1	847.6	12.46	25.11	B1
		3254.8	3142.6	25.4	711	186.9	203.6	220.4	115741.4	3.8	7.65	
33-2873	OZ	60.5	113.1	0.625	31	32.7	36.2	39.7	968.7	13.01	26.23	A2
		3255.1	2872.8	15.875	812	159.7	176.7	193.8	132288.3	3.97	7.99	
33-3155	OZ	60.7	124.21	0.625	34	31.8	35.2	38.7	1031.3	13.28	26.75	B2
		3261.4	3155	15.875	863	155.3	172.1	188.8	140827.8	4.05	8.15	
33-2425	OZ	60.7	95.48	0.375	38	27.9	30.9	33.8	1153.2	11.08	22.15	A3
		3263.2	2425.2	9.525	965	136.2	150.7	165.2	157480.3	3.38	6.75	
33-3003	OZ	61	118.21	0.875	28	36.6	40.1	43.7	853.9	12.49	25.18	B2
		3279.2	3002.6	22.225	711	178.5	196	213.6	116608.2	3.81	7.67	
33-2555	OZ	61.2	100.59	0.5	34	30.8	33.9	37	1039.6	10.55	21.11	B3
		3287.9	2555	12.7	863	150.2	165.4	180.7	141969.9	3.22	6.43	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	
33-2962	OZ	61.3	116.61	0.812	30	36.2	39.6	43	919.8	12.72	25.64	A1
		3296.7	2962	20.638	762	176.8	193.3	209.7	125605	3.88	7.81	
33-3651	OZ	61.5	143.72	0.394	48	25.6	28.5	31.5	1476.2	15.08	30.35	B1
		3306.9	3650.6	10	1219	124.9	139.3	153.7	201589	4.6	9.25	
33-2707	OZ	61.6	106.59	0.394	40	27.6	30.6	33.5	1231.4	11.34	22.68	B3
		3310.1	2707.4	10	1016	134.9	149.3	163.8	168153.7	3.46	6.91	
33-2301	OZ	61.7	90.59	0.875	24	39.1	42.6	46	740	9.24	18.49	B3
		3315.5	2301	22.225	609	190.8	207.8	224.8	101056.1	2.82	5.64	
33-2070	OZ	61.8	81.48	0.75	24	37.9	41.4	44.9	741.8	9.24	18.49	A3
		3323.4	2069.6	19.05	609	185.1	202.2	219.2	101296	2.82	5.64	
33-2403	OZ	61.9	94.59	0.688	28	35.5	38.8	42.1	867.2	9.77	19.54	B3
		3330.1	2402.6	17.462	711	173.1	189.4	205.6	118417.6	2.98	5.95	
33-3216	OZ	62.1	126.61	0.5	40	29.3	32.4	35.5	1241.7	14.03	28.25	A1
		3337.9	3216	12.7	1016	143.2	158.4	173.6	169565.9	4.28	8.61	
33-2911	OZ	62.1	114.61	0.938	28	38.7	42.1	45.6	869.4	12.46	25.11	A1
		3338.8	2911.2	23.812	711	188.9	205.7	222.4	118729	3.8	7.65	
34-2504	OZ	62.4	98.59	0.562	31	32.6	35.8	39	997.7	10.29	20.58	B3
		3352.3	2504.2	14.288	812	159.1	174.7	190.3	136238.4	3.14	6.27	
34-3498	OZ	62.4	137.72	0.5	42	28.6	31.6	34.7	1309.9	14.29	28.78	B1
		3353.7	3498.2	12.7	1066	139.5	154.5	169.5	178885.1	4.36	8.77	
34-3701	OZ	62.6	145.72	0.375	50	25.1	28	30.9	1564.3	15.34	30.87	B1
		3364.1	3701.4	9.525	1270	122.6	136.8	151	213617.5	4.67	9.41	
34-2771	OZ	62.6	109.1	0.812	28	36.8	40.4	44.1	876	12.49	25.18	A2
		3364.2	2771.2	20.638	711	179.8	197.4	215.1	119629.3	3.81	7.67	
34-2453	OZ	62.6	96.59	0.625	30	34.2	37.4	40.7	938.6	10.03	20.06	B3
		3364.3	2453.4	15.875	762	166.8	182.7	198.7	128178.1	3.06	6.11	
34-2273	OZ	62.6	89.48	0.5	31	32.1	35.3	38.5	1001.8	10.29	20.58	A3
		3366.1	2272.8	12.7	812	156.8	172.3	187.8	136799.6	3.14	6.27	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
34-3178	OZ	62.6	125.1	0.394	43	27.1	30.2	33.4	1378.2	14.59	29.37	A2
		3368	3177.6	10	1117	132.2	147.5	162.9	188201.1	4.45	8.95	
34-2606	OZ	62.7	102.59	0.472	36	30.2	33.3	36.3	1129	10.81	21.63	B3
		3372.2	2605.8	12	914	147.4	162.4	177.4	154178.8	3.3	6.59	
34-3244	OZ	62.7	127.72	0.812	31	35.4	38.7	42.1	1003.8	12.98	26.16	B1
		3372.9	3244.2	20.638	812	172.9	189.1	205.3	137075.7	3.96	7.97	
34-3419	OZ	62.8	134.61	0.375	48	25.8	28.7	31.6	1507.1	15.08	30.35	A1
		3376.2	3419.2	9.525	1219	125.9	140.2	154.4	205812.5	4.6	9.25	
34-3307	OZ	62.9	130.21	0.5	40	29.3	32.5	35.8	1257.9	14.06	28.32	B2
		3381.6	3307.4	12.7	1016	142.8	158.8	174.7	171782.9	4.29	8.63	
34-2758	OZ	62.9	108.59	0.375	42	27.1	30	32.9	1320.9	11.6	23.2	B3
		3381.6	2758.2	9.525	1066	132.5	146.7	160.8	180376	3.54	7.07	
34-2657	OZ	63	104.59	0.438	38	29.2	32.2	35.2	1197.6	11.08	22.15	B3
		3388.7	2656.6	11.112	965	142.5	157.2	171.9	163539.2	3.38	6.75	
34-3025	OZ	63.1	119.1	0.5	38	30.1	33.4	36.8	1199.3	13.8	27.8	A2
		3393.6	3025.2	12.7	965	147.1	163.3	179.5	163774.5	4.21	8.47	
34-3053	OZ	63.1	120.21	0.812	30	35.9	39.5	43	947	12.75	25.7	B2
		3394.3	3053.4	20.638	762	175.4	192.7	209.9	129322.3	3.89	7.83	
34-3511	OZ	63.1	138.21	0.375	48	25.8	28.9	32	1515.5	15.11	30.41	B2
		3395	3510.6	9.525	1219	126	141	156	206957.4	4.61	9.27	
34-3013	OZ	63.2	118.61	0.75	31	35.3	38.6	41.9	1010.9	12.98	26.16	A1
		3396.7	3012.8	19.05	812	172.3	188.5	204.7	138042	3.96	7.97	
34-2425	OZ	63.2	95.48	0.394	38	28.8	31.8	34.8	1200.8	11.08	22.15	A3
		3397.9	2425.2	10	965	140.7	155.3	169.8	163984.9	3.38	6.75	
34-3267	OZ	63.5	128.61	0.472	42	28.7	31.8	34.9	1333	14.29	28.78	A1
		3412.7	3266.8	12	1066	140.4	155.3	170.2	182033.5	4.36	8.77	
34-3318	OZ	63.5	130.61	0.438	43	27.8	30.8	33.8	1396.7	14.55	29.3	A1
		3413.3	3317.6	11.112	1117	135.5	150.2	164.9	190737.3	4.44	8.93	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
34-3549	OZ	63.6	139.72	0.472	43	28	31	34.1	1400	14.55	29.3	B1
		3421.2	3549	12	1117	136.6	151.5	166.3	191176.1	4.44	8.93	
34-2222	OZ	63.7	87.48	0.562	30	34	37.3	40.5	955.8	10.03	20.06	A3
		3426	2222	14.288	762	166.2	182	197.9	130529.3	3.06	6.11	
34-3165	OZ	63.8	124.61	0.562	38	31.2	34.3	37.5	1212.5	13.77	27.73	A1
		3431.1	3165.2	14.288	965	152.1	167.5	182.9	165583.5	4.2	8.45	
34-2171	OZ	63.9	85.48	0.625	28	35.7	39	42.3	894.1	9.77	19.54	A3
		3433.5	2171.2	15.875	711	174.1	190.3	206.5	122094.8	2.98	5.95	
34-3193	OZ	63.9	125.72	0.938	30	37.9	41.3	44.7	958.8	12.72	25.64	B1
		3436.4	3193.4	23.812	762	185.2	201.6	218.1	130928.5	3.88	7.81	
34-3409	OZ	64	134.21	0.438	43	27.7	30.9	34.1	1408.3	14.59	29.37	B2
		3441.7	3409	11.112	1117	135.4	150.8	166.3	192320.5	4.45	8.95	
34-3358	OZ	64.1	132.21	0.472	42	28.7	31.9	35.1	1346.5	14.32	28.84	B2
		3447.3	3358.2	12	1066	140.1	155.8	171.5	183877.6	4.37	8.79	
35-3003	OZ	64.2	118.21	0.938	28	38.3	41.9	45.5	898.6	12.49	25.18	B2
		3451	3002.6	23.812	711	187.1	204.7	222.3	122718.5	3.81	7.67	
35-2324	OZ	64.2	91.48	0.472	34	31.5	34.6	37.7	1092	10.55	21.11	A3
		3453.5	2323.6	12	863	154	169.1	184.3	149123.9	3.22	6.43	
35-2822	OZ	64.2	111.1	0.75	30	36	39.5	43.1	963.7	12.75	25.7	A2
		3454.1	2822	19.05	762	175.7	193	210.4	131601.2	3.89	7.83	
35-3064	OZ	64.3	120.61	0.688	34	34.1	37.4	40.7	1092.7	13.24	26.68	A1
		3455.8	3063.6	17.462	863	166.7	182.6	198.6	149223.4	4.04	8.13	
35-3447	OZ	64.3	135.72	0.562	40	30.3	33.5	36.6	1286.5	14.03	28.25	B1
		3458.2	3447.4	14.288	1016	148.1	163.4	178.7	175678.2	4.28	8.61	
35-3295	OZ	64.4	129.72	0.75	34	34.5	37.7	41	1094.4	13.24	26.68	B1
		3461.1	3295	19.05	863	168.3	184.3	200.2	149448.5	4.04	8.13	
35-3076	OZ	64.4	121.1	0.472	40	29.6	32.8	36.1	1288.8	14.06	28.32	A2
		3464.6	3076	12	1016	144.3	160.2	176.1	176000.6	4.29	8.63	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
35-3127	OZ	64.4	123.1	0.438	42	28.6	31.8	35	1353.4	14.32	28.84	A2
		3464.8	3126.8	11.112	1066	139.5	155.1	170.8	184813.8	4.37	8.79	
35-3114	OZ	64.5	122.61	0.625	36	32.8	36	39.2	1161.4	13.51	27.21	A1
		3468.9	3114.4	15.875	914	159.9	175.6	191.3	158598.1	4.12	8.29	
35-2476	OZ	64.6	97.48	0.375	40	28.3	31.2	34.1	1291.9	11.34	22.68	A3
		3472.7	2476	9.525	1016	138.2	152.4	166.7	176414.5	3.46	6.91	
35-2374	OZ	64.6	93.48	0.438	36	30.5	33.5	36.6	1163	10.81	21.63	A3
		3473.6	2374.4	11.112	914	148.8	163.6	178.5	158812	3.3	6.59	
35-2301	OZ	64.6	90.59	0.938	24	41	44.5	48	775.5	9.24	18.49	B3
		3474.6	2301	23.812	609	200.4	217.4	234.4	105905.3	2.82	5.64	
35-3104	OZ	64.7	122.21	0.75	31	35	38.5	42	1035	13.01	26.23	B2
		3477.7	3104.2	19.05	812	171.1	188.1	205.1	141332.3	3.97	7.99	
35-3257	OZ	64.7	128.21	0.562	38	31	34.3	37.7	1229.8	13.8	27.8	B2
		3480	3256.6	14.288	965	151.5	167.7	183.8	167946.8	4.21	8.47	
35-2974	OZ	64.8	117.1	0.562	36	31.9	35.3	38.7	1166.2	13.54	27.27	A2
		3483.1	2974.4	14.288	914	156	172.4	188.9	159248.5	4.13	8.31	
35-2962	OZ	65.1	116.61	0.875	30	38.2	41.5	44.9	977.1	12.72	25.64	A1
		3502.2	2962	22.225	762	186.3	202.8	219.2	133432.5	3.88	7.81	
35-2070	OZ	65.2	81.48	0.812	24	40.1	43.6	47.1	782.6	9.24	18.49	A3
		3506.3	2069.6	20.638	609	195.9	213	230	106872	2.82	5.64	
35-3346	OZ	65.2	131.72	0.688	36	33.3	36.5	39.7	1174.4	13.51	27.21	B1
		3507.7	3345.8	17.462	914	162.6	178.3	194	160373	4.12	8.29	
35-2873	OZ	65.2	113.1	0.688	31	34.9	38.4	41.9	1044	13.01	26.23	A2
		3508	2872.8	17.462	812	170.3	187.3	204.4	142565	3.97	7.99	
35-3397	OZ	65.3	133.72	0.625	38	31.9	35.1	38.3	1239.8	13.77	27.73	B1
		3508.2	3396.6	15.875	965	155.9	171.4	186.8	169307.2	4.2	8.45	
35-2911	OZ	65.4	114.61	1	28	40.5	44	47.4	914.9	12.46	25.11	A1
		3513.5	2911.2	25.4	711	197.8	214.6	231.3	124941.2	3.8	7.65	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
35-3701	OZ	65.5	145.72	0.394	50	25.9	28.8	31.7	1636.4	15.34	30.87	B1
		3519.2	3701.4	10	1270	126.6	140.8	155	223471.4	4.67	9.41	
35-2924	OZ	65.5	115.1	0.625	34	33.5	37	40.4	1112.9	13.28	26.75	A2
		3519.6	2923.6	15.875	863	163.7	180.5	197.2	151974.2	4.05	8.15	
35-3155	OZ	65.5	124.21	0.688	34	33.9	37.3	40.8	1114.1	13.28	26.75	B2
		3523.3	3155	17.462	863	165.6	182.4	199.1	152136.8	4.05	8.15	
35-3206	OZ	65.6	126.21	0.625	36	32.6	36	39.3	1180.4	13.54	27.27	B2
		3525.8	3205.8	15.875	914	159.1	175.5	192	161198	4.13	8.31	
35-2758	OZ	65.6	108.59	0.394	42	28.1	31	33.9	1377.7	11.6	23.2	B3
		3527.3	2758.2	10	1066	137	151.1	165.3	188143.8	3.54	7.07	
35-3419	OZ	65.7	134.61	0.394	48	26.6	29.6	32.5	1576.1	15.08	30.35	A1
		3530.7	3419.2	10	1219	130	144.3	158.6	215231.9	4.6	9.25	
35-2606	OZ	65.7	102.59	0.5	36	31.4	34.5	37.5	1183.4	10.81	21.63	B3
		3534.7	2605.8	12.7	914	153.3	168.3	183.3	161608	3.3	6.59	
35-3511	OZ	65.9	138.21	0.394	48	26.6	29.7	32.8	1582.7	15.11	30.41	B2
		3545.5	3510.6	10	1219	130	145	160.1	216131.6	4.61	9.27	
36-2771	OZ	66.1	109.1	0.875	28	38.8	42.4	46	925.2	12.49	25.18	A2
		3553	2771.2	22.225	711	189.2	206.9	224.5	126345.2	3.81	7.67	
36-2403	OZ	66.1	94.59	0.75	28	37.7	41	44.4	925.5	9.77	19.54	B3
		3554.2	2402.6	19.05	711	184.1	200.4	216.6	126386.5	2.98	5.95	
36-3752	OZ	66.4	147.72	0.375	52	25.4	28.3	31.2	1727.1	15.6	31.4	B1
		3571.3	3752.2	9.525	1320	124.1	138.2	152.2	235849.1	4.75	9.57	
36-3470	OZ	66.7	136.61	0.375	50	26.1	29	31.9	1668.6	15.34	30.87	A1
		3588.4	3470	9.525	1270	127.5	141.6	155.6	227862.8	4.67	9.41	
36-3244	OZ	66.8	127.72	0.875	31	37.3	40.6	44	1068	12.98	26.16	B1
		3588.7	3244.2	22.225	812	182.2	198.4	214.6	145846.4	3.96	7.97	
36-3267	OZ	66.8	128.61	0.5	42	29.9	32.9	36	1402.7	14.29	28.78	A1
		3591.2	3266.8	12.7	1066	145.9	160.8	175.7	191556.2	4.36	8.77	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
36-3053	OZ	66.8	120.21	0.875	30	37.8	41.3	44.9	1002.6	12.75	25.7	B2
		3593.6	3053.4	22.225	762	184.6	201.9	219.1	136915.5	3.89	7.83	
36-2809	OZ	66.9	110.59	0.375	43	27.5	30.4	33.2	1471.2	11.86	23.72	B3
		3595.3	2809	9.525	1117	134.4	148.3	162.2	200906.4	3.62	7.23	
36-3561	OZ	66.9	140.21	0.375	50	26.1	29.2	32.2	1672.7	15.37	30.94	B2
		3597.3	3561.4	9.525	1270	127.6	142.4	157.2	228425.5	4.68	9.43	
36-3549	OZ	67	139.72	0.5	43	29.1	32.1	35.1	1474	14.55	29.3	B1
		3602.1	3549	12.7	1117	142	156.8	171.6	201287.1	4.44	8.93	
36-2120	OZ	67.1	83.48	0.75	26	39.3	42.7	46.1	871.9	9.51	19.01	A3
		3605.8	2120.4	19.05	660	192	208.6	225.2	119063.1	2.9	5.79	
36-2324	OZ	67.2	91.48	0.5	34	32.8	35.9	39	1143.2	10.55	21.11	A3
		3615.3	2323.6	12.7	863	160.2	175.4	190.5	156108.3	3.22	6.43	
36-2657	OZ	67.3	104.59	0.472	38	30.8	33.8	36.8	1277.9	11.08	22.15	B3
		3616	2656.6	12	965	150.3	165	179.7	174508.5	3.38	6.75	
36-2555	OZ	67.3	100.59	0.562	34	33.4	36.5	39.6	1144.2	10.55	21.11	B3
		3618.7	2555	14.288	863	163	178.3	193.6	156257.2	3.22	6.43	
36-2476	OZ	67.3	97.48	0.394	40	29.3	32.2	35.1	1346.4	11.34	22.68	A3
		3619.5	2476	10	1016	142.9	157.1	171.4	183868.8	3.46	6.91	
36-3003	OZ	67.3	118.21	1	28	40.1	43.7	47.3	942.8	12.49	25.18	B2
		3620.4	3002.6	25.4	711	195.8	213.3	230.9	128741.7	3.81	7.67	
36-3358	OZ	67.3	132.21	0.5	42	29.8	33	36.2	1414.3	14.32	28.84	B2
		3620.9	3358.2	12.7	1066	145.4	161.1	176.8	193141.2	4.37	8.79	
36-3193	OZ	67.4	125.72	1	30	39.7	43.1	46.5	1010.5	12.72	25.64	B1
		3622	3193.4	25.4	762	193.9	210.4	226.8	137998	3.88	7.81	
36-2453	OZ	67.4	96.59	0.688	30	36.5	39.8	43.1	1010.6	10.03	20.06	B3
		3622.3	2453.4	17.462	762	178.4	194.4	210.3	138009	3.06	6.11	
36-2707	OZ	67.4	106.59	0.438	40	29.7	32.7	35.6	1347.7	11.34	22.68	B3
		3622.9	2707.4	11.112	1016	145	159.4	173.8	184043.8	3.46	6.91	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
36-2301	OZ	67.5	90.59	1	24	43	46.5	50	810.4	9.24	18.49	B3
		3631	2301	25.4	609	210	226.9	243.9	110673.3	2.82	5.64	
36-3013	OZ	67.6	118.61	0.812	31	37.4	40.7	44	1080.9	12.98	26.16	A1
		3632	3012.8	20.638	812	182.4	198.6	214.8	147603.9	3.96	7.97	
36-3279	OZ	67.6	129.1	0.375	48	26.9	30	33	1622.5	15.11	30.41	A2
		3634.5	3279.2	9.525	1219	131.4	146.3	161.2	221561.6	4.61	9.27	
36-3076	OZ	67.6	121.1	0.5	40	30.7	34	37.2	1352.6	14.06	28.32	A2
		3635.9	3076	12.7	1016	149.9	165.8	181.7	184705.7	4.29	8.63	
36-3651	OZ	67.8	143.72	0.438	48	27.4	30.4	33.3	1626.9	15.08	30.35	B1
		3644.5	3650.6	11.112	1219	133.9	148.3	162.7	222169.8	4.6	9.25	
36-2504	OZ	67.8	98.59	0.625	31	35.1	38.3	41.5	1085	10.29	20.58	B3
		3646	2504.2	15.875	812	171.4	187	202.6	148172.7	3.14	6.27	
37-3318	OZ	68.1	130.61	0.472	43	29.2	32.2	35.3	1497.6	14.55	29.3	A1
		3659.8	3317.6	12	1117	142.7	157.4	172.1	204510.5	4.44	8.93	
37-2822	OZ	68.3	111.1	0.812	30	38	41.6	45.1	1024.7	12.75	25.7	A2
		3672.6	2822	20.638	762	185.7	203.1	220.4	139926.5	3.89	7.83	
37-3409	OZ	68.5	134.21	0.472	43	29.2	32.3	35.5	1506.5	14.59	29.37	B2
		3681.5	3409	12	1117	142.4	157.9	173.3	205724.5	4.45	8.95	
37-2171	OZ	68.5	85.48	0.688	28	38.2	41.5	44.8	959.6	9.77	19.54	A3
		3685	2171.2	17.462	711	186.3	202.5	218.8	131038.2	2.98	5.95	
37-2070	OZ	68.6	81.48	0.875	24	42.3	45.8	49.3	822.8	9.24	18.49	A3
		3686.2	2069.6	22.225	609	206.6	223.7	240.7	112355.1	2.82	5.64	
37-2527	OZ	68.7	99.48	0.375	42	28.7	31.6	34.4	1441.8	11.6	23.2	A3
		3691.3	2526.8	9.525	1066	140.1	154.1	168	196894.6	3.54	7.07	
37-3178	OZ	68.7	125.1	0.438	43	29	32.2	35.3	1510.9	14.59	29.37	A2
		3692.3	3177.6	11.112	1117	141.6	157	172.4	206325.8	4.45	8.95	
37-2273	OZ	68.7	89.48	0.562	31	34.9	38.1	41.2	1099.2	10.29	20.58	A3
		3693.6	2272.8	14.288	812	170.3	185.8	201.3	150109.2	3.14	6.27	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
37-2374	OZ	68.8	93.48	0.472	36	32.2	35.2	38.2	1239.1	10.81	21.63	A3
		3700.9	2374.4	12	914	157	171.8	186.7	169204.5	3.3	6.59	
37-3127	OZ	68.9	123.1	0.472	42	30.1	33.3	36.5	1446.2	14.32	28.84	A2
		3702.4	3126.8	12	1066	146.8	162.4	178.1	197485.5	4.37	8.79	
37-2962	OZ	68.9	116.61	0.938	30	40.1	43.5	46.8	1033.7	12.72	25.64	A1
		3704.9	2962	23.812	762	195.8	212.2	228.7	141157	3.88	7.81	
37-3104	OZ	68.9	122.21	0.812	31	37	40.5	44	1102.9	13.01	26.23	B2
		3706	3104.2	20.638	812	180.8	197.8	214.8	150612.6	3.97	7.99	
37-3295	OZ	68.9	129.72	0.812	34	36.5	39.7	43	1171.9	13.24	26.68	B1
		3706.1	3295	20.638	863	178.1	194	210	160030.3	4.04	8.13	
37-3216	OZ	69	126.61	0.562	40	31.8	34.9	38	1379	14.03	28.25	A1
		3707.1	3216	14.288	1016	155.3	170.4	185.6	188318.7	4.28	8.61	
37-2425	OZ	69	95.48	0.438	38	31	34	37	1311.8	11.08	22.15	A3
		3712	2425.2	11.112	965	151.4	165.9	180.5	179143.2	3.38	6.75	
37-2222	OZ	69.1	87.48	0.625	30	36.7	39.9	43.2	1036.4	10.03	20.06	A3
		3714.6	2222	15.875	762	179	194.9	210.8	141526.6	3.06	6.11	
37-3064	OZ	69.2	120.61	0.75	34	36.3	39.6	42.8	1177.1	13.24	26.68	A1
		3722.5	3063.6	19.05	863	177.3	193.2	209.1	160736.7	4.04	8.13	
37-3498	OZ	69.4	137.72	0.562	42	31	34	37.1	1456.7	14.29	28.78	B1
		3729.3	3498.2	14.288	1066	151.1	166.1	181.2	198920.6	4.36	8.77	
37-3752	OZ	69.5	147.72	0.394	52	26.3	29.1	32	1807.3	15.6	31.4	B1
		3737.2	3752.2	10	1320	128.2	142.2	156.2	246803.2	4.75	9.57	
37-2771	OZ	69.5	109.1	0.938	28	40.7	44.3	47.9	973.7	12.49	25.18	A2
		3739.2	2771.2	23.812	711	198.6	216.3	233.9	132965.8	3.81	7.67	
37-3307	OZ	69.6	130.21	0.562	40	31.7	34.9	38.2	1391.5	14.06	28.32	B2
		3740.5	3307.4	14.288	1016	154.5	170.5	186.4	190017.4	4.29	8.63	
37-3025	OZ	69.7	119.1	0.562	38	32.6	35.9	39.2	1323.9	13.8	27.8	A2
		3746.2	3025.2	14.288	965	159.3	175.4	191.6	180793.2	4.21	8.47	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
38-2809	OZ	69.8	110.59	0.394	43	28.5	31.3	34.2	1535.6	11.86	23.72	B3
		3752.7	2809	10	1117	139	152.9	166.8	209698.9	3.62	7.23	
38-3470	OZ	69.8	136.61	0.394	50	27	29.9	32.7	1745.6	15.34	30.87	A1
		3753.9	3470	10	1270	131.7	145.8	159.8	238373.8	4.67	9.41	
38-2873	OZ	69.9	113.1	0.75	31	37.1	40.5	44	1118.3	13.01	26.23	A2
		3757.8	2872.8	19.05	812	180.9	197.9	215	152716.4	3.97	7.99	
38-3561	OZ	69.9	140.21	0.394	50	27	30	33	1747.7	15.37	30.94	B2
		3758.5	3561.4	10	1270	131.7	146.5	161.3	238666.7	4.68	9.43	
38-3165	OZ	70	124.61	0.625	38	33.5	36.7	39.8	1330.5	13.77	27.73	A1
		3764.7	3165.2	15.875	965	163.7	179.1	194.5	181684.9	4.2	8.45	
38-3114	OZ	70.1	122.61	0.688	36	35	38.2	41.4	1261.6	13.51	27.21	A1
		3768.3	3114.4	17.462	914	171	186.7	202.3	172288.7	4.12	8.29	
38-2403	OZ	70.2	94.59	0.812	28	39.9	43.3	46.6	983	9.77	19.54	B3
		3775.1	2402.6	20.638	711	195.1	211.3	227.6	134243.4	2.98	5.95	
38-3155	OZ	70.3	124.21	0.75	34	36	39.5	42.9	1195.9	13.28	26.75	B2
		3782.2	3155	19.05	863	175.9	192.6	209.3	163316.5	4.05	8.15	
38-3346	OZ	70.4	131.72	0.75	36	35.4	38.6	41.8	1266.7	13.51	27.21	B1
		3783.4	3345.8	19.05	914	172.9	188.6	204.3	172979.2	4.12	8.29	
38-3803	OZ	70.4	149.72	0.375	53	25.7	28.6	31.4	1900.2	15.86	31.92	B1
		3783.7	3803	9.525	1371	125.6	139.4	153.3	259483.8	4.83	9.73	
38-3053	OZ	70.5	120.21	0.938	30	39.7	43.2	46.8	1057.5	12.75	25.7	B2
		3790.3	3053.4	23.812	762	193.8	211.1	228.3	144408.8	3.89	7.83	
38-2657	OZ	70.6	104.59	0.5	38	32	35	38.1	1340.9	11.08	22.15	B3
		3794.4	2656.6	12.7	965	156.4	171.1	185.8	183116.5	3.38	6.75	
38-3279	OZ	70.6	129.1	0.394	48	27.8	30.8	33.9	1694.4	15.11	30.41	A2
		3795.7	3279.2	10	1219	135.7	150.6	165.5	231383.2	4.61	9.27	
38-3447	OZ	70.7	135.72	0.625	40	32.6	35.8	38.9	1413.3	14.03	28.25	B1
		3799.3	3447.4	15.875	1016	159.3	174.6	189.9	193004.3	4.28	8.61	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
38-2974	OZ	70.7	117.1	0.625	36	34.3	37.7	41.1	1272.3	13.54	27.27	A2
		3800.1	2974.4	15.875	914	167.6	184.1	200.5	173738.8	4.13	8.31	
38-3244	OZ	70.7	127.72	0.938	31	39.2	42.5	45.9	1131.4	12.98	26.16	B1
		3801.9	3244.2	23.812	812	191.5	207.7	223.9	154509	3.96	7.97	
38-2924	OZ	70.7	115.1	0.688	34	35.8	39.2	42.7	1202.3	13.28	26.75	A2
		3802.2	2923.6	17.462	863	174.8	191.6	208.3	164178.3	4.05	8.15	
38-3257	OZ	70.8	128.21	0.625	38	33.3	36.6	40	1344.4	13.8	27.8	B2
		3804.3	3256.6	15.875	965	162.7	178.9	195.1	183596.3	4.21	8.47	
38-3612	OZ	70.8	142.21	0.375	52	26.4	29.4	32.4	1840.3	15.63	31.46	B2
		3805.4	3612.2	9.525	1320	129.1	143.7	158.3	251310.5	4.76	9.59	
38-3521	OZ	70.8	138.61	0.375	52	26.4	29.3	32.1	1840.6	15.6	31.4	A1
		3806	3520.8	9.525	1320	129.1	142.9	156.8	251350	4.75	9.57	
38-3397	OZ	71	133.72	0.688	38	34.1	37.3	40.5	1348.6	13.77	27.73	B1
		3816	3396.6	17.462	965	166.6	182.1	197.6	184159.1	4.2	8.45	
38-3206	OZ	71	126.21	0.688	36	34.8	38.2	41.5	1277.8	13.54	27.27	B2
		3816.7	3205.8	17.462	914	169.8	186.3	202.7	174498.3	4.13	8.31	
38-3330	OZ	71.6	131.1	0.375	50	27.2	30.2	33.3	1789	15.37	30.94	A2
		3847.2	3330	9.525	1270	133	147.7	162.4	244298.7	4.68	9.43	
39-2527	OZ	71.6	99.48	0.394	42	29.7	32.6	35.4	1503.9	11.6	23.2	A3
		3850.3	2526.8	10	1066	145	158.9	172.9	205373.7	3.54	7.07	
39-3318	OZ	71.7	130.61	0.5	43	30.4	33.4	36.4	1576.8	14.55	29.3	A1
		3853.4	3317.6	12.7	1117	148.4	163.1	177.8	215326.7	4.44	8.93	
39-2070	OZ	71.9	81.48	0.938	24	44.5	48	51.5	862.2	9.24	18.49	A3
		3863.1	2069.6	23.812	609	217.3	234.3	251.4	117746.5	2.82	5.64	
39-3013	OZ	71.9	118.61	0.875	31	39.4	42.7	46	1150	12.98	26.16	A1
		3864.4	3012.8	22.225	812	192.4	208.6	224.8	157048.2	3.96	7.97	
39-2758	OZ	71.9	108.59	0.438	42	30.2	33.1	36	1510.4	11.6	23.2	B3
		3866.8	2758.2	11.112	1066	147.4	161.5	175.7	206254.9	3.54	7.07	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
39-3409	OZ	72	134.21	0.5	43	30.3	33.5	36.6	1583.6	14.59	29.37	B2
		3869.9	3409	12.7	1117	147.9	163.4	178.9	216250.7	4.45	8.95	
39-2707	OZ	72	106.59	0.472	40	31.3	34.3	37.3	1440	11.34	22.68	B3
		3870.9	2707.4	12	1016	153	167.4	181.9	196644.1	3.46	6.91	
39-2453	OZ	72.1	96.59	0.75	30	38.9	42.2	45.4	1081.7	10.03	20.06	B3
		3876.9	2453.4	19.05	762	190	205.9	221.9	147711.4	3.06	6.11	
39-2374	OZ	72.2	93.48	0.5	36	33.5	36.5	39.6	1298.8	10.81	21.63	A3
		3879.2	2374.4	12.7	914	163.5	178.3	193.2	177357.7	3.3	6.59	
39-3701	OZ	72.2	145.72	0.438	50	27.8	30.7	33.6	1804.8	15.34	30.87	B1
		3881.3	3701.4	11.112	1270	135.8	150	164.3	246462.7	4.67	9.41	
39-2822	OZ	72.3	111.1	0.875	30	40.1	43.6	47.2	1084.8	12.75	25.7	A2
		3888.3	2822	22.225	762	195.7	213	230.4	148142.3	3.89	7.83	
39-3127	OZ	72.3	123.1	0.5	42	31.2	34.4	37.6	1519	14.32	28.84	A2
		3888.9	3126.8	12.7	1066	152.5	168.2	183.8	207434.7	4.37	8.79	
39-3419	OZ	72.4	134.61	0.438	48	28.6	31.5	34.4	1737	15.08	30.35	A1
		3891.2	3419.2	11.112	1219	139.6	153.9	168.2	237205.5	4.6	9.25	
39-3511	OZ	72.5	138.21	0.438	48	28.5	31.6	34.7	1739.4	15.11	30.41	B2
		3896.5	3510.6	11.112	1219	139.4	154.4	169.4	237533.1	4.61	9.27	
39-2606	OZ	72.5	102.59	0.562	36	34.1	37.2	40.3	1305.9	10.81	21.63	B3
		3900.4	2605.8	14.288	914	166.7	181.7	196.7	178327.3	3.3	6.59	
39-2962	OZ	72.6	116.61	1	30	42	45.4	48.8	1089.5	12.72	25.64	A1
		3905	2962	25.4	762	205.2	221.7	238.1	148778.8	3.88	7.81	
39-3651	OZ	72.8	143.72	0.472	48	28.9	31.8	34.8	1746.5	15.08	30.35	B1
		3912.5	3650.6	12	1219	141.1	155.5	169.9	238506	4.6	9.25	
39-2578	OZ	72.9	101.48	0.375	43	29.1	31.9	34.7	1603.3	11.86	23.72	A3
		3918.1	2577.6	9.525	1117	142	155.7	169.3	218942.5	3.62	7.23	
39-2771	OZ	73	109.1	1	28	42.6	46.2	49.8	1021.5	12.49	25.18	A2
		3922.7	2771.2	25.4	711	208	225.6	243.3	139491.8	3.81	7.67	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
39-3104	OZ	73.1	122.21	0.875	31	39	42.5	46	1170	13.01	26.23	B2
		3931.6	3104.2	22.225	812	190.6	207.5	224.5	159778.9	3.97	7.99	
39-2171	OZ	73.2	85.48	0.75	28	40.6	44	47.3	1024.1	9.77	19.54	A3
		3933	2171.2	19.05	711	198.5	214.7	230.9	139856.4	2.98	5.95	
39-2504	OZ	73.2	98.59	0.688	31	37.6	40.8	44	1171.4	10.29	20.58	B3
		3936.1	2504.2	17.462	812	183.6	199.2	214.8	159962.1	3.14	6.27	
39-2555	OZ	73.4	100.59	0.625	34	36	39.1	42.3	1247.7	10.55	21.11	B3
		3945.9	2555	15.875	863	175.8	191	206.3	170382.9	3.22	6.43	
39-3295	OZ	73.4	129.72	0.875	34	38.5	41.7	45	1248.5	13.24	26.68	B1
		3948.4	3295	22.225	863	187.8	203.8	219.8	170490.4	4.04	8.13	
39-3178	OZ	73.5	125.1	0.472	43	30.5	33.7	36.9	1616.2	14.59	29.37	A2
		3949.6	3177.6	12	1117	149.2	164.6	179.9	220705.8	4.45	8.95	
40-3803	OZ	73.7	149.72	0.394	53	26.6	29.4	32.2	1988.9	15.86	31.92	B1
		3960.4	3803	10	1371	129.8	143.6	157.4	271607.4	4.83	9.73	
40-2425	OZ	73.7	95.48	0.472	38	32.8	35.7	38.7	1399.8	11.08	22.15	A3
		3961	2425.2	12	965	159.9	174.4	189	191159.2	3.38	6.75	
40-2476	OZ	73.7	97.48	0.438	40	31.5	34.4	37.4	1473.7	11.34	22.68	A3
		3961.5	2476	11.112	1016	153.9	168.2	182.4	201244	3.46	6.91	
40-3612	OZ	74	142.21	0.394	52	27.3	30.3	33.3	1923.6	15.63	31.46	B2
		3977.7	3612.2	10	1320	133.3	147.9	162.5	262689.1	4.76	9.59	
40-2324	OZ	74	91.48	0.562	34	35.7	38.8	41.9	1258.2	10.55	21.11	A3
		3979.1	2323.6	14.288	863	174.3	189.5	204.6	171818.4	3.22	6.43	
40-3521	OZ	74.1	138.61	0.394	52	27.3	30.2	33	1926.1	15.6	31.4	A1
		3982.8	3520.8	10	1320	133.4	147.2	161.1	263024	4.75	9.57	
40-3053	OZ	74.1	120.21	1	30	41.6	45.1	48.6	1111.6	12.75	25.7	B2
		3984.3	3053.4	25.4	762	202.9	220.2	237.5	151802.5	3.89	7.83	
40-3064	OZ	74.1	120.61	0.812	34	38.5	41.7	45	1260.4	13.24	26.68	A1
		3986.1	3063.6	20.638	863	187.8	203.7	219.7	172117.8	4.04	8.13	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
40-2403	OZ	74.3	94.59	0.875	28	42.2	45.5	48.8	1039.8	9.77	19.54	B3
		3993	2402.6	22.225	711	205.9	222.2	238.5	141989.6	2.98	5.95	
40-3267	OZ	74.3	128.61	0.562	42	32.4	35.5	38.5	1559.8	14.29	28.78	A1
		3993.5	3266.8	14.288	1066	158.3	173.3	188.2	213010.9	4.36	8.77	
40-2222	OZ	74.4	87.48	0.688	30	39.3	42.6	45.8	1115.9	10.03	20.06	A3
		3999.5	2222	17.462	762	191.9	207.7	223.6	152381.3	3.06	6.11	
40-3854	OZ	74.4	151.72	0.375	56	26	28.8	31.6	2083.7	16.12	32.44	B1
		4000.9	3853.8	9.525	1422	127.1	140.7	154.4	284543	4.91	9.89	
40-2873	OZ	74.5	113.1	0.812	31	39.2	42.7	46.2	1191.8	13.01	26.23	A2
		4004.5	2872.8	20.638	812	191.4	208.5	225.5	162744.3	3.97	7.99	
40-3549	OZ	74.6	139.72	0.562	43	31.5	34.6	37.6	1640.9	14.55	29.3	B1
		4009.9	3549	14.288	1117	154	168.8	183.6	224073.8	4.44	8.93	
40-3358	OZ	74.6	132.21	0.562	42	32.3	35.5	38.7	1567.2	14.32	28.84	B2
		4012.2	3358.2	14.288	1066	157.5	173.2	188.9	214011.9	4.37	8.79	
40-3244	OZ	74.6	127.72	1	31	41.1	44.4	47.7	1194.1	12.98	26.16	B1
		4012.4	3244.2	25.4	812	200.7	216.9	233.1	163064.5	3.96	7.97	
40-2273	OZ	74.7	89.48	0.625	31	37.6	40.8	44	1195.5	10.29	20.58	A3
		4017.2	2272.8	15.875	812	183.8	199.3	214.8	163258.6	3.14	6.27	
40-3663	OZ	74.8	144.21	0.375	53	26.7	29.7	32.6	2018.4	15.89	31.98	B2
		4019.2	3663	9.525	1371	130.5	144.9	159.3	275634.1	4.84	9.75	
40-3330	OZ	74.8	131.1	0.394	50	28.1	31.1	34.2	1869.2	15.37	30.94	A2
		4019.7	3330	10	1270	137.4	152.1	166.8	255251.6	4.68	9.43	
40-3076	OZ	74.8	121.1	0.562	40	33.3	36.5	39.8	1496.1	14.06	28.32	A2
		4021.9	3076	14.288	1016	162.5	178.4	194.3	204312	4.29	8.63	
40-3572	OZ	74.9	140.61	0.375	53	26.7	29.5	32.3	2023.3	15.86	31.92	A1
		4028.8	3571.6	9.525	1371	130.6	144.2	157.9	276295.5	4.83	9.73	
40-2070	OZ	75.1	81.48	1	24	46.7	50.2	53.7	901.1	9.24	18.49	A3
		4037	2069.6	25.4	609	227.9	244.9	262	123047.5	2.82	5.64	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
40-3155	OZ	75.1	124.21	0.812	34	38.1	41.5	45	1276.9	13.28	26.75	B2
		4038.2	3155	20.638	863	186.1	202.8	219.6	174367.9	4.05	8.15	
40-2911	OZ	75.2	114.59	0.375	48	28.2	31	33.7	1805.3	12.39	24.77	B3
		4044.2	2910.6	9.525	1219	137.9	151.3	164.7	246533.8	3.78	7.55	
41-3346	OZ	75.4	131.72	0.812	36	37.5	40.7	43.9	1358	13.51	27.21	B1
		4056.2	3345.8	20.638	914	183.1	198.8	214.5	185449.5	4.12	8.29	
41-3114	OZ	75.6	122.61	0.75	36	37.3	40.5	43.7	1360.8	13.51	27.21	A1
		4064.6	3114.4	19.05	914	182.1	197.7	213.4	185831.6	4.12	8.29	
41-2707	OZ	75.6	106.59	0.5	40	32.6	35.6	38.5	1512.4	11.34	22.68	B3
		4065.6	2707.4	12.7	1016	159.3	173.8	188.2	206534.4	3.46	6.91	
41-3381	OZ	75.6	133.1	0.375	52	27.6	30.5	33.5	1966.3	15.63	31.46	A2
		4065.9	3380.8	9.525	1320	134.5	149	163.5	268511.5	4.76	9.59	
41-3216	OZ	75.8	126.61	0.625	40	34.3	37.4	40.5	1515	14.03	28.25	A1
		4072.7	3216	15.875	1016	167.3	182.4	197.6	206891.5	4.28	8.61	
41-2924	OZ	75.9	115.1	0.75	34	38.1	41.5	44.9	1290.6	13.28	26.75	A2
		4081.6	2923.6	19.05	863	185.9	202.6	219.4	176242.9	4.05	8.15	
41-2578	OZ	76.1	101.48	0.394	43	30.1	32.9	35.7	1673.4	11.86	23.72	A3
		4089.6	2577.6	10	1117	147	160.7	174.3	228524.3	3.62	7.23	
41-3013	OZ	76.1	118.61	0.938	31	41.4	44.8	48.1	1218.3	12.98	26.16	A1
		4093.9	3012.8	23.812	812	202.4	218.6	234.7	166376.1	3.96	7.97	
41-3165	OZ	76.2	124.61	0.688	38	35.9	39	42.2	1447.2	13.77	27.73	A1
		4095	3165.2	17.462	965	175.2	190.6	206	197622.6	4.2	8.45	
41-3025	OZ	76.2	119.1	0.625	38	35.1	38.4	41.7	1447.3	13.8	27.8	A2
		4095.3	3025.2	15.875	965	171.4	187.5	203.7	197639.7	4.21	8.47	
41-3307	OZ	76.2	130.21	0.625	40	34	37.3	40.6	1523.7	14.06	28.32	B2
		4096	3307.4	15.875	1016	166.2	182.2	198.1	208077	4.29	8.63	
41-2822	OZ	76.3	111.1	0.938	30	42.1	45.7	49.2	1144.2	12.75	25.7	A2
		4101.1	2822	23.812	762	205.6	223	240.3	156250.1	3.89	7.83	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
41-3498	OZ	76.3	137.72	0.625	42	33.3	36.4	39.5	1602	14.29	28.78	B1
		4101.5	3498.2	15.875	1066	162.7	177.8	192.8	218772.8	4.36	8.77	
41-3206	OZ	76.3	126.21	0.75	36	37	40.4	43.7	1374.2	13.54	27.27	B2
		4104.4	3205.8	19.05	914	180.6	197	213.5	187655.1	4.13	8.31	
41-2974	OZ	76.5	117.1	0.688	36	36.7	40.1	43.4	1377.2	13.54	27.27	A2
		4113.6	2974.4	17.462	914	179.2	195.7	212.1	188073.8	4.13	8.31	
41-2809	OZ	76.6	110.59	0.438	43	30.7	33.5	36.3	1685.7	11.86	23.72	B3
		4119.6	2809	11.112	1117	149.7	163.6	177.5	230201.9	3.62	7.23	
41-3397	OZ	76.6	133.72	0.75	38	36.3	39.5	42.7	1456.2	13.77	27.73	B1
		4120.6	3396.6	19.05	965	177.3	192.8	208.3	198860	4.2	8.45	
41-3651	OZ	76.7	143.72	0.5	48	30.1	33	36	1840.5	15.08	30.35	B1
		4123	3650.6	12.7	1219	146.7	161.1	175.5	251339.8	4.6	9.25	
41-3752	OZ	76.7	147.72	0.438	52	28.2	31.1	33.9	1994.5	15.6	31.4	B1
		4124.2	3752.2	11.112	1320	137.7	151.7	165.7	272365	4.75	9.57	
41-3257	OZ	76.7	128.21	0.688	38	35.6	38.9	42.3	1457.9	13.8	27.8	B2
		4125.3	3256.6	17.462	965	173.9	190.1	206.3	199086.7	4.21	8.47	
41-2453	OZ	76.8	96.59	0.812	30	41.3	44.5	47.8	1151.8	10.03	20.06	B3
		4128.3	2453.4	20.638	762	201.6	217.5	233.4	157287.5	3.06	6.11	
41-3561	OZ	76.9	140.21	0.438	50	28.9	32	35	1922.7	15.37	30.94	B2
		4134.8	3561.4	11.112	1270	141.3	156.1	170.9	262561.8	4.68	9.43	
41-2758	OZ	76.9	108.59	0.472	42	31.9	34.8	37.7	1615.6	11.6	23.2	B3
		4136.1	2758.2	12	1066	155.7	169.8	184	220620	3.54	7.07	
41-3447	OZ	76.9	135.72	0.688	40	34.9	38	41.2	1539	14.03	28.25	B1
		4137.1	3447.4	17.462	1016	170.5	185.8	201	210163.3	4.28	8.61	
41-3470	OZ	77	136.61	0.438	50	29	31.9	34.8	1925.2	15.34	30.87	A1
		4140.1	3470	11.112	1270	141.6	155.7	169.7	262898.3	4.67	9.41	
42-3178	OZ	77.2	125.1	0.5	43	31.8	34.9	38.1	1698.9	14.59	29.37	A2
		4151.7	3177.6	12.7	1117	155.1	170.5	185.9	231998.6	4.45	8.95	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
42-3104	OZ	77.3	122.21	0.938	31	41	44.5	48	1236.3	13.01	26.23	B2
		4154.3	3104.2	23.812	812	200.2	217.2	234.2	168832.1	3.97	7.99	
42-2425	OZ	77.3	95.48	0.5	38	34.1	37.1	40.1	1468.9	11.08	22.15	A3
		4156.4	2425.2	12.7	965	166.6	181.1	195.7	200588.5	3.38	6.75	
42-3701	OZ	77.5	145.72	0.472	50	29.3	32.2	35.2	1938.5	15.34	30.87	B1
		4168.8	3701.4	12	1270	143.2	157.4	171.6	264716.3	4.67	9.41	
42-3279	OZ	77.6	129.1	0.438	48	29.8	32.9	36	1862.2	15.11	30.41	A2
		4171.5	3279.2	11.112	1219	145.7	160.6	175.6	254294.9	4.61	9.27	
42-3511	OZ	77.7	138.21	0.472	48	30.1	33.1	36.2	1863.8	15.11	30.41	B2
		4175.2	3510.6	12	1219	146.8	161.8	176.9	254520.8	4.61	9.27	
42-3419	OZ	77.7	134.61	0.472	48	30.2	33.1	36	1864.7	15.08	30.35	A1
		4177.3	3419.2	12	1219	147.3	161.6	175.8	254647.3	4.6	9.25	
42-2171	OZ	77.7	85.48	0.812	28	43.1	46.5	49.8	1087.8	9.77	19.54	A3
		4177.5	2171.2	20.638	711	210.6	226.8	243	148550.7	2.98	5.95	
42-3295	OZ	77.9	129.72	0.938	34	40.5	43.7	47	1324.2	13.24	26.68	B1
		4187.8	3295	23.812	863	197.6	213.5	229.5	180829.4	4.04	8.13	
42-3854	OZ	77.9	151.72	0.394	56	26.9	29.7	32.5	2181.5	16.12	32.44	B1
		4188.8	3853.8	10	1422	131.3	145	158.6	297906.5	4.91	9.89	
42-2657	OZ	78	104.59	0.562	38	34.9	37.9	40.9	1482.9	11.08	22.15	B3
		4195.9	2656.6	14.288	965	170.2	184.9	199.6	202496.5	3.38	6.75	
42-3663	OZ	78.2	144.21	0.394	53	27.6	30.6	33.5	2110.6	15.89	31.98	B2
		4202.7	3663	10	1371	134.9	149.3	163.7	288221.1	4.84	9.75	
42-2403	OZ	78.3	94.59	0.938	28	44.4	47.7	51.1	1095.7	9.77	19.54	B3
		4207.7	2402.6	23.812	711	216.8	233	249.3	149625.9	2.98	5.95	
42-3572	OZ	78.4	140.61	0.394	53	27.6	30.4	33.2	2117.8	15.86	31.92	A1
		4217	3571.6	10	1371	135	148.6	162.3	289204.5	4.83	9.73	
42-2527	OZ	78.5	99.48	0.438	42	32	34.9	37.7	1648.7	11.6	23.2	A3
		4220.9	2526.8	11.112	1066	156.3	170.3	184.2	225143.3	3.54	7.07	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
42-2504	OZ	78.5	98.59	0.75	31	40.1	43.3	46.5	1256.7	10.29	20.58	B3
		4222.6	2504.2	19.05	812	195.7	211.3	226.9	171607.8	3.14	6.27	
42-2911	OZ	78.6	114.59	0.394	48	29.2	32	34.7	1886.4	12.39	24.77	B3
		4225.7	2910.6	10	1219	142.7	156.1	169.5	257599.2	3.78	7.55	
42-2476	OZ	78.7	97.48	0.472	40	33.3	36.2	39.2	1574.6	11.34	22.68	A3
		4232.7	2476	12	1016	162.7	176.9	191.2	215021.9	3.46	6.91	
42-3714	OZ	78.8	146.21	0.375	56	27	29.9	32.8	2207.2	16.16	32.51	B2
		4238.1	3713.8	9.525	1422	132	146.2	160.4	301417.1	4.92	9.91	
42-3064	OZ	79	120.61	0.875	34	40.6	43.9	47.1	1342.8	13.24	26.68	A1
		4246.6	3063.6	22.225	863	198.3	214.2	230.1	183367.9	4.04	8.13	
42-2873	OZ	79	113.1	0.875	31	41.4	44.8	48.3	1264.3	13.01	26.23	A2
		4248.3	2872.8	22.225	812	201.9	219	236	172648.9	3.97	7.99	
42-3381	OZ	79	133.1	0.394	52	28.5	31.4	34.4	2055.3	15.63	31.46	A2
		4250	3380.8	10	1320	139	153.5	168	280669	4.76	9.59	
43-3622	OZ	79.2	142.61	0.375	56	27	29.8	32.6	2216.8	16.12	32.44	A1
		4256.5	3622.4	9.525	1422	132	145.5	159	302719.7	4.91	9.89	
43-2606	OZ	79.3	102.59	0.625	36	36.9	39.9	43	1427	10.81	21.63	B3
		4262.2	2605.8	15.875	914	180	194.9	209.9	194867.3	3.3	6.59	
43-2555	OZ	79.4	100.59	0.688	34	38.6	41.7	44.9	1349.9	10.55	21.11	B3
		4269.3	2555	17.462	863	188.5	203.8	219	184347.6	3.22	6.43	
43-2961	OZ	79.6	116.59	0.375	50	28.6	31.3	34	1989.4	12.65	25.29	B3
		4278.3	2961.4	9.525	1270	139.5	152.7	165.9	271672.6	3.85	7.71	
43-2374	OZ	79.6	93.48	0.562	36	36.5	39.5	42.6	1433.1	10.81	21.63	A3
		4280.5	2374.4	14.288	914	178.1	192.9	207.8	195706.4	3.3	6.59	
43-2222	OZ	79.6	87.48	0.75	30	41.9	45.2	48.4	1194.3	10.03	20.06	A3
		4280.7	2222	19.05	762	204.7	220.5	236.4	163094.1	3.06	6.11	
43-3318	OZ	79.8	130.61	0.562	43	33	36	39.1	1755.3	14.55	29.3	A1
		4289.6	3317.6	14.288	1117	161.3	176	190.7	239702.8	4.44	8.93	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
43-3432	OZ	79.8	135.1	0.375	53	27.9	30.8	33.7	2154.5	15.89	31.98	A2
		4290.2	3431.6	9.525	1371	136	150.3	164.5	294220.7	4.84	9.75	
43-3155	OZ	79.8	124.21	0.875	34	40.2	43.6	47.1	1356.9	13.28	26.75	B2
		4291.2	3155	22.225	863	196.3	213	229.7	185292.1	4.05	8.15	
43-3409	OZ	79.9	134.21	0.562	43	32.9	36	39.2	1757.3	14.59	29.37	B2
		4294.4	3409	14.288	1117	160.4	175.9	191.4	239973.2	4.45	8.95	
43-3127	OZ	80.2	123.1	0.562	42	33.9	37.1	40.3	1683.2	14.32	28.84	A2
		4309.1	3126.8	14.288	1066	165.5	181.2	196.8	229849.9	4.37	8.79	
43-2822	OZ	80.2	111.1	1	30	44.1	47.7	51.2	1202.8	12.75	25.7	A2
		4311	2822	25.4	762	215.5	232.8	250.2	164250.1	3.89	7.83	
43-3013	OZ	80.4	118.61	1	31	43.5	46.8	50.1	1285.8	12.98	26.16	A1
		4320.6	3012.8	25.4	812	212.3	228.5	244.7	175588.8	3.96	7.97	
43-3346	OZ	80.5	131.72	0.875	36	39.6	42.8	46	1448.3	13.51	27.21	B1
		4326	3345.8	22.225	914	193.3	209	224.7	197784.4	4.12	8.29	
43-2273	OZ	80.7	89.48	0.688	31	40.4	43.6	46.7	1290.6	10.29	20.58	A3
		4336.8	2272.8	17.462	812	197.2	212.7	228.2	176248.3	3.14	6.27	
43-2324	OZ	80.7	91.48	0.625	34	38.6	41.7	44.8	1371.9	10.55	21.11	A3
		4338.8	2323.6	15.875	863	188.3	203.5	218.7	187350.7	3.22	6.43	
43-2758	OZ	80.9	108.59	0.5	42	33.2	36.1	39	1698.2	11.6	23.2	B3
		4347.6	2758.2	12.7	1066	162.2	176.3	190.5	231898.8	3.54	7.07	
44-3114	OZ	81.1	122.61	0.812	36	39.5	42.7	46	1458.9	13.51	27.21	A1
		4357.6	3114.4	20.638	914	193	208.7	224.4	199228.4	4.12	8.29	
44-2924	OZ	81.1	115.1	0.812	34	40.3	43.8	47.2	1377.9	13.28	26.75	A2
		4357.8	2923.6	20.638	863	196.9	213.7	230.4	188168.9	4.05	8.15	
44-3803	OZ	81.3	149.72	0.438	53	28.6	31.4	34.2	2196.1	15.86	31.92	B1
		4373	3803	11.112	1371	139.5	153.4	167.2	299903.2	4.83	9.73	
44-3104	OZ	81.4	122.21	1	31	43	46.5	49.9	1301.8	13.01	26.23	B2
		4374.3	3104.2	25.4	812	209.9	226.8	243.8	177773.6	3.97	7.99	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
44-2453	OZ	81.4	96.59	0.875	30	43.6	46.9	50.2	1221	10.03	20.06	B3
		4376.3	2453.4	22.225	762	213	228.9	244.9	166737.7	3.06	6.11	
44-3612	OZ	81.5	142.21	0.438	52	29.3	32.3	35.3	2118.1	15.63	31.46	B2
		4379.8	3612.2	11.112	1320	143.2	157.8	172.4	289241.7	4.76	9.59	
44-3206	OZ	81.6	126.21	0.812	36	39.2	42.5	45.9	1469.5	13.54	27.27	B2
		4389.1	3205.8	20.638	914	191.2	207.7	224.1	200669.9	4.13	8.31	
44-3267	OZ	81.7	128.61	0.625	42	35	38	41.1	1715.5	14.29	28.78	A1
		4392	3266.8	15.875	1066	170.7	185.7	200.6	234269.3	4.36	8.77	
44-2679	OZ	81.7	105.48	0.375	48	29.8	32.5	35.2	1961.3	12.39	24.77	A3
		4393.5	2679.2	9.525	1219	145.5	158.7	171.8	267826.7	3.78	7.55	
44-3511	OZ	81.7	138.21	0.5	48	31.3	34.4	37.4	1961.5	15.11	30.41	B2
		4394.1	3510.6	12.7	1219	152.7	167.7	182.7	267866.4	4.61	9.27	
44-3701	OZ	81.7	145.72	0.5	50	30.5	33.4	36.3	2043.5	15.34	30.87	B1
		4394.6	3701.4	12.7	1270	149	163.2	177.4	279058.5	4.67	9.41	
44-3521	OZ	81.8	138.61	0.438	52	29.4	32.2	35.1	2125.6	15.6	31.4	A1
		4395.3	3520.8	11.112	1320	143.5	157.4	171.2	290265.8	4.75	9.57	
44-3358	OZ	81.8	132.21	0.625	42	34.7	38	41.2	1718.6	14.32	28.84	B2
		4399.9	3358.2	15.875	1066	169.6	185.3	201	234691.7	4.37	8.79	
44-3419	OZ	81.9	134.61	0.5	48	31.4	34.3	37.2	1965.1	15.08	30.35	A1
		4402.1	3419.2	12.7	1219	153.3	167.6	181.9	268349.6	4.6	9.25	
44-3076	OZ	81.9	121.1	0.625	40	35.8	39.1	42.4	1638.3	14.06	28.32	A2
		4404.1	3076	15.875	1016	175	190.9	206.8	223730.1	4.29	8.63	
44-2809	OZ	82	110.59	0.472	43	32.4	35.2	38.1	1804.9	11.86	23.72	B3
		4410.7	2809	12	1117	158.2	172.1	186	246468.9	3.62	7.23	
44-3549	OZ	82.1	139.72	0.625	43	34	37	40.1	1806.3	14.55	29.3	B1
		4414.1	3549	15.875	1117	166	180.8	195.6	246661.9	4.44	8.93	
44-2171	OZ	82.2	85.48	0.875	28	45.6	48.9	52.2	1150.6	9.77	19.54	A3
		4418.5	2171.2	22.225	711	222.6	238.9	255.1	157122.4	2.98	5.95	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus in³/ft (cm³/m)	Width in (mm)	Thickness in (mm)	Pipe Diameter in (mm)	Weight at Ratio			Moment of Inertia in⁴/ft (cm⁴/m)	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)		ft²/ft (m²/m)	ft²/ft (m²/m)	
44-2403	OZ	82.2	94.59	1	28	46.6	49.9	53.3	1150.8	9.77	19.54	B3
		4419.4	2402.6	25.4	711	227.6	243.8	260.1	157153.2	2.98	5.95	
44-3165	OZ	82.2	124.61	0.75	38	38.2	41.4	44.5	1562.7	13.77	27.73	A1
		4421.8	3165.2	19.05	965	186.7	202.1	217.5	213398.2	4.2	8.45	
44-3397	OZ	82.3	133.72	0.812	38	38.5	41.7	44.8	1562.8	13.77	27.73	B1
		4422.1	3396.6	20.638	965	188	203.5	219	213410.5	4.2	8.45	
44-3330	OZ	82.3	131.1	0.438	50	30.2	33.3	36.3	2056.3	15.37	30.94	A2
		4422.2	3330	11.112	1270	147.7	162.4	177.1	280807.1	4.68	9.43	
44-2974	OZ	82.3	117.1	0.75	36	39.1	42.4	45.8	1481.1	13.54	27.27	A2
		4423.8	2974.4	19.05	914	190.8	207.2	223.7	202254.1	4.13	8.31	
44-3295	OZ	82.3	129.72	1	34	42.4	45.7	49	1399	13.24	26.68	B1
		4424.5	3295	25.4	863	207.2	223.2	239.2	191048.5	4.04	8.13	
44-3752	OZ	82.4	147.72	0.472	52	29.8	32.6	35.5	2143.1	15.6	31.4	B1
		4431.6	3752.2	12	1320	145.3	159.3	173.3	292663.5	4.75	9.57	
44-3714	OZ	82.5	146.21	0.394	56	27.9	30.8	33.8	2308.8	16.16	32.51	B2
		4433.1	3713.8	10	1422	136.4	150.6	164.8	315284.3	4.92	9.91	
44-3561	OZ	82.5	140.21	0.472	50	30.5	33.5	36.6	2061.6	15.37	30.94	B2
		4433.6	3561.4	12	1270	149	163.8	178.6	281533	4.68	9.43	
44-3216	OZ	82.5	126.61	0.688	40	36.7	39.8	42.9	1649.7	14.03	28.25	A1
		4434.7	3216	17.462	1016	179.2	194.4	209.6	225285.1	4.28	8.61	
44-3025	OZ	82.6	119.1	0.688	38	37.6	40.9	44.2	1569.4	13.8	27.8	A2
		4440.8	3025.2	17.462	965	183.4	199.6	215.8	214315	4.21	8.47	
44-3257	OZ	82.6	128.21	0.75	38	37.9	41.2	44.5	1570.2	13.8	27.8	B2
		4443	3256.6	19.05	965	185.1	201.3	217.5	214419.6	4.21	8.47	
44-2476	OZ	82.7	97.48	0.5	40	34.7	37.7	40.6	1653.8	11.34	22.68	A3
		4445.6	2476	12.7	1016	169.6	183.9	198.1	225836.5	3.46	6.91	
44-3470	OZ	82.7	136.61	0.472	50	30.6	33.5	36.4	2067.7	15.34	30.87	A1
		4446.8	3470	12	1270	149.5	163.5	177.6	282369.2	4.67	9.41	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
44-3307	OZ	82.7	130.21	0.688	40	36.4	39.7	43	1654.7	14.06	28.32	B2
		4448.1	3307.4	17.462	1016	177.9	193.8	209.7	225962.3	4.29	8.63	
45-3622	OZ	82.9	142.61	0.394	56	28	30.7	33.5	2320.9	16.12	32.44	A1
		4456.4	3622.4	10	1422	136.6	150	163.5	316936.8	4.91	9.89	
45-3279	OZ	83.1	129.1	0.472	48	31.5	34.5	37.6	1995.3	15.11	30.41	A2
		4469.8	3279.2	12	1219	153.7	168.6	183.5	272481.3	4.61	9.27	
45-3498	OZ	83.1	137.72	0.688	42	35.7	38.8	41.9	1746.1	14.29	28.78	B1
		4470.3	3498.2	17.462	1066	174.3	189.3	204.4	238443.2	4.36	8.77	
45-3447	OZ	83.2	135.72	0.75	40	37.2	40.3	43.4	1663.4	14.03	28.25	B1
		4471.6	3447.4	19.05	1016	181.6	196.9	212.1	227156.7	4.28	8.61	
45-2961	OZ	83.2	116.59	0.394	50	29.6	32.3	35	2079.6	12.65	25.29	B3
		4472.3	2961.4	10	1270	144.5	157.7	170.9	283988.7	3.85	7.71	
45-3432	OZ	83.4	135.1	0.394	53	28.8	31.7	34.6	2252.9	15.89	31.98	A2
		4486.1	3431.6	10	1371	140.6	154.9	169.1	307656.4	4.84	9.75	
45-2873	OZ	83.5	113.1	0.938	31	43.5	47	50.5	1335.9	13.01	26.23	A2
		4489	2872.8	23.812	812	212.4	229.4	246.4	182431.3	3.97	7.99	
45-2578	OZ	83.5	101.48	0.438	43	32.5	35.3	38.1	1837.1	11.86	23.72	A3
		4489.4	2577.6	11.112	1117	158.7	172.3	186	250867.9	3.62	7.23	
45-3064	OZ	83.8	120.61	0.938	34	42.8	46	49.3	1424.2	13.24	26.68	A1
		4504.1	3063.6	23.812	863	208.7	224.7	240.6	194487.8	4.04	8.13	
45-2707	OZ	83.8	106.59	0.562	40	35.6	38.5	41.5	1675.5	11.34	22.68	B3
		4504.1	2707.4	14.288	1016	173.6	188.1	202.5	228810	3.46	6.91	
45-2504	OZ	83.8	98.59	0.812	31	42.6	45.8	48.9	1340.9	10.29	20.58	B3
		4505.7	2504.2	20.638	812	207.8	223.4	239	183111.7	3.14	6.27	
45-2527	OZ	84	99.48	0.472	42	33.9	36.7	39.6	1763.5	11.6	23.2	A3
		4514.9	2526.8	12	1066	165.4	179.3	193.3	240824	3.54	7.07	
45-3012	OZ	84	118.59	0.375	52	28.9	31.6	34.2	2185	12.91	25.82	B3
		4518.3	3012.2	9.525	1320	141.2	154.1	167.1	298386.6	3.93	7.87	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
45-3482	OZ	84.1	137.1	0.375	56	28.2	31	33.9	2353.9	16.16	32.51	A2
		4519.8	3482.4	9.525	1422	137.4	151.5	165.5	321445.8	4.92	9.91	
45-3155	OZ	84.5	124.21	0.938	34	42.3	45.7	49.1	1435.9	13.28	26.75	B2
		4541.2	3155	23.812	863	206.5	223.2	239.9	196089.9	4.05	8.15	
46-2222	OZ	84.8	87.48	0.812	30	44.5	47.8	51	1271.7	10.03	20.06	A3
		4558.2	2222	20.638	762	217.4	233.3	249.1	173667.5	3.06	6.11	
46-2555	OZ	85.4	100.59	0.75	34	41.2	44.3	47.5	1451	10.55	21.11	B3
		4589	2555	19.05	863	201.1	216.4	231.7	198152.7	3.22	6.43	
46-2679	OZ	85.4	105.48	0.394	48	30.9	33.6	36.3	2049.3	12.39	24.77	A3
		4590.7	2679.2	10	1219	150.8	163.9	177.1	279847.8	3.78	7.55	
46-3346	OZ	85.4	131.72	0.938	36	41.7	44.9	48.1	1537.7	13.51	27.21	B1
		4592.8	3345.8	23.812	914	203.5	219.2	234.9	209984.7	4.12	8.29	
46-2657	OZ	85.4	104.59	0.625	38	37.7	40.7	43.7	1623.3	11.08	22.15	B3
		4593.5	2656.6	15.875	965	184	198.7	213.4	221680.4	3.38	6.75	
46-2425	OZ	85.5	95.48	0.562	38	37.2	40.2	43.2	1624.3	11.08	22.15	A3
		4596.3	2425.2	14.288	965	181.8	196.3	210.8	221817.7	3.38	6.75	
46-3651	OZ	85.5	143.72	0.562	48	32.7	35.6	38.6	2052.4	15.08	30.35	B1
		4597.7	3650.6	14.288	1219	159.5	173.9	188.3	280278	4.6	9.25	
46-3178	OZ	85.7	125.1	0.562	43	34.5	37.7	40.8	1885.3	14.59	29.37	A2
		4607.2	3177.6	14.288	1117	168.5	183.9	199.3	257448.6	4.45	8.95	
46-2606	OZ	85.9	102.59	0.688	36	39.6	42.6	45.7	1546.8	10.81	21.63	B3
		4620.1	2605.8	17.462	914	193.2	208.2	223.2	211230	3.3	6.59	
46-2453	OZ	86	96.59	0.938	30	46	49.2	52.5	1289.3	10.03	20.06	B3
		4621.1	2453.4	23.812	762	224.5	240.4	256.3	176063.5	3.06	6.11	
46-3854	OZ	86.1	151.72	0.438	56	28.9	31.7	34.5	2409.9	16.12	32.44	B1
		4627.4	3853.8	11.112	1422	141.3	154.9	168.6	329099.1	4.91	9.89	
46-2924	OZ	86.1	115.1	0.875	34	42.6	46	49.4	1464.3	13.28	26.75	A2
		4630.8	2923.6	22.225	863	207.9	224.7	241.4	199957.8	4.05	8.15	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	
46-3663	OZ	86.1	144.21	0.438	53	29.7	32.6	35.6	2325.7	15.89	31.98	B2
		4631.1	3663	11.112	1371	145	159.4	173.8	317598.3	4.84	9.75	
46-2809	OZ	86.3	110.59	0.5	43	33.8	36.6	39.5	1898.4	11.86	23.72	B3
		4639.3	2809	12.7	1117	164.9	178.8	192.7	259243.6	3.62	7.23	
46-2730	OZ	86.3	107.48	0.375	50	30.1	32.8	35.4	2158	12.65	25.29	A3
		4640.9	2730	9.525	1270	147.2	160.1	173	294700.1	3.85	7.71	
46-3114	OZ	86.4	122.61	0.875	36	41.8	45	48.2	1556	13.51	27.21	A1
		4647.4	3114.4	22.225	914	204	219.7	235.3	212479.8	4.12	8.29	
46-2911	OZ	86.5	114.59	0.438	48	31.5	34.3	37	2075.4	12.39	24.77	B3
		4649.2	2910.6	11.112	1219	154	167.4	180.8	283412.4	3.78	7.55	
47-2273	OZ	86.5	89.48	0.75	31	43.1	46.3	49.5	1384.6	10.29	20.58	A3
		4652.6	2272.8	19.05	812	210.6	226.1	241.6	189079.6	3.14	6.27	
47-2171	OZ	86.6	85.48	0.938	28	48.1	51.4	54.7	1212.5	9.77	19.54	A3
		4656.1	2171.2	23.812	711	234.6	250.9	267.1	165572.6	2.98	5.95	
47-3572	OZ	86.6	140.61	0.438	53	29.8	32.6	35.4	2338.4	15.86	31.92	A1
		4656.4	3571.6	11.112	1371	145.4	159	172.7	319333.6	4.83	9.73	
47-3561	OZ	86.8	140.21	0.5	50	31.7	34.8	37.8	2170.8	15.37	30.94	B2
		4668.3	3561.4	12.7	1270	155	169.8	184.6	296439	4.68	9.43	
47-3206	OZ	86.9	126.21	0.875	36	41.3	44.7	48.1	1563.7	13.54	27.27	B2
		4670.7	3205.8	22.225	914	201.9	218.3	234.8	213543.5	4.13	8.31	
47-3752	OZ	86.9	147.72	0.5	52	31	33.8	36.7	2259.9	15.6	31.4	B1
		4673.1	3752.2	12.7	1320	151.2	165.3	179.3	308614.1	4.75	9.57	
47-2374	OZ	87	93.48	0.625	36	39.5	42.5	45.5	1566.1	10.81	21.63	A3
		4677.6	2374.4	15.875	914	192.7	207.5	222.4	213858.3	3.3	6.59	
47-3381	OZ	87	133.1	0.438	52	30.6	33.6	36.6	2263	15.63	31.46	A2
		4679.6	3380.8	11.112	1320	149.6	164	178.5	309038.9	4.76	9.59	
47-3470	OZ	87.2	136.61	0.5	50	31.9	34.8	37.6	2179.8	15.34	30.87	A1
		4687.7	3470	12.7	1270	155.7	169.7	183.8	297667.7	4.67	9.41	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
47-2324	OZ	87.3	91.48	0.688	34	41.4	44.5	47.7	1484.4	10.55	21.11	A3
		4694.4	2323.6	17.462	863	202.3	217.5	232.7	202706.2	3.22	6.43	
47-3612	OZ	87.4	142.21	0.472	52	30.9	33.9	36.9	2272.5	15.63	31.46	B2
		4699.1	3612.2	12	1320	151	165.6	180.2	310326.9	4.76	9.59	
47-3803	OZ	87.4	149.72	0.472	53	30.2	33	35.8	2360.7	15.86	31.92	B1
		4700.7	3803	12	1371	147.3	161.1	174.9	322375	4.83	9.73	
47-3279	OZ	87.5	129.1	0.5	48	32.8	35.8	38.9	2100	15.11	30.41	A2
		4704.2	3279.2	12.7	1219	160	174.9	189.8	286768.6	4.61	9.27	
47-3409	OZ	87.7	134.21	0.625	43	35.4	38.6	41.8	1929.5	14.59	29.37	B2
		4715.3	3409	15.875	1117	172.9	188.4	203.9	263488.9	4.45	8.95	
47-3397	OZ	87.8	133.72	0.875	38	40.7	43.9	47	1668.2	13.77	27.73	B1
		4720.5	3396.6	22.225	965	198.6	214.1	229.6	227811.6	4.2	8.45	
47-3318	OZ	87.8	130.61	0.625	43	35.7	38.7	41.7	1932.3	14.55	29.3	A1
		4722	3317.6	15.875	1117	174.1	188.8	203.5	263866.3	4.44	8.93	
47-3521	OZ	87.8	138.61	0.472	52	31	33.9	36.7	2284	15.6	31.4	A1
		4722.9	3520.8	12	1320	151.6	165.4	179.3	311898.4	4.75	9.57	
47-3012	OZ	87.9	118.59	0.394	52	29.9	32.6	35.3	2285	12.91	25.82	B3
		4724.9	3012.2	10	1320	146.2	159.2	172.1	312031.8	3.93	7.87	
47-3127	OZ	87.9	123.1	0.625	42	36.6	39.8	43	1845.8	14.32	28.84	A2
		4725.5	3126.8	15.875	1066	178.5	194.2	209.8	252060.2	4.37	8.79	
47-2873	OZ	87.9	113.1	1	31	45.6	49.1	52.6	1406.7	13.01	26.23	A2
		4726.7	2872.8	25.4	812	222.8	239.8	256.8	192093	3.97	7.99	
47-3482	OZ	87.9	137.1	0.394	56	29.1	32	34.9	2462.2	16.16	32.51	A2
		4727.7	3482.4	10	1422	142.2	156.2	170.3	336234.4	4.92	9.91	
47-2974	OZ	88	117.1	0.812	36	41.4	44.8	48.2	1583.8	13.54	27.27	A2
		4730.6	2974.4	20.638	914	202.3	218.7	235.2	216281.5	4.13	8.31	
47-3330	OZ	88.2	131.1	0.472	50	31.9	34.9	37.9	2204.9	15.37	30.94	A2
		4741.7	3330	12	1270	155.9	170.6	185.3	301096.6	4.68	9.43	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
47-3165	OZ	88.3	124.61	0.812	38	40.6	43.7	46.9	1677	13.77	27.73	A1
		4745.4	3165.2	20.638	965	198.1	213.5	228.9	229012.4	4.2	8.45	
47-2527	OZ	88.3	99.48	0.5	42	35.3	38.2	41	1853.7	11.6	23.2	A3
		4745.7	2526.8	12.7	1066	172.5	186.5	200.4	253135.7	3.54	7.07	
48-3257	OZ	88.5	128.21	0.812	38	40.2	43.5	46.8	1681.3	13.8	27.8	B2
		4757.5	3256.6	20.638	965	196.2	212.4	228.6	229595.5	4.21	8.47	
48-3064	OZ	88.5	120.61	1	34	44.9	48.1	51.4	1504.7	13.24	26.68	A1
		4758.7	3063.6	25.4	863	219.2	235.1	251	205478.8	4.04	8.13	
48-3063	OZ	88.6	120.59	0.375	53	29.2	31.8	34.5	2392.3	13.17	26.34	B3
		4763.7	3063	9.525	1371	142.7	155.5	168.2	326694.2	4.01	8.03	
48-3076	OZ	89	121.1	0.688	40	38.4	41.7	44.9	1779.2	14.06	28.32	A2
		4782.7	3076	17.462	1016	187.5	203.4	219.3	242960.9	4.29	8.63	
48-3025	OZ	89	119.1	0.75	38	40	43.3	46.7	1690.3	13.8	27.8	A2
		4782.9	3025.2	19.05	965	195.4	211.6	227.8	230820.7	4.21	8.47	
48-3358	OZ	89	132.21	0.688	42	37.2	40.4	43.6	1868.7	14.32	28.84	B2
		4784.1	3358.2	17.462	1066	181.7	197.4	213.1	255182.2	4.37	8.79	
48-2504	OZ	89	98.59	0.875	31	45	48.2	51.4	1424.1	10.29	20.58	B3
		4785.3	2504.2	22.225	812	219.8	235.4	251	194474.2	3.14	6.27	
48-3267	OZ	89	128.61	0.688	42	37.5	40.6	43.6	1869.8	14.29	28.78	A1
		4786.9	3266.8	17.462	1066	183.1	198.1	213	255333	4.36	8.77	
48-3155	OZ	89.1	124.21	1	34	44.4	47.8	51.2	1514.1	13.28	26.75	B2
		4788.4	3155	25.4	863	216.6	233.3	250	206762.5	4.05	8.15	
48-3216	OZ	89.2	126.61	0.75	40	39.1	42.3	45.4	1783.1	14.03	28.25	A1
		4793.3	3216	19.05	1016	191.1	206.3	221.5	243501.2	4.28	8.61	
48-3307	OZ	89.2	130.21	0.75	40	38.8	42.1	45.3	1784.4	14.06	28.32	B2
		4796.8	3307.4	19.05	1016	189.4	205.4	221.3	243675	4.29	8.63	
48-3447	OZ	89.3	135.72	0.812	40	39.5	42.6	45.7	1786.7	14.03	28.25	B1
		4802.9	3447.4	20.638	1016	192.7	208	223.2	243985.3	4.28	8.61	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
48-2578	OZ	89.4	101.48	0.472	43	34.4	37.2	40	1966.9	11.86	23.72	A3
		4806.6	2577.6	12	1117	168	181.6	195.3	268595.3	3.62	7.23	
48-3549	OZ	89.6	139.72	0.688	43	36.4	39.5	42.5	1970.2	14.55	29.3	B1
		4814.8	3549	17.462	1117	178	192.8	207.6	269053	4.44	8.93	
48-2758	OZ	89.7	108.59	0.562	42	36.2	39.1	42	1884.2	11.6	23.2	B3
		4824	2758.2	14.288	1066	176.9	191.1	205.3	257309.5	3.54	7.07	
48-2222	OZ	89.9	87.48	0.875	30	47.1	50.4	53.6	1348.1	10.03	20.06	A3
		4832.1	2222	22.225	762	230.1	245.9	261.8	184101.8	3.06	6.11	
48-3498	OZ	89.9	137.72	0.75	42	38.1	41.1	44.2	1888.8	14.29	28.78	B1
		4835.6	3498.2	19.05	1066	185.8	200.8	215.9	257932.9	4.36	8.77	
49-2730	OZ	90.2	107.48	0.394	50	31.2	33.9	36.5	2255.9	12.65	25.29	A3
		4851.3	2730	10	1270	152.6	165.5	178.4	308060.1	3.85	7.71	
49-3346	OZ	90.3	131.72	1	36	43.7	47	50.2	1626.1	13.51	27.21	B1
		4856.8	3345.8	25.4	914	213.6	229.3	245	222052.1	4.12	8.29	
49-3346	OZ	90.3	131.72	1	36	43.7	47	50.2	1626.1	13.51	27.21	B1
		4856.8	3345.8	25.4	914	213.6	229.3	245	222052.1	4.12	8.29	
49-2453	OZ	90.4	96.59	1	30	48.3	51.6	54.8	1356.7	10.03	20.06	B3
		4862.6	2453.4	25.4	762	235.8	251.7	267.7	185265.4	3.06	6.11	
49-3511	OZ	90.9	138.21	0.562	48	34	37.1	40.2	2181.9	15.11	30.41	B2
		4887.8	3510.6	14.288	1219	166	181	196	297958.7	4.61	9.27	
49-3714	OZ	90.9	146.21	0.438	56	30.1	33	35.9	2545.8	16.16	32.51	B2
		4888.3	3713.8	11.112	1422	146.7	160.9	175.1	347652.7	4.92	9.91	
49-2171	OZ	91	85.48	1	28	50.5	53.8	57.1	1273.5	9.77	19.54	A3
		4890.4	2171.2	25.4	711	246.6	262.8	279	173902.1	2.98	5.95	
49-2781	OZ	91	109.48	0.375	52	30.5	33.1	35.7	2366.9	12.91	25.82	A3
		4894.3	2780.8	9.525	1320	148.8	161.5	174.1	323216.4	3.93	7.87	
49-2924	OZ	91.2	115.1	0.938	34	44.8	48.3	51.7	1549.6	13.28	26.75	A2
		4900.7	2923.6	23.812	863	218.9	235.6	252.4	211610.2	4.05	8.15	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
		in³/ft (cm³/m)	in (mm)	in (mm)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	
49-3701	OZ	91.2	145.72	0.562	50	33.2	36.1	39	2280.4	15.34	30.87	B1
		4904	3701.4	14.288	1270	162.2	176.4	190.6	311404.3	4.67	9.41	
49-2555	OZ	91.2	100.59	0.812	34	43.8	46.9	50	1551	10.55	21.11	B3
		4905	2555	20.638	863	213.8	229.1	244.3	211799.3	3.22	6.43	
49-3419	OZ	91.3	134.61	0.562	48	34.2	37.1	40	2191.3	15.08	30.35	A1
		4908.9	3419.2	14.288	1219	167	181.2	195.5	299246.3	4.6	9.25	
49-3622	OZ	91.6	142.61	0.438	56	30.1	32.9	35.7	2563.9	16.12	32.44	A1
		4923	3622.4	11.112	1422	147.2	160.6	174.1	350122	4.91	9.89	
49-2961	OZ	91.6	116.59	0.438	50	32	34.7	37.4	2290	12.65	25.29	B3
		4924.8	2961.4	11.112	1270	156.1	169.3	182.4	312725.1	3.85	7.71	
49-2476	OZ	91.6	97.48	0.562	40	37.9	40.9	43.8	1832.1	11.34	22.68	A3
		4925.1	2476	14.288	1016	185.3	199.5	213.7	250193.9	3.46	6.91	
49-3114	OZ	91.8	122.61	0.938	36	44	47.2	50.4	1651.9	13.51	27.21	A1
		4934.1	3114.4	23.812	914	214.9	230.6	246.2	225586.6	4.12	8.29	
49-2707	OZ	91.9	106.59	0.625	40	38.5	41.4	44.4	1837.1	11.34	22.68	B3
		4938.4	2707.4	15.875	1016	187.9	202.3	216.7	250871.8	3.46	6.91	
49-3432	OZ	91.9	135.1	0.438	53	31	33.9	36.9	2482.6	15.89	31.98	A2
		4943.3	3431.6	11.112	1371	151.4	165.7	179.9	339014.7	4.84	9.75	
49-3206	OZ	92.1	126.21	0.938	36	43.5	46.9	50.3	1657	13.54	27.27	B2
		4949.2	3205.8	23.812	914	212.5	228.9	245.4	226276.7	4.13	8.31	
49-3612	OZ	92.1	142.21	0.5	52	32.2	35.2	38.2	2393.8	15.63	31.46	B2
		4950	3612.2	12.7	1320	157.2	171.8	186.4	326895.7	4.76	9.59	
50-3803	OZ	92.2	149.72	0.5	53	31.4	34.3	37.1	2490	15.86	31.92	B1
		4958.3	3803	12.7	1371	153.4	167.2	181.1	340037.3	4.83	9.73	
50-2273	OZ	92.3	89.48	0.812	31	45.9	49	52.2	1477.4	10.29	20.58	A3
		4964.4	2272.8	20.638	812	223.9	239.4	254.9	201754.8	3.14	6.27	
50-3663	OZ	92.5	144.21	0.472	53	31.3	34.3	37.2	2496.6	15.89	31.98	B2
		4971.3	3663	12	1371	153	167.4	181.8	340928.9	4.84	9.75	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
50-2606	OZ	92.5	102.59	0.75	36	42.3	45.3	48.4	1665.3	10.81	21.63	B3
		4974.1	2605.8	19.05	914	206.4	221.4	236.4	227416.2	3.3	6.59	
50-3854	OZ	92.5	151.72	0.472	56	30.6	33.4	36.2	2591.4	16.12	32.44	B1
		4975.8	3853.8	12	1422	149.2	162.9	176.5	353877.2	4.91	9.89	
50-3521	OZ	92.6	138.61	0.5	52	32.3	35.2	38	2408.5	15.6	31.4	A1
		4980.3	3520.8	12.7	1320	157.9	171.8	185.6	328897.4	4.75	9.57	
50-3063	OZ	92.7	120.59	0.394	53	30.3	32.9	35.5	2502.6	13.17	26.34	B3
		4983.2	3063	10	1371	147.9	160.6	173.4	341746.7	4.01	8.03	
50-2911	OZ	92.7	114.59	0.472	48	33.4	36.1	38.9	2225.4	12.39	24.77	B3
		4985.3	2910.6	12	1219	163	176.4	189.8	303902	3.78	7.55	
50-2657	OZ	92.8	104.59	0.688	38	40.5	43.5	46.5	1762.4	11.08	22.15	B3
		4986.9	2656.6	17.462	965	197.7	212.4	227.1	240669.4	3.38	6.75	
50-3330	OZ	92.9	131.1	0.5	50	33.2	36.3	39.3	2321.6	15.37	30.94	A2
		4992.7	3330	12.7	1270	162.3	177	191.7	317038.4	4.68	9.43	
50-3572	OZ	93.1	140.61	0.472	53	31.5	34.3	37.1	2513.7	15.86	31.92	A1
		5005.3	3571.6	12	1371	153.6	167.3	180.9	343261.3	4.83	9.73	
50-3114	OZ	93.3	122.59	0.375	56	29.5	32.1	34.7	2611.4	13.43	26.87	B3
		5014.2	3113.8	9.525	1422	144.2	156.8	169.3	356612.2	4.09	8.19	
50-3397	OZ	93.3	133.72	0.938	38	42.8	46	49.2	1772.6	13.77	27.73	B1
		5015.8	3396.6	23.812	965	209.2	224.7	240.2	242064.7	4.2	8.45	
50-3381	OZ	93.4	133.1	0.472	52	32.4	35.3	38.3	2428	15.63	31.46	A2
		5020.7	3380.8	12	1320	158	172.4	186.9	331567.3	4.76	9.59	
50-2425	OZ	93.6	95.48	0.625	38	40.3	43.3	46.3	1778.2	11.08	22.15	A3
		5031.7	2425.2	15.875	965	196.8	211.4	225.9	242832	3.38	6.75	
50-2974	OZ	93.6	117.1	0.875	36	43.8	47.1	50.5	1685.4	13.54	27.27	A2
		5034	2974.4	22.225	914	213.7	230.2	246.6	230156.6	4.13	8.31	
50-2324	OZ	93.9	91.48	0.75	34	44.3	47.4	50.5	1595.5	10.55	21.11	A3
		5046	2323.6	19.05	863	216.3	231.4	246.6	217886.1	3.22	6.43	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
51-2679	OZ	93.9	105.48	0.438	48	33.4	36.1	38.8	2254.6	12.39	24.77	A3
		5050.7	2679.2	11.112	1219	163	176.2	189.3	307890.5	3.78	7.55	
51-2578	OZ	94	101.48	0.5	43	35.9	38.7	41.5	2068.8	11.86	23.72	A3
		5055.8	2577.6	12.7	1117	175.3	188.9	202.6	282516.8	3.62	7.23	
51-3178	OZ	94.1	125.1	0.625	43	37.3	40.4	43.6	2070	14.59	29.37	A2
		5058.6	3177.6	15.875	1117	181.9	197.3	212.7	282676.8	4.45	8.95	
51-2504	OZ	94.1	98.59	0.938	31	47.5	50.7	53.9	1506.3	10.29	20.58	B3
		5061.4	2504.2	23.812	812	231.8	247.4	263	205696.5	3.14	6.27	
51-3165	OZ	94.2	124.61	0.875	38	42.9	46.1	49.2	1790.2	13.77	27.73	A1
		5065.6	3165.2	22.225	965	209.5	224.9	240.3	244466.4	4.2	8.45	
51-3651	OZ	94.3	143.72	0.625	48	35.3	38.2	41.2	2262.7	15.08	30.35	B1
		5068.7	3650.6	15.875	1219	172.3	186.7	201.1	308985.4	4.6	9.25	
51-3257	OZ	94.3	128.21	0.875	38	42.5	45.8	49.1	1791.3	13.8	27.8	B2
		5068.7	3256.6	22.225	965	207.3	223.5	239.7	244615.8	4.21	8.47	
51-2374	OZ	94.3	93.48	0.688	36	42.4	45.5	48.5	1697.6	10.81	21.63	A3
		5070.3	2374.4	17.462	914	207.2	222.1	236.9	231815.7	3.3	6.59	
51-2222	OZ	94.9	87.48	0.938	30	49.7	53	56.2	1423.6	10.03	20.06	A3
		5102.3	2222	23.812	762	242.7	258.5	274.4	194398.8	3.06	6.11	
51-2781	OZ	95.2	109.48	0.394	52	31.6	34.2	36.8	2475.1	12.91	25.82	A3
		5118.1	2780.8	10	1320	154.3	166.9	179.6	337997.1	3.93	7.87	
51-3025	OZ	95.3	119.1	0.812	38	42.5	45.8	49.1	1809.9	13.8	27.8	A2
		5121.4	3025.2	20.638	965	207.4	223.6	239.8	247157.4	4.21	8.47	
51-3447	OZ	95.4	135.72	0.875	40	41.7	44.9	48	1908.7	14.03	28.25	B1
		5130.9	3447.4	22.225	1016	203.8	219	234.3	260650.3	4.28	8.61	
51-3409	OZ	95.5	134.21	0.688	43	38	41.1	44.3	2100.2	14.59	29.37	B2
		5132.4	3409	17.462	1117	185.4	200.9	216.3	286799.6	4.45	8.95	
51-3127	OZ	95.6	123.1	0.688	42	39.2	42.4	45.6	2007	14.32	28.84	A2
		5138.1	3126.8	17.462	1066	191.5	207.1	222.8	274067	4.37	8.79	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
51-3307	OZ	95.6	130.21	0.812	40	41.2	44.4	47.7	1912.8	14.06	28.32	B2
		5142	3307.4	20.638	1016	201	216.9	232.9	261216	4.29	8.63	
51-3216	OZ	95.8	126.61	0.812	40	41.6	44.7	47.8	1915.2	14.03	28.25	A1
		5148.4	3216	20.638	1016	203	218.2	233.4	261540.7	4.28	8.61	
52-3318	OZ	95.8	130.61	0.688	43	38.3	41.3	44.3	2107.7	14.55	29.3	A1
		5150.7	3317.6	17.462	1117	186.9	201.6	216.3	287819.2	4.44	8.93	
52-2832	OZ	95.8	111.48	0.375	53	30.8	33.3	35.9	2587.8	13.17	26.34	A3
		5153	2831.6	9.525	1371	150.3	162.8	175.2	353391.8	4.01	8.03	
52-2809	OZ	95.9	110.59	0.562	43	36.9	39.7	42.6	2109.2	11.86	23.72	B3
		5154.5	2809	14.288	1117	180.1	194	207.9	288033.2	3.62	7.23	
52-3076	OZ	95.9	121.1	0.75	40	41	44.2	47.5	1918.6	14.06	28.32	A2
		5157.6	3076	19.05	1016	200	215.9	231.8	262006.1	4.29	8.63	
52-3358	OZ	96.1	132.21	0.75	42	39.7	42.9	46.1	2017.3	14.32	28.84	B2
		5164.7	3358.2	19.05	1066	193.7	209.4	225.1	275484.4	4.37	8.79	
52-2924	OZ	96.1	115.1	1	34	47.1	50.5	53.9	1633.9	13.28	26.75	A2
		5167.4	2923.6	25.4	863	229.8	246.5	263.3	223127.6	4.05	8.15	
52-3267	OZ	96.3	128.61	0.75	42	40	43.1	46.2	2022.6	14.29	28.78	A1
		5178.2	3266.8	19.05	1066	195.5	210.4	225.3	276203.3	4.36	8.77	
52-3498	OZ	96.7	137.72	0.812	42	40.4	43.5	46.6	2030.2	14.29	28.78	B1
		5197.7	3498.2	20.638	1066	197.3	212.3	227.4	277242.9	4.36	8.77	
52-3561	OZ	96.7	140.21	0.562	50	34.5	37.6	40.6	2417	15.37	30.94	B2
		5197.7	3561.4	14.288	1270	168.7	183.5	198.3	330056.4	4.68	9.43	
52-3012	OZ	96.9	118.59	0.438	52	32.4	35	37.7	2518.1	12.91	25.82	B3
		5207	3012.2	11.112	1320	158.1	171	184	343873.3	3.93	7.87	
52-3549	OZ	96.9	139.72	0.75	43	38.9	41.9	45	2132.8	14.55	29.3	B1
		5212	3549	19.05	1117	189.9	204.7	219.5	291247.7	4.44	8.93	
52-3482	OZ	97	137.1	0.438	56	31.4	34.3	37.1	2715	16.16	32.51	A2
		5213.1	3482.4	11.112	1422	153.2	167.3	181.3	370753.7	4.92	9.91	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
52-2555	OZ	97	100.59	0.875	34	46.4	49.5	52.6	1649.8	10.55	21.11	B3
		5217.4	2555	22.225	863	226.4	241.6	256.9	225288.9	3.22	6.43	
52-3114	OZ	97	122.61	1	36	46.2	49.5	52.7	1746.9	13.51	27.21	A1
		5217.6	3114.4	25.4	914	225.8	241.5	257.1	238550.5	4.12	8.29	
52-3114	OZ	97	122.61	1	36	46.2	49.5	52.7	1746.9	13.51	27.21	A1
		5217.6	3114.4	25.4	914	225.8	241.5	257.1	238550.6	4.12	8.29	
52-3752	OZ	97.1	147.72	0.562	52	33.7	36.6	39.5	2523.4	15.6	31.4	B1
		5218	3752.2	14.288	1320	164.7	178.8	192.8	344598.4	4.75	9.57	
52-3206	OZ	97.2	126.21	1	36	45.7	49.1	52.4	1749.2	13.54	27.27	B2
		5224.6	3205.8	25.4	914	223.1	239.5	256	238871	4.13	8.31	
52-3206	OZ	97.2	126.21	1	36	45.7	49.1	52.4	1749.2	13.54	27.27	B2
		5224.7	3205.8	25.4	914	223.1	239.5	256	238871	4.13	8.31	
52-3470	OZ	97.3	136.61	0.562	50	34.8	37.6	40.5	2432.4	15.34	30.87	A1
		5231	3470	14.288	1270	169.7	183.7	197.8	332170.6	4.67	9.41	
52-3279	OZ	97.3	129.1	0.562	48	35.7	38.7	41.8	2335.9	15.11	30.41	A2
		5232.7	3279.2	14.288	1219	174.2	189.1	204.1	318984.4	4.61	9.27	
52-3663	OZ	97.4	144.21	0.5	53	32.6	35.6	38.5	2630.9	15.89	31.98	B2
		5238.6	3663	12.7	1371	159.4	173.8	188.2	359266.4	4.84	9.75	
52-3114	OZ	97.6	122.59	0.394	56	30.6	33.2	35.8	2732.5	13.43	26.87	B3
		5246.8	3113.8	10	1422	149.5	162	174.6	373151.5	4.09	8.19	
52-2911	OZ	97.6	114.59	0.5	48	34.8	37.6	40.3	2343.3	12.39	24.77	B3
		5249.3	2910.6	12.7	1219	170.1	183.5	196.9	319998.7	3.78	7.55	
52-3854	OZ	97.6	151.72	0.5	56	31.9	34.6	37.4	2734	16.12	32.44	B1
		5249.6	3853.8	12.7	1422	155.5	169.2	182.8	373354.1	4.91	9.89	
52-3714	OZ	97.6	146.21	0.472	56	31.7	34.7	37.6	2734.1	16.16	32.51	B2
		5249.8	3713.8	12	1422	155	169.2	183.4	373364.9	4.92	9.91	
53-2527	OZ	97.9	99.48	0.562	42	38.6	41.5	44.3	2056.8	11.6	23.2	A3
		5265.7	2526.8	14.288	1066	188.6	202.6	216.5	280873.5	3.54	7.07	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
53-2273	OZ	98.1	89.48	0.875	31	48.6	51.8	54.9	1569.1	10.29	20.58	A3
		5272.5	2272.8	22.225	812	237.2	252.7	268.2	214274.1	3.14	6.27	
53-3572	OZ	98.2	140.61	0.5	53	32.8	35.6	38.4	2651.4	15.86	31.92	A1
		5279.5	3571.6	12.7	1371	160.1	173.8	187.5	362068	4.83	9.73	
53-2961	OZ	98.3	116.59	0.472	50	33.9	36.6	39.3	2457.1	12.65	25.29	B3
		5284.1	2961.4	12	1270	165.3	178.5	191.7	335540	3.85	7.71	
53-3381	OZ	98.4	133.1	0.5	52	33.7	36.7	39.6	2557.7	15.63	31.46	A2
		5288.8	3380.8	12.7	1320	164.6	179.1	193.5	349270.2	4.76	9.59	
53-3622	OZ	98.5	142.61	0.472	56	31.9	34.6	37.4	2756.9	16.12	32.44	A1
		5293.6	3622.4	12	1422	155.6	169.1	182.6	376483	4.91	9.89	
53-2758	OZ	98.5	108.59	0.625	42	39.3	42.2	45.1	2068.6	11.6	23.2	B3
		5296	2758.2	15.875	1066	191.6	205.8	220	282487.9	3.54	7.07	
53-3432	OZ	98.7	135.1	0.472	53	32.8	35.7	38.6	2664.9	15.89	31.98	A2
		5306.5	3431.6	12	1371	160	174.3	188.5	363918.5	4.84	9.75	
53-3397	OZ	98.7	133.72	1	38	45	48.2	51.4	1875.9	13.77	27.73	B1
		5308.1	3396.6	25.4	965	219.8	235.3	250.7	256170.6	4.2	8.45	
53-2606	OZ	99	102.59	0.812	36	45	48	51.1	1782.6	10.81	21.63	B3
		5324.3	2605.8	20.638	914	219.5	234.5	249.5	243427.8	3.3	6.59	
53-2504	OZ	99.2	98.59	1	31	49.9	53.1	56.3	1587.4	10.29	20.58	B3
		5334.2	2504.2	25.4	812	243.7	259.3	274.9	216780.3	3.14	6.27	
53-2974	OZ	99.2	117.1	0.938	36	46.1	49.5	52.9	1785.9	13.54	27.27	A2
		5334.2	2974.4	23.812	914	225.2	241.6	258.1	243880.3	4.13	8.31	
53-2730	OZ	99.4	107.48	0.438	50	33.8	36.5	39.1	2484.1	12.65	25.29	A3
		5342.2	2730	11.112	1270	165.1	178	190.9	339232.3	3.85	7.71	
54-2707	OZ	99.9	106.59	0.688	40	41.4	44.3	47.3	1997.1	11.34	22.68	B3
		5368.5	2707.4	17.462	1016	202.1	216.5	231	272720.8	3.46	6.91	
54-2222	OZ	99.9	87.48	1	30	52.3	55.5	58.8	1498	10.03	20.06	A3
		5369	2222	25.4	762	255.2	271.1	287	204559	3.06	6.11	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
54-2657	OZ	100	104.59	0.75	38	43.3	46.3	49.3	1900	11.08	22.15	B3
		5376.4	2656.6	19.05	965	211.4	226.1	240.8	259465.2	3.38	6.75	
54-3257	OZ	100	128.21	0.938	38	44.7	48	51.4	1900.1	13.8	27.8	B2
		5376.7	3256.6	23.812	965	218.3	234.5	250.7	259481.6	4.21	8.47	
54-3511	OZ	100	138.21	0.625	48	36.7	39.8	42.9	2400.5	15.11	30.41	B2
		5377.5	3510.6	15.875	1219	179.3	194.3	209.3	327810.8	4.61	9.27	
54-3165	OZ	100.1	124.61	0.938	38	45.2	48.4	51.6	1902.2	13.77	27.73	A1
		5382.5	3165.2	23.812	965	220.9	236.3	251.7	259761.5	4.2	8.45	
54-2832	OZ	100.3	111.48	0.394	53	31.9	34.5	37	2707.1	13.17	26.34	A3
		5390.4	2831.6	10	1371	155.9	168.4	180.8	369674.5	4.01	8.03	
54-2324	OZ	100.3	91.48	0.812	34	47.1	50.2	53.4	1705.4	10.55	21.11	A3
		5393.5	2323.6	20.638	863	230.1	245.3	260.5	232891.7	3.22	6.43	
54-2476	OZ	100.4	97.48	0.625	40	41.1	44.1	47	2008.8	11.34	22.68	A3
		5400	2476	15.875	1016	200.8	215.1	229.3	274317.5	3.46	6.91	
54-3701	OZ	100.6	145.72	0.625	50	35.9	38.8	41.7	2515.4	15.34	30.87	B1
		5409.5	3701.4	15.875	1270	175.3	189.5	203.7	343505.7	4.67	9.41	
54-3419	OZ	100.7	134.61	0.625	48	37	39.9	42.8	2415.8	15.08	30.35	A1
		5411.7	3419.2	15.875	1219	180.6	194.8	209.1	329896.5	4.6	9.25	
54-2679	OZ	100.7	105.48	0.472	48	35.4	38.1	40.8	2417.6	12.39	24.77	A3
		5415.8	2679.2	12	1219	172.8	186	199.1	330149.7	3.78	7.55	
54-2882	OZ	100.8	113.48	0.375	56	31.1	33.6	36.1	2821.1	13.43	26.87	A3
		5416.8	2882.4	9.525	1422	151.8	164.1	176.3	385241.2	4.09	8.19	
55-3447	OZ	101.5	135.72	0.938	40	44	47.1	50.2	2029.5	14.03	28.25	B1
		5455.8	3447.4	23.812	1016	214.8	230	245.3	277152.9	4.28	8.61	
55-3025	OZ	101.5	119.1	0.875	38	44.9	48.2	51.6	1928.3	13.8	27.8	A2
		5456.4	3025.2	22.225	965	219.4	235.5	251.7	263326.6	4.21	8.47	
55-2374	OZ	101.5	93.48	0.75	36	45.4	48.4	51.5	1827.6	10.81	21.63	A3
		5458.9	2374.4	19.05	914	221.7	236.5	251.4	249579.3	3.3	6.59	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
55-2425	OZ	101.6	95.48	0.688	38	43.4	46.4	49.4	1930.5	11.08	22.15	A3
		5462.8	2425.2	17.462	965	211.9	226.4	241	263632.8	3.38	6.75	
55-3307	OZ	102	130.21	0.875	40	43.5	46.8	50.1	2040	14.06	28.32	B2
		5484	3307.4	22.225	1016	212.5	228.5	244.4	278586.4	4.29	8.63	
55-3063	OZ	102.2	120.59	0.438	53	32.8	35.4	38	2759.8	13.17	26.34	B3
		5495.5	3063	11.112	1371	160	172.7	185.5	376878.6	4.01	8.03	
55-3216	OZ	102.3	126.61	0.875	40	44	47.1	50.2	2046	14.03	28.25	A1
		5500.1	3216	22.225	1016	214.9	230	245.2	279404.8	4.28	8.61	
55-3178	OZ	102.4	125.1	0.688	43	40	43.2	46.3	2253.1	14.59	29.37	A2
		5506.2	3177.6	17.462	1117	195.3	210.7	226.1	307685	4.45	8.95	
55-3612	OZ	102.6	142.21	0.562	52	35.1	38.1	41.1	2667.5	15.63	31.46	B2
		5516	3612.2	14.288	1320	171.2	185.8	200.4	364274.6	4.76	9.59	
55-2555	OZ	102.8	100.59	0.938	34	48.9	52.1	55.2	1747.4	10.55	21.11	B3
		5526.2	2555	23.812	863	238.9	254.2	269.4	238622.4	3.22	6.43	
55-3076	OZ	102.8	121.1	0.812	40	43.5	46.8	50	2056.7	14.06	28.32	A2
		5528.9	3076	20.638	1016	212.4	228.3	244.2	280866.6	4.29	8.63	
55-3714	OZ	102.9	146.21	0.5	56	33.1	36	38.9	2882.1	16.16	32.51	B2
		5534	3713.8	12.7	1422	161.5	175.7	189.9	393576	4.92	9.91	
55-3651	OZ	103	143.72	0.688	48	37.9	40.8	43.8	2471.2	15.08	30.35	B1
		5535.8	3650.6	17.462	1219	185	199.4	213.8	337462.9	4.6	9.25	
55-3803	OZ	103	149.72	0.562	53	34.3	37.1	39.9	2781.9	15.86	31.92	B1
		5539.3	3803	14.288	1371	167.2	181.1	194.9	379887.4	4.83	9.73	
55-3358	OZ	103.1	132.21	0.812	42	42.1	45.3	48.6	2164.6	14.32	28.84	B2
		5541.8	3358.2	20.638	1066	205.7	221.4	237.1	295599.3	4.37	8.79	
55-3409	OZ	103.2	134.21	0.75	43	40.5	43.7	46.8	2269.4	14.59	29.37	B2
		5545.9	3409	19.05	1117	197.8	213.3	228.7	309905.8	4.45	8.95	
55-3127	OZ	103.2	123.1	0.75	42	41.9	45.1	48.3	2166.6	14.32	28.84	A2
		5546.9	3126.8	19.05	1066	204.4	220	235.7	295871.7	4.37	8.79	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
56-3498	OZ	103.3	137.72	0.875	42	42.8	45.8	48.9	2170.3	14.29	28.78	B1
		5556.3	3498.2	22.225	1066	208.8	223.8	238.8	296374.4	4.36	8.77	
56-3330	OZ	103.4	131.1	0.562	50	36.2	39.2	42.3	2584.9	15.37	30.94	A2
		5558.9	3330	14.288	1270	176.9	191.6	206.3	352991.8	4.68	9.43	
56-3521	OZ	103.4	138.61	0.562	52	35.3	38.1	41	2689.3	15.6	31.4	A1
		5561	3520.8	14.288	1320	172.3	186.2	200	367246.6	4.75	9.57	
56-3267	OZ	103.5	128.61	0.812	42	42.6	45.6	48.7	2174	14.29	28.78	A1
		5565.8	3266.8	20.638	1066	207.8	222.7	237.7	296881	4.36	8.77	
56-2961	OZ	103.5	116.59	0.5	50	35.3	38	40.7	2588.4	12.65	25.29	B3
		5566.4	2961.4	12.7	1270	172.5	185.7	198.9	353466	3.85	7.71	
56-3318	OZ	103.7	130.61	0.75	43	40.9	43.9	46.9	2281.5	14.55	29.3	A1
		5575.6	3317.6	19.05	1117	199.7	214.4	229.1	311562	4.44	8.93	
56-2273	OZ	103.7	89.48	0.938	31	51.3	54.5	57.6	1659.6	10.29	20.58	A3
		5576.7	2272.8	23.812	812	250.4	265.9	281.4	226639	3.14	6.27	
56-3622	OZ	103.9	142.61	0.5	56	33.2	36	38.8	2908.7	16.12	32.44	A1
		5585	3622.4	12.7	1422	162.3	175.8	189.2	397204.1	4.91	9.89	
56-3012	OZ	104	118.59	0.472	52	34.3	37	39.6	2703.3	12.91	25.82	B3
		5589.9	3012.2	12	1320	167.5	180.4	193.4	369158.5	3.93	7.87	
56-3432	OZ	104	135.1	0.5	53	34.2	37.1	40	2808.3	15.89	31.98	A2
		5591.9	3431.6	12.7	1371	166.8	181.1	195.3	383492.5	4.84	9.75	
56-3482	OZ	104.1	137.1	0.472	56	33.2	36.1	38.9	2915.8	16.16	32.51	A2
		5598.6	3482.4	12	1422	162	176.1	190.1	398174.5	4.92	9.91	
56-3549	OZ	104.3	139.72	0.812	43	41.3	44.4	47.4	2293.9	14.55	29.3	B1
		5605.7	3549	20.638	1117	201.8	216.6	231.4	313246.5	4.44	8.93	
56-2578	OZ	104.5	101.48	0.562	43	39.3	42.1	44.9	2298.6	11.86	23.72	A3
		5617.2	2577.6	14.288	1117	191.8	205.5	219.2	313890.9	3.62	7.23	
56-2974	OZ	104.7	117.1	1	36	48.5	51.8	55.2	1885.3	13.54	27.27	A2
		5631.1	2974.4	25.4	914	236.6	253	269.5	257454.5	4.13	8.31	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
56-2974	OZ	104.7	117.1	1	36	48.5	51.8	55.2	1885.3	13.54	27.27	A2
		5631.1	2974.4	25.4	914	236.6	253	269.5	257454.5	4.13	8.31	
56-2781	OZ	104.9	109.48	0.438	52	34.2	36.8	39.4	2727.7	12.91	25.82	A3
		5640.3	2780.8	11.112	1320	167.1	179.8	192.4	372488.2	3.93	7.87	
57-2809	OZ	105.4	110.59	0.625	43	40	42.8	45.7	2318.2	11.86	23.72	B3
		5665.2	2809	15.875	1117	195.3	209.2	223.1	316571.8	3.62	7.23	
57-2882	OZ	105.4	113.48	0.394	56	32.3	34.8	37.3	2951.9	13.43	26.87	A3
		5668	2882.4	10	1422	157.5	169.8	182	403108.2	4.09	8.19	
57-2606	OZ	105.5	102.59	0.875	36	47.6	50.7	53.8	1898.6	10.81	21.63	B3
		5670.7	2605.8	22.225	914	232.6	247.6	262.6	259265.6	3.3	6.59	
57-3257	OZ	105.7	128.21	1	38	47	50.3	53.6	2007.9	13.8	27.8	B2
		5681.6	3256.6	25.4	965	229.3	245.5	261.7	274193.9	4.21	8.47	
57-3165	OZ	105.9	124.61	1	38	47.6	50.7	53.9	2013	13.77	27.73	A1
		5696.2	3165.2	25.4	965	232.2	247.6	263	274898.6	4.2	8.45	
57-2679	OZ	106.1	105.48	0.5	48	37	39.7	42.4	2545.7	12.39	24.77	A3
		5702.7	2679.2	12.7	1219	180.5	193.7	206.8	347636.7	3.78	7.55	
57-3561	OZ	106.5	140.21	0.625	50	37.3	40.4	43.4	2661.3	15.37	30.94	B2
		5723.1	3561.4	15.875	1270	182.3	197.1	211.9	363419.6	4.68	9.43	
57-2730	OZ	106.6	107.48	0.472	50	35.9	38.5	41.2	2665.4	12.65	25.29	A3
		5732	2730	12	1270	175.1	188	200.9	363981	3.85	7.71	
57-2324	OZ	106.7	91.48	0.875	34	50	53.1	56.2	1814.1	10.55	21.11	A3
		5737	2323.6	22.225	863	244	259.1	274.3	247724.7	3.22	6.43	
58-3279	OZ	107.1	129.1	0.625	48	38.6	41.6	44.7	2569.9	15.11	30.41	A2
		5756.9	3279.2	15.875	1219	188.4	203.3	218.3	350943.1	4.61	9.27	
58-3752	OZ	107.1	147.72	0.625	52	36.5	39.4	42.2	2785	15.6	31.4	B1
		5758.9	3752.2	15.875	1320	178.2	192.2	206.2	380316.1	4.75	9.57	
58-2657	OZ	107.2	104.59	0.812	38	46.1	49.1	52.1	2036.3	11.08	22.15	B3
		5761.9	2656.6	20.638	965	225.1	239.8	254.5	278068.7	3.38	6.75	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
58-2758	OZ	107.2	108.59	0.688	42	42.3	45.2	48.1	2251.3	11.6	23.2	B3
		5763.7	2758.2	17.462	1066	206.3	220.5	234.6	307435.7	3.54	7.07	
58-3470	OZ	107.3	136.61	0.625	50	37.6	40.5	43.4	2683.2	15.34	30.87	A1
		5770.3	3470	15.875	1270	183.7	197.7	211.8	366412.7	4.67	9.41	
58-3447	OZ	107.5	135.72	1	40	46.2	49.4	52.5	2149.2	14.03	28.25	B1
		5777.4	3447.4	25.4	1016	225.8	241	256.3	293493.6	4.28	8.61	
58-3447	OZ	107.5	135.72	1	40	46.2	49.4	52.5	2149.2	14.03	28.25	B1
		5777.4	3447.4	25.4	1016	225.8	241	256.3	293493.8	4.28	8.61	
58-2527	OZ	107.5	99.48	0.625	42	41.9	44.8	47.6	2258.1	11.6	23.2	A3
		5781	2526.8	15.875	1066	204.7	218.6	232.6	308357.7	3.54	7.07	
58-3025	OZ	107.7	119.1	0.938	38	47.4	50.7	54	2045.5	13.8	27.8	A2
		5788	3025.2	23.812	965	231.3	247.4	263.6	279329.5	4.21	8.47	
58-3114	OZ	107.7	122.59	0.438	56	33.1	35.7	38.3	3015.2	13.43	26.87	B3
		5789.6	3113.8	11.112	1422	161.8	174.4	186.9	411757.1	4.09	8.19	
58-2707	OZ	107.8	106.59	0.75	40	44.3	47.3	50.2	2155.5	11.34	22.68	B3
		5794.5	2707.4	19.05	1016	216.3	230.7	245.1	294358.9	3.46	6.91	
58-3307	OZ	108.3	130.21	0.938	40	45.9	49.1	52.4	2166	14.06	28.32	B2
		5822.6	3307.4	23.812	1016	224	239.9	255.9	295787.5	4.29	8.63	
58-2555	OZ	108.5	100.59	1	34	51.5	54.6	57.7	1843.9	10.55	21.11	B3
		5831.4	2555	25.4	863	251.4	266.6	281.9	251801.3	3.22	6.43	
58-3663	OZ	108.7	144.21	0.562	53	35.6	38.5	41.5	2933.8	15.89	31.98	B2
		5841.9	3663	14.288	1371	173.8	188.1	202.5	400639.6	4.84	9.75	
58-2374	OZ	108.7	93.48	0.812	36	48.4	51.4	54.4	1956.3	10.81	21.63	A3
		5843.2	2374.4	20.638	914	236.1	251	265.8	267151.4	3.3	6.59	
58-2911	OZ	108.7	114.59	0.562	48	38.1	40.9	43.6	2609.1	12.39	24.77	B3
		5844.7	2910.6	14.288	1219	186.1	199.5	213	356294.3	3.78	7.55	
58-3216	OZ	108.8	126.61	0.938	40	46.4	49.5	52.6	2175.6	14.03	28.25	A1
		5848.3	3216	23.812	1016	226.7	241.9	257	297094.8	4.28	8.61	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
59-3955	OZ	108.8	155.72	0.5	60	32.7	35.4	38.1	3264.3	16.65	33.49	B1
		5850.1	3955.4	12.7	1524	159.6	172.9	186.2	445775.9	5.07	10.21	
59-3511	OZ	109.1	138.21	0.688	48	39.4	42.5	45.6	2617.4	15.11	30.41	B2
		5863.3	3510.6	17.462	1219	192.5	207.5	222.5	357424	4.61	9.27	
59-3854	OZ	109.1	151.72	0.562	56	34.8	37.5	40.3	3055.9	16.12	32.44	B1
		5867.6	3853.8	14.288	1422	169.7	183.3	197	417305.5	4.91	9.89	
59-2476	OZ	109.2	97.48	0.688	40	44.3	47.2	50.1	2183.7	11.34	22.68	A3
		5870.2	2476	17.462	1016	216.4	230.6	244.8	298208.5	3.46	6.91	
59-2273	OZ	109.3	89.48	1	31	54	57.2	60.3	1749.1	10.29	20.58	A3
		5877.2	2272.8	25.4	812	263.5	279	294.6	238851.3	3.14	6.27	
59-2425	OZ	109.5	95.48	0.75	38	46.5	49.4	52.4	2081.3	11.08	22.15	A3
		5889.4	2425.2	19.05	965	226.9	241.4	255.9	284222	3.38	6.75	
59-3012	OZ	109.6	118.59	0.5	52	35.8	38.5	41.1	2848.8	12.91	25.82	B3
		5890.8	3012.2	12.7	1320	174.9	187.9	200.8	389027.7	3.93	7.87	
59-3381	OZ	109.6	133.1	0.562	52	36.8	39.7	42.7	2850.1	15.63	31.46	A2
		5893.5	3380.8	14.288	1320	179.6	194	208.5	389207.5	4.76	9.59	
59-3076	OZ	109.7	121.1	0.875	40	46	49.3	52.6	2193.5	14.06	28.32	A2
		5896.5	3076	22.225	1016	224.8	240.7	256.6	299543.8	4.29	8.63	
59-3572	OZ	109.7	140.61	0.562	53	35.8	38.6	41.4	2962.1	15.86	31.92	A1
		5898.2	3571.6	14.288	1371	174.9	188.5	202.2	404499.9	4.83	9.73	
59-3482	OZ	109.8	137.1	0.5	56	34.6	37.5	40.4	3073.6	16.16	32.51	A2
		5901.7	3482.4	12.7	1422	168.9	183	197	419728.6	4.92	9.91	
59-3063	OZ	109.8	120.59	0.472	53	34.7	37.4	40	2964.1	13.17	26.34	B3
		5902.3	3063	12	1371	169.6	182.4	195.1	404779.4	4.01	8.03	
59-3419	OZ	109.9	134.61	0.688	48	39.8	42.7	45.6	2638.4	15.08	30.35	A1
		5910.5	3419.2	17.462	1219	194.2	208.4	222.7	360301.2	4.6	9.25	
59-3701	OZ	109.9	145.72	0.688	50	38.6	41.5	44.4	2748.7	15.34	30.87	B1
		5911.2	3701.4	17.462	1270	188.4	202.6	216.8	375358.5	4.67	9.41	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
59-3498	OZ	110	137.72	0.938	42	45.1	48.2	51.3	2309.1	14.29	28.78	B1
		5911.7	3498.2	23.812	1066	220.2	235.2	250.3	315328.4	4.36	8.77	
59-3358	OZ	110	132.21	0.875	42	44.6	47.8	51	2310.6	14.32	28.84	B2
		5915.4	3358.2	22.225	1066	217.6	233.3	249	315528.5	4.37	8.79	
59-2832	OZ	110.6	111.48	0.438	53	34.6	37.2	39.7	2985.4	13.17	26.34	A3
		5944.6	2831.6	11.112	1371	169	181.5	193.9	407677.4	4.01	8.03	
59-3178	OZ	110.7	125.1	0.75	43	42.7	45.9	49	2434.7	14.59	29.37	A2
		5949.8	3177.6	19.05	1117	208.6	224	239.4	332473.8	4.45	8.95	
59-3267	OZ	110.7	128.61	0.875	42	45.1	48.1	51.2	2324	14.29	28.78	A1
		5949.9	3266.8	22.225	1066	220.1	235	249.9	317367.7	4.36	8.77	
60-3127	OZ	110.7	123.1	0.812	42	44.5	47.7	50.9	2324.8	14.32	28.84	A2
		5951.9	3126.8	20.638	1066	217.2	232.9	248.5	317475.3	4.37	8.79	
60-3409	OZ	110.8	134.21	0.812	43	43	46.2	49.4	2437.1	14.59	29.37	B2
		5955.8	3409	20.638	1117	210.2	225.6	241.1	332808.1	4.45	8.95	
60-3549	OZ	111.5	139.72	0.875	43	43.8	46.8	49.8	2453.5	14.55	29.3	B1
		5995.9	3549	22.225	1117	213.6	228.4	243.3	335052.7	4.44	8.93	
60-3318	OZ	111.5	130.61	0.812	43	43.5	46.5	49.5	2453.9	14.55	29.3	A1
		5996.7	3317.6	20.638	1117	212.4	227.1	241.8	335095.2	4.44	8.93	
60-3651	OZ	111.6	143.72	0.75	48	40.5	43.4	46.4	2678.1	15.08	30.35	B1
		5999.2	3650.6	19.05	1219	197.7	212.1	226.5	365713	4.6	9.25	
60-2606	OZ	111.8	102.59	0.938	36	50.3	53.4	56.5	2013.3	10.81	21.63	B3
		6013.4	2605.8	23.812	914	245.7	260.7	275.6	274930.6	3.3	6.59	
60-2730	OZ	112.3	107.48	0.5	50	37.5	40.1	42.8	2807.8	12.65	25.29	A3
		6038.2	2730	12.7	1270	183	195.9	208.8	383426.4	3.85	7.71	
61-2781	OZ	112.6	109.48	0.472	52	36.3	38.9	41.5	2928.2	12.91	25.82	A3
		6055.1	2780.8	12	1320	177.3	190	202.7	399877.4	3.93	7.87	
61-2324	OZ	113	91.48	0.938	34	52.8	55.9	59	1921.4	10.55	21.11	A3
		6076.6	2323.6	23.812	863	257.7	272.9	288.1	262386	3.22	6.43	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in ³ /ft (cm ³ /m)	in (mm)	in (mm)		in (mm)	lb/ft ² (kg/m ²)	
61-3612	OZ	113	142.21	0.625	52	37.9	40.9	43.9	2939.2	15.63	31.46	B2
		6077.8	3612.2	15.875	1320	185.2	199.8	214.4	401376.6	4.76	9.59	
61-3025	OZ	113.8	119.1	1	38	49.8	53.1	56.4	2161.5	13.8	27.8	A2
		6116.2	3025.2	25.4	965	243.1	259.3	275.5	295167.2	4.21	8.47	
61-3803	OZ	113.8	149.72	0.625	53	37.1	39.9	42.7	3071.6	15.86	31.92	B1
		6116.3	3803	15.875	1371	181.1	194.9	208.7	419456.2	4.83	9.73	
61-3330	OZ	113.8	131.1	0.625	50	39.2	42.2	45.2	2846.2	15.37	30.94	A2
		6120.8	3330	15.875	1270	191.5	206.2	220.9	388673.5	4.68	9.43	
61-3521	OZ	114.2	138.61	0.625	52	38.2	41.1	43.9	2968	15.6	31.4	A1
		6137.4	3520.8	15.875	1320	186.7	200.5	214.4	405311.8	4.75	9.57	
61-3815	OZ	114.3	150.21	0.5	60	33.9	36.7	39.6	3427.9	16.68	33.56	B2
		6143.3	3815.4	12.7	1524	165.5	179.3	193.2	468116.8	5.08	10.23	
61-2657	OZ	114.3	104.59	0.875	38	48.9	51.9	54.9	2171.1	11.08	22.15	B3
		6143.4	2656.6	22.225	965	238.7	253.4	268.1	296481.3	3.38	6.75	
62-3307	OZ	114.5	130.21	1	40	48.2	51.5	54.8	2290.7	14.06	28.32	B2
		6157.9	3307.4	25.4	1016	235.4	251.4	267.3	312820	4.29	8.63	
62-3307	OZ	114.5	130.21	1	40	48.2	51.5	54.8	2290.7	14.06	28.32	B2
		6157.9	3307.4	25.4	1016	235.4	251.4	267.3	312820.1	4.29	8.63	
62-2809	OZ	114.8	110.59	0.688	43	43.1	45.9	48.8	2525.4	11.86	23.72	B3
		6171.5	2809	17.462	1117	210.4	224.3	238.2	344861.6	3.62	7.23	
62-2578	OZ	114.8	101.48	0.625	43	42.7	45.5	48.3	2526.3	11.86	23.72	A3
		6173.8	2577.6	15.875	1117	208.4	222	235.7	344991.5	3.62	7.23	
62-3714	OZ	114.9	146.21	0.562	56	36.1	39	41.9	3216.1	16.16	32.51	B2
		6175.3	3713.8	14.288	1422	176.2	190.4	204.6	439184.3	4.92	9.91	
62-3216	OZ	115.2	126.61	1	40	48.8	51.9	55.1	2303.9	14.03	28.25	A1
		6193.1	3216	25.4	1016	238.5	253.6	268.8	314611.3	4.28	8.61	
62-3216	OZ	115.2	126.61	1	40	48.8	51.9	55.1	2303.9	14.03	28.25	A1
		6193.1	3216	25.4	1016	238.5	253.6	268.8	314611.4	4.28	8.61	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
62-2961	OZ	115.4	116.59	0.562	50	38.7	41.4	44.1	2884.4	12.65	25.29	B3
		6203.1	2961.4	14.288	1270	189	202.2	215.3	393894.5	3.85	7.71	
62-3724	OZ	115.6	146.61	0.5	60	34.1	36.8	39.4	3467.2	16.65	33.49	A1
		6213.6	3724	12.7	1524	166.4	179.5	192.6	473475.3	5.07	10.21	
62-2707	OZ	115.6	106.59	0.812	40	47.2	50.1	53.1	2312.5	11.34	22.68	B3
		6216.3	2707.4	20.638	1016	230.4	244.8	259.2	315787.2	3.46	6.91	
62-3114	OZ	115.7	122.59	0.472	56	35.2	37.7	40.3	3239.8	13.43	26.87	B3
		6220.8	3113.8	12	1422	171.7	184.2	196.8	442423.8	4.09	8.19	
62-3063	OZ	115.7	120.59	0.5	53	36.3	38.9	41.5	3124.7	13.17	26.34	B3
		6222.1	3063	12.7	1371	177.2	190	202.7	426708.8	4.01	8.03	
62-2374	OZ	115.8	93.48	0.875	36	51.3	54.3	57.4	2083.6	10.81	21.63	A3
		6223.4	2374.4	22.225	914	250.5	265.3	280.2	284532.6	3.3	6.59	
62-2758	OZ	115.8	108.59	0.75	42	45.3	48.2	51.1	2432.3	11.6	23.2	B3
		6227.1	2758.2	19.05	1066	220.9	235.1	249.3	332154.4	3.54	7.07	
62-3432	OZ	116	135.1	0.562	53	37.3	40.2	43.1	3131.7	15.89	31.98	A2
		6235.9	3431.6	14.288	1371	182.1	196.4	210.6	427655.5	4.84	9.75	
62-3622	OZ	116.1	142.61	0.562	56	36.3	39.1	41.8	3251.1	16.12	32.44	A1
		6242.5	3622.4	14.288	1422	177.4	190.8	204.3	443963.1	4.91	9.89	
62-3561	OZ	116.1	140.21	0.688	50	40.1	43.2	46.2	2903.7	15.37	30.94	B2
		6244.5	3561.4	17.462	1270	195.9	210.7	225.5	396524.6	4.68	9.43	
63-2882	OZ	116.3	113.48	0.438	56	35	37.5	40	3257.3	13.43	26.87	A3
		6254.4	2882.4	11.112	1422	170.9	183.1	195.3	444813.1	4.09	8.19	
63-3076	OZ	116.4	121.1	0.938	40	48.6	51.8	55.1	2329	14.06	28.32	A2
		6260.6	3076	23.812	1016	237.1	253	268.9	318038.9	4.29	8.63	
63-3498	OZ	116.5	137.72	1	42	47.4	50.5	53.6	2446.6	14.29	28.78	B1
		6263.7	3498.2	25.4	1066	231.6	246.6	261.6	334106.5	4.36	8.77	
63-3498	OZ	116.5	137.72	1	42	47.4	50.5	53.6	2446.6	14.29	28.78	B1
		6263.7	3498.2	25.4	1066	231.6	246.6	261.6	334106.7	4.36	8.77	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
63-3279	OZ	116.8	129.1	0.688	48	41.5	44.5	47.6	2802.1	15.11	30.41	A2
		6277	3279.2	17.462	1219	202.6	217.5	232.4	382646	4.61	9.27	
63-3358	OZ	116.9	132.21	0.938	42	47	50.2	53.4	2455.2	14.32	28.84	B2
		6285.6	3358.2	23.812	1066	229.5	245.2	260.9	335272.7	4.37	8.79	
63-2527	OZ	117	99.48	0.688	42	45.2	48.1	50.9	2457.5	11.6	23.2	A3
		6291.5	2526.8	17.462	1066	220.7	234.6	248.6	335590.2	3.54	7.07	
63-3752	OZ	117.1	147.72	0.688	52	39.3	42.1	45	3044.6	15.6	31.4	B1
		6295.8	3752.2	17.462	1320	191.6	205.7	219.7	415772.6	4.75	9.57	
63-3470	OZ	117.3	136.61	0.688	50	40.5	43.4	46.2	2932	15.34	30.87	A1
		6305.3	3470	17.462	1270	197.6	211.7	225.7	400389.6	4.67	9.41	
63-2425	OZ	117.4	95.48	0.812	38	49.5	52.5	55.5	2230.5	11.08	22.15	A3
		6311.7	2425.2	20.638	965	241.8	256.4	270.9	304600.5	3.38	6.75	
63-3267	OZ	117.7	128.61	0.938	42	47.6	50.6	53.7	2472.7	14.29	28.78	A1
		6330.4	3266.8	23.812	1066	232.3	247.2	262.2	337664.4	4.36	8.77	
63-2476	OZ	117.8	97.48	0.75	40	47.5	50.4	53.3	2357	11.34	22.68	A3
		6336	2476	19.05	1016	231.9	246.1	260.3	321868.8	3.46	6.91	
63-3511	OZ	118	138.21	0.75	48	42.1	45.2	48.3	2832.5	15.11	30.41	B2
		6345.2	3510.6	19.05	1219	205.7	220.7	235.7	386800.7	4.61	9.27	
63-2679	OZ	118.1	105.48	0.562	48	40.5	43.2	45.9	2834.4	12.39	24.77	A3
		6349.5	2679.2	14.288	1219	197.9	211.1	224.2	387067.1	3.78	7.55	
64-2606	OZ	118.2	102.59	1	36	53	56	59.1	2126.7	10.81	21.63	B3
		6352.2	2605.8	25.4	914	258.7	273.7	288.6	290424.8	3.3	6.59	
64-2606	OZ	118.2	102.59	1	36	53	56	59.1	2126.7	10.81	21.63	B3
		6352.3	2605.8	25.4	914	258.7	273.7	288.6	290424.9	3.3	6.59	
64-3127	OZ	118.2	123.1	0.875	42	47.1	50.3	53.5	2481.6	14.32	28.84	A2
		6353.2	3126.8	22.225	1066	230	245.7	261.3	338879.3	4.37	8.79	
64-3409	OZ	118.3	134.21	0.875	43	45.6	48.7	51.9	2603.3	14.59	29.37	B2
		6362	3409	22.225	1117	222.5	238	253.5	355509.7	4.45	8.95	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
64-2781	OZ	118.7	109.48	0.5	52	38	40.6	43.2	3085.8	12.91	25.82	A3
		6381	2780.8	12.7	1320	185.4	198	210.7	421400	3.93	7.87	
64-3549	OZ	118.7	139.72	0.938	43	46.2	49.2	52.2	2611.8	14.55	29.3	B1
		6382.7	3549	23.812	1117	225.4	240.3	255.1	356667.2	4.44	8.93	
64-2832	OZ	118.8	111.48	0.472	53	36.8	39.3	41.9	3206.4	13.17	26.34	A3
		6384.6	2831.6	12	1371	179.4	191.9	204.3	437858.2	4.01	8.03	
64-3178	OZ	118.8	125.1	0.812	43	45.4	48.6	51.8	2614.6	14.59	29.37	A2
		6389.5	3177.6	20.638	1117	221.9	237.3	252.7	357043.9	4.45	8.95	
64-3419	OZ	119.1	134.61	0.75	48	42.5	45.5	48.4	2859.3	15.08	30.35	A1
		6405.2	3419.2	19.05	1219	207.7	222	236.2	390463.3	4.6	9.25	
64-3701	OZ	119.2	145.72	0.75	50	41.3	44.2	47.1	2980.2	15.34	30.87	B1
		6408.9	3701.4	19.05	1270	201.4	215.6	229.8	406968.2	4.67	9.41	
64-2324	OZ	119.3	91.48	1	34	55.6	58.7	61.8	2027.5	10.55	21.11	A3
		6412.2	2323.6	25.4	863	271.5	286.6	301.8	276877.3	3.22	6.43	
64-3318	OZ	119.3	130.61	0.875	43	46.1	49.1	52.1	2624.7	14.55	29.3	A1
		6414.1	3317.6	22.225	1117	225.1	239.8	254.5	358422.3	4.44	8.93	
64-2911	OZ	119.7	114.59	0.625	48	41.4	44.1	46.9	2872.8	12.39	24.77	B3
		6435.4	2910.6	15.875	1219	202.1	215.5	228.9	392300.3	3.78	7.55	
64-3663	OZ	119.8	144.21	0.625	53	38.5	41.5	44.4	3234.7	15.89	31.98	B2
		6441	3663	15.875	1371	188.1	202.5	216.9	441720.6	4.84	9.75	
65-3651	OZ	120.1	143.72	0.812	48	43.1	46	49	2883.3	15.08	30.35	B1
		6458.9	3650.6	20.638	1219	210.3	224.7	239.1	393735.8	4.6	9.25	
65-3854	OZ	120.6	151.72	0.625	56	37.7	40.4	43.2	3375.5	16.12	32.44	B1
		6481.5	3853.8	15.875	1422	183.8	197.5	211.1	460961.1	4.91	9.89	
65-3381	OZ	120.8	133.1	0.625	52	39.8	42.8	45.8	3140.4	15.63	31.46	A2
		6493.8	3380.8	15.875	1320	194.5	209	223.5	428849	4.76	9.59	
65-3572	OZ	121.1	140.61	0.625	53	38.8	41.6	44.4	3270.6	15.86	31.92	A1
		6512.6	3571.6	15.875	1371	189.6	203.2	216.9	446632.3	4.83	9.73	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
65-2657	OZ	121.3	104.59	0.938	38	51.7	54.7	57.7	2304.5	11.08	22.15	B3
		6521	2656.6	23.812	965	252.2	266.9	281.6	314704.6	3.38	6.75	
65-3584	OZ	121.6	141.1	0.5	60	35.4	38.2	41	3649.3	16.68	33.56	A2
		6539.9	3584	12.7	1524	173	186.7	200.3	498340.6	5.08	10.23	
65-3955	OZ	121.7	155.72	0.562	60	35.7	38.4	41.2	3651.5	16.65	33.49	B1
		6544	3955.4	14.288	1524	174.4	187.7	201	498650.4	5.07	10.21	
66-3114	OZ	122	122.59	0.5	56	36.7	39.3	41.9	3416.3	13.43	26.87	B3
		6559.7	3113.8	12.7	1422	179.4	192	204.5	466529.4	4.09	8.19	
66-3012	OZ	122.2	118.59	0.562	52	39.3	41.9	44.6	3177	12.91	25.82	B3
		6569.5	3012.2	14.288	1320	191.7	204.7	217.7	433852.1	3.93	7.87	
66-3482	OZ	122.5	137.1	0.562	56	37.8	40.7	43.6	3429.8	16.16	32.51	A2
		6585.6	3482.4	14.288	1422	184.6	198.7	212.7	468367.4	4.92	9.91	
66-2374	OZ	122.7	93.48	0.938	36	54.2	57.3	60.3	2209.5	10.81	21.63	A3
		6599.4	2374.4	23.812	914	264.8	279.6	294.5	301724.3	3.3	6.59	
66-3076	OZ	123.2	121.1	1	40	51.1	54.3	57.6	2463.1	14.06	28.32	A2
		6621.1	3076	25.4	1016	249.4	265.3	281.3	336352.6	4.29	8.63	
66-3076	OZ	123.2	121.1	1	40	51.1	54.3	57.6	2463.1	14.06	28.32	A2
		6621.1	3076	25.4	1016	249.4	265.3	281.3	336352.8	4.29	8.63	
66-2707	OZ	123.4	106.59	0.875	40	50.1	53	56	2467.9	11.34	22.68	B3
		6634	2707.4	22.225	1016	244.5	258.9	273.3	337007.2	3.46	6.91	
66-3612	OZ	123.4	142.21	0.688	52	40.8	43.8	46.8	3208.9	15.63	31.46	B2
		6635.5	3612.2	17.462	1320	199.2	213.8	228.4	438207.4	4.76	9.59	
67-3358	OZ	123.7	132.21	1	42	49.4	52.7	55.9	2598.4	14.32	28.84	B2
		6652.3	3358.2	25.4	1066	241.4	257.1	272.8	354833.6	4.37	8.79	
67-3358	OZ	123.7	132.21	1	42	49.4	52.7	55.9	2598.4	14.32	28.84	B2
		6652.3	3358.2	25.4	1066	241.4	257.1	272.8	354833.8	4.37	8.79	
67-2809	OZ	124.1	110.59	0.75	43	46.2	49	51.9	2730.7	11.86	23.72	B3
		6673.3	2809	19.05	1117	225.4	239.3	253.2	372903.2	3.62	7.23	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
67-3330	OZ	124.2	131.1	0.688	50	42.2	45.2	48.2	3105.5	15.37	30.94	A2
		6678.4	3330	17.462	1270	206.1	220.8	235.4	424078.9	4.68	9.43	
67-2758	OZ	124.4	108.59	0.812	42	48.2	51.1	54	2611.7	11.6	23.2	B3
		6686.3	2758.2	20.638	1066	235.5	249.7	263.8	356645	3.54	7.07	
67-3803	OZ	124.4	149.72	0.688	53	39.9	42.7	45.6	3359.3	15.86	31.92	B1
		6689.2	3803	17.462	1371	194.8	208.7	222.5	458746.2	4.83	9.73	
67-3267	OZ	124.8	128.61	1	42	50.1	53.1	56.2	2619.9	14.29	28.78	A1
		6707.4	3266.8	25.4	1066	244.5	259.4	274.3	357772.5	4.36	8.77	
67-3267	OZ	124.8	128.61	1	42	50.1	53.1	56.2	2619.9	14.29	28.78	A1
		6707.4	3266.8	25.4	1066	244.5	259.4	274.3	357772.7	4.36	8.77	
67-3521	OZ	124.8	138.61	0.688	52	41.2	44	46.8	3244.7	15.6	31.4	A1
		6709.6	3520.8	17.462	1320	201	214.8	228.7	443098.7	4.75	9.57	
67-2882	OZ	125	113.48	0.472	56	37.2	39.7	42.2	3499.9	13.43	26.87	A3
		6720.2	2882.4	12	1422	181.5	193.7	205.9	477941.7	4.09	8.19	
67-2578	OZ	125.1	101.48	0.688	43	46	48.8	51.6	2752.1	11.86	23.72	A3
		6725.5	2577.6	17.462	1117	224.8	238.5	252.2	375821	3.62	7.23	
67-2730	OZ	125.2	107.48	0.562	50	41.1	43.8	46.4	3128.9	12.65	25.29	A3
		6728.8	2730	14.288	1270	200.8	213.7	226.6	427281.8	3.85	7.71	
67-2425	OZ	125.2	95.48	0.875	38	52.6	55.6	58.5	2378.2	11.08	22.15	A3
		6729.6	2425.2	22.225	965	256.7	271.2	285.8	324770	3.38	6.75	
67-2832	OZ	125.2	111.48	0.5	53	38.4	41	43.5	3380.1	13.17	26.34	A3
		6730.5	2831.6	12.7	1371	187.6	200.1	212.5	461579.7	4.01	8.03	
68-3127	OZ	125.6	123.1	0.938	42	49.7	52.9	56.1	2636.8	14.32	28.84	A2
		6750.7	3126.8	23.812	1066	242.8	258.5	274.1	360084.7	4.37	8.79	
68-3561	OZ	125.8	140.21	0.75	50	42.9	45.9	49	3144.3	15.37	30.94	B2
		6761.8	3561.4	19.05	1270	209.4	224.2	239.1	429376.8	4.68	9.43	
68-3409	OZ	125.8	134.21	0.938	43	48.1	51.3	54.4	2768.1	14.59	29.37	B2
		6764.7	3409	23.812	1117	234.8	250.3	265.8	378011.9	4.45	8.95	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
68-3549	OZ	125.8	139.72	1	43	48.6	51.6	54.7	2768.7	14.55	29.3	B1
		6766.1	3549	25.4	1117	237.2	252	266.9	378087.3	4.44	8.93	
68-3279	OZ	126.3	129.1	0.75	48	44.4	47.4	50.5	3032.4	15.11	30.41	A2
		6792.9	3279.2	19.05	1219	216.7	231.6	246.5	414095.7	4.61	9.27	
68-2476	OZ	126.4	97.48	0.812	40	50.7	53.6	56.5	2528.6	11.34	22.68	A3
		6797.2	2476	20.638	1016	247.3	261.5	275.8	345299.8	3.46	6.91	
68-2527	OZ	126.4	99.48	0.75	42	48.5	51.3	54.2	2655.1	11.6	23.2	A3
		6797.4	2526.8	19.05	1066	236.7	250.6	264.5	362572.5	3.54	7.07	
68-3714	OZ	126.7	146.21	0.625	56	39.1	42	44.9	3547.8	16.16	32.51	B2
		6812.2	3713.8	15.875	1422	190.9	205.1	219.3	484485.6	4.92	9.91	
68-3511	OZ	126.9	138.21	0.812	48	44.8	47.9	51	3045.9	15.11	30.41	B2
		6823.2	3510.6	20.638	1219	218.8	233.8	248.9	415941.1	4.61	9.27	
68-3178	OZ	127	125.1	0.875	43	48.2	51.3	54.5	2792.9	14.59	29.37	A2
		6825.3	3177.6	22.225	1117	235.1	250.5	265.9	381398.8	4.45	8.95	
68-3318	OZ	127	130.61	0.938	43	48.7	51.7	54.7	2794	14.55	29.3	A1
		6827.9	3317.6	23.812	1117	237.7	252.4	267.1	381544.5	4.44	8.93	
68-3752	OZ	127	147.72	0.75	52	42	44.9	47.7	3302.4	15.6	31.4	B1
		6828.7	3752.2	19.05	1320	205	219.1	233.1	450968	4.75	9.57	
68-2961	OZ	127.1	116.59	0.625	50	42.1	44.8	47.5	3178.2	12.65	25.29	B3
		6834.9	2961.4	15.875	1270	205.4	218.5	231.7	434017.4	3.85	7.71	
68-3470	OZ	127.2	136.61	0.75	50	43.3	46.2	49.1	3178.9	15.34	30.87	A1
		6836.3	3470	19.05	1270	211.5	225.6	239.7	434107.2	4.67	9.41	
69-3815	OZ	127.6	150.21	0.562	60	37	39.9	42.7	3829.3	16.68	33.56	B2
		6862.6	3815.4	14.288	1524	180.9	194.7	208.5	522931.5	5.08	10.23	
69-3432	OZ	127.9	135.1	0.625	53	40.4	43.4	46.3	3452.8	15.89	31.98	A2
		6875.3	3431.6	15.875	1371	197.4	211.7	226	471506.8	4.84	9.75	
69-2657	OZ	128.2	104.59	1	38	54.4	57.4	60.4	2436.6	11.08	22.15	B3
		6894.7	2656.6	25.4	965	265.7	280.4	295.1	332739.7	3.38	6.75	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
69-3622	OZ	128.3	142.61	0.625	56	39.4	42.2	44.9	3591.2	16.12	32.44	A1
		6895.5	3622.4	15.875	1422	192.4	205.9	219.3	490407.5	4.91	9.89	
69-3419	OZ	128.3	134.61	0.812	48	45.3	48.2	51.2	3078.4	15.08	30.35	A1
		6896	3419.2	20.638	1219	221.2	235.5	249.7	420382.5	4.6	9.25	
69-3701	OZ	128.4	145.72	0.812	50	43.9	46.8	49.7	3209.9	15.34	30.87	B1
		6902.9	3701.4	20.638	1270	214.4	228.6	242.8	438334.7	4.67	9.41	
69-3651	OZ	128.6	143.72	0.875	48	45.7	48.6	51.6	3086.8	15.08	30.35	B1
		6914.9	3650.6	22.225	1219	222.9	237.3	251.7	421534	4.6	9.25	
69-3063	OZ	129.1	120.59	0.562	53	39.8	42.4	45	3487	13.17	26.34	B3
		6943.5	3063	14.288	1371	194.4	207.1	219.9	476186.5	4.01	8.03	
70-3724	OZ	129.3	146.61	0.562	60	37.3	40	42.7	3878.4	16.65	33.49	A1
		6950.6	3724	14.288	1524	182.1	195.2	208.3	529635.3	5.07	10.21	
70-2374	OZ	129.7	93.48	1	36	57.2	60.2	63.2	2334	10.81	21.63	A3
		6971.3	2374.4	25.4	914	279.1	293.9	308.8	318728.5	3.3	6.59	
70-2374	OZ	129.7	93.48	1	36	57.2	60.2	63.2	2334	10.81	21.63	A3
		6971.3	2374.4	25.4	914	279.1	293.9	308.8	318728.6	3.3	6.59	
70-2679	OZ	130	105.48	0.625	48	44.1	46.8	49.5	3120.9	12.39	24.77	A3
		6991.2	2679.2	15.875	1219	215.3	228.5	241.6	426182.9	3.78	7.55	
70-2911	OZ	130.6	114.59	0.688	48	44.7	47.4	50.2	3134.3	12.39	24.77	B3
		7021.3	2910.6	17.462	1219	218.1	231.5	244.9	428018	3.78	7.55	
70-3663	OZ	130.9	144.21	0.688	53	41.5	44.4	47.4	3533.4	15.89	31.98	B2
		7035.8	3663	17.462	1371	202.4	216.8	231.2	482512.3	4.84	9.75	
70-2707	OZ	131.1	106.59	0.938	40	52.9	55.9	58.9	2621.7	11.34	22.68	B3
		7047.6	2707.4	23.812	1016	258.5	272.9	287.3	358020.3	3.46	6.91	
71-2882	OZ	131.8	113.48	0.5	56	38.9	41.4	43.9	3690.6	13.43	26.87	A3
		7086.4	2882.4	12.7	1422	189.9	202.1	214.3	503982.5	4.09	8.19	
71-3381	OZ	131.9	133.1	0.688	52	42.9	45.9	48.8	3428.6	15.63	31.46	A2
		7089.7	3380.8	17.462	1320	209.4	223.9	238.4	468200.6	4.76	9.59	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
71-3854	OZ	131.9	151.72	0.688	56	40.5	43.3	46.1	3693	16.12	32.44	B1
		7091.1	3853.8	17.462	1422	197.9	211.6	225.2	504315.7	4.91	9.89	
71-2781	OZ	132.4	109.48	0.562	52	41.7	44.3	46.9	3441.4	12.91	25.82	A3
		7116.2	2780.8	14.288	1320	203.6	216.2	228.9	469954.4	3.93	7.87	
71-3572	OZ	132.5	140.61	0.688	53	41.8	44.6	47.4	3577	15.86	31.92	A1
		7122.6	3571.6	17.462	1371	204.3	217.9	231.6	488467.9	4.83	9.73	
71-2758	OZ	132.8	108.59	0.875	42	51.2	54.1	57	2789.3	11.6	23.2	B3
		7141.2	2758.2	22.225	1066	250.1	264.2	278.4	380909.4	3.54	7.07	
71-2425	OZ	132.9	95.48	0.938	38	55.6	58.6	61.6	2524.4	11.08	22.15	A3
		7143.2	2425.2	23.812	965	271.6	286.1	300.6	344732.1	3.38	6.75	
71-3127	OZ	132.9	123.1	1	42	52.3	55.5	58.8	2790.7	14.32	28.84	A2
		7144.6	3126.8	25.4	1066	255.6	271.2	286.9	381093.2	4.37	8.79	
71-3127	OZ	132.9	123.1	1	42	52.3	55.5	58.8	2790.7	14.32	28.84	A2
		7144.6	3126.8	25.4	1066	255.6	271.2	286.9	381093.4	4.37	8.79	
72-3409	OZ	133.2	134.21	1	43	50.6	53.8	56.9	2931.4	14.59	29.37	B2
		7163.8	3409	25.4	1117	247.1	262.6	278	400311.7	4.45	8.95	
72-2809	OZ	133.4	110.59	0.812	43	49.3	52.1	54.9	2934.2	11.86	23.72	B3
		7170.7	2809	20.638	1117	240.5	254.4	268.3	400697.5	3.62	7.23	
72-3612	OZ	133.7	142.21	0.75	52	43.6	46.6	49.6	3476.6	15.63	31.46	B2
		7189.1	3612.2	19.05	1320	213.1	227.7	242.3	474766.8	4.76	9.59	
72-3330	OZ	134.5	131.1	0.75	50	45.2	48.2	51.2	3362.8	15.37	30.94	A2
		7231.7	3330	19.05	1270	220.6	235.3	249.9	459214	4.68	9.43	
72-3955	OZ	134.5	155.72	0.625	60	38.7	41.5	44.2	4036.3	16.65	33.49	B1
		7233.5	3955.4	15.875	1524	189.2	202.5	215.8	551191.3	5.07	10.21	
72-3318	OZ	134.6	130.61	1	43	51.3	54.3	57.3	2961.8	14.55	29.3	A1
		7238	3317.6	25.4	1117	250.3	265	279.7	404458.6	4.44	8.93	
72-3012	OZ	134.7	118.59	0.625	52	42.7	45.4	48	3502.8	12.91	25.82	B3
		7243.3	3012.2	15.875	1320	208.5	221.5	234.4	478344.5	3.93	7.87	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
73-3215	OZ	134.9	126.59	0.5	60	37.6	40.1	42.6	4047.2	13.96	27.91	B3
		7252.9	3215.4	12.7	1524	183.6	195.8	207.9	552674.4	4.25	8.51	
73-2476	OZ	134.9	97.48	0.875	40	53.8	56.7	59.6	2698.5	11.34	22.68	A3
		7254	2476	22.225	1016	262.7	276.9	291.2	368502.9	3.46	6.91	
73-3178	OZ	135	125.1	0.938	43	50.9	54	57.2	2969.7	14.59	29.37	A2
		7257.3	3177.6	23.812	1117	248.3	263.7	279.1	405539.6	4.45	8.95	
73-3803	OZ	135	149.72	0.75	53	42.7	45.6	48.4	3645	15.86	31.92	B1
		7258	3803	19.05	1371	208.6	222.4	236.2	497754.9	4.83	9.73	
73-3482	OZ	135.1	137.1	0.625	56	41	43.9	46.8	3783.6	16.16	32.51	A2
		7264.9	3482.4	15.875	1422	200.3	214.3	228.4	516678.9	4.92	9.91	
73-2578	OZ	135.3	101.48	0.75	43	49.4	52.2	55	2975.9	11.86	23.72	A3
		7272.4	2577.6	19.05	1117	241.2	254.9	268.6	406380	3.62	7.23	
73-3561	OZ	135.3	140.21	0.812	50	45.7	48.7	51.7	3383	15.37	30.94	B2
		7275.2	3561.4	20.638	1270	223	237.8	252.6	461976.4	4.68	9.43	
73-3521	OZ	135.4	138.61	0.75	52	44.1	46.9	49.8	3519.4	15.6	31.4	A1
		7277.5	3520.8	19.05	1320	215.3	229.1	243	480607.2	4.75	9.57	
73-3511	OZ	135.7	138.21	0.875	48	47.5	50.6	53.7	3257.6	15.11	30.41	B2
		7297.4	3510.6	22.225	1219	231.9	247	262	444847.8	4.61	9.27	
73-2527	OZ	135.8	99.48	0.812	42	51.7	54.6	57.4	2850.8	11.6	23.2	A3
		7298.6	2526.8	20.638	1066	252.6	266.5	280.5	389305.9	3.54	7.07	
73-3279	OZ	135.9	129.1	0.812	48	47.3	50.3	53.4	3260.8	15.11	30.41	A2
		7304.7	3279.2	20.638	1219	230.8	245.7	260.6	445292.4	4.61	9.27	
73-3584	OZ	135.9	141.1	0.562	60	38.8	41.6	44.4	4076.6	16.68	33.56	A2
		7305.7	3584	14.288	1524	189.4	203	216.7	556694.4	5.08	10.23	
73-3114	OZ	136.2	122.59	0.562	56	40.3	42.9	45.5	3814.7	13.43	26.87	B3
		7324.6	3113.8	14.288	1422	197	209.5	222.1	520925.9	4.09	8.19	
74-3752	OZ	136.9	147.72	0.812	52	44.7	47.6	50.5	3558.2	15.6	31.4	B1
		7357.7	3752.2	20.638	1320	218.4	232.4	246.4	485902.1	4.75	9.57	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
74-3470	OZ	137	136.61	0.812	50	46.2	49	51.9	3423.9	15.34	30.87	A1
		7363.2	3470	20.638	1270	225.4	239.5	253.5	467565.4	4.67	9.41	
74-3651	OZ	137	143.72	0.938	48	48.2	51.2	54.1	3288.7	15.08	30.35	B1
		7367.2	3650.6	23.812	1219	235.5	249.9	264.3	449107.5	4.6	9.25	
74-3419	OZ	137.3	134.61	0.875	48	48.1	51	53.9	3295.7	15.08	30.35	A1
		7382.9	3419.2	22.225	1219	234.7	248.9	263.2	450062	4.6	9.25	
74-3701	OZ	137.5	145.72	0.875	50	46.6	49.5	52.4	3437.8	15.34	30.87	B1
		7393	3701.4	22.225	1270	227.4	241.6	255.8	469458	4.67	9.41	
74-2730	OZ	137.9	107.48	0.625	50	44.8	47.4	50.1	3447.6	12.65	25.29	A3
		7414.3	2730	15.875	1270	218.6	231.5	244.4	470805.6	3.85	7.71	
74-3714	OZ	138.5	146.21	0.688	56	42.1	45	47.9	3877.3	16.16	32.51	B2
		7444.8	3713.8	17.462	1422	205.5	219.7	233.9	529474.6	4.92	9.91	
75-2707	OZ	138.7	106.59	1	40	55.8	58.8	61.7	2774.1	11.34	22.68	B3
		7457.2	2707.4	25.4	1016	272.5	286.9	301.3	378827.4	3.46	6.91	
75-2707	OZ	138.7	106.59	1	40	55.8	58.8	61.7	2774.1	11.34	22.68	B3
		7457.2	2707.4	25.4	1016	272.5	286.9	301.3	378827.5	3.46	6.91	
75-2961	OZ	138.8	116.59	0.688	50	45.4	48.1	50.8	3469.8	12.65	25.29	B3
		7461.9	2961.4	17.462	1270	221.7	234.9	248.1	473829.7	3.85	7.71	
75-3432	OZ	139.7	135.1	0.688	53	43.6	46.5	49.4	3771.6	15.89	31.98	A2
		7510.2	3431.6	17.462	1371	212.7	227	241.2	515049.2	4.84	9.75	
75-2832	OZ	139.7	111.48	0.562	53	42.2	44.8	47.3	3772	13.17	26.34	A3
		7510.9	2831.6	14.288	1371	206.2	218.7	231.1	515100.7	4.01	8.03	
75-3622	OZ	140.3	142.61	0.688	56	42.5	45.2	48	3928.9	16.12	32.44	A1
		7544	3622.4	17.462	1422	207.4	220.9	234.4	536531.6	4.91	9.89	
76-2425	OZ	140.5	95.48	1	38	58.6	61.6	64.6	2669.1	11.08	22.15	A3
		7552.6	2425.2	25.4	965	286.3	300.9	315.4	364488	3.38	6.75	
76-3815	OZ	140.9	150.21	0.625	60	40.2	43	45.8	4228.2	16.68	33.56	B2
		7577.4	3815.4	15.875	1524	196.2	210	223.9	577400.2	5.08	10.23	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
76-2758	OZ	141.2	108.59	0.938	42	54.2	57.1	60	2965.4	11.6	23.2	B3
		7591.8	2758.2	23.812	1066	264.5	278.7	292.9	404948.6	3.54	7.07	
76-2911	OZ	141.4	114.59	0.75	48	47.9	50.7	53.4	3393.8	12.39	24.77	B3
		7602.5	2910.6	19.05	1219	234	247.4	260.8	463450.6	3.78	7.55	
76-3663	OZ	141.8	144.21	0.75	53	44.4	47.3	50.3	3829.9	15.89	31.98	B2
		7626.3	3663	19.05	1371	216.7	231.1	245.5	523011.9	4.84	9.75	
76-2679	OZ	141.9	105.48	0.688	48	47.6	50.3	53	3405	12.39	24.77	A3
		7627.7	2679.2	17.462	1219	232.6	245.8	258.9	464985.5	3.78	7.55	
77-3063	OZ	142.5	120.59	0.625	53	43.3	45.9	48.5	3846.8	13.17	26.34	B3
		7659.9	3063	15.875	1371	211.5	224.3	237	525314.8	4.01	8.03	
77-2809	OZ	142.5	110.59	0.875	43	52.3	55.2	58	3136	11.86	23.72	B3
		7663.7	2809	22.225	1117	255.4	269.3	283.3	428248.2	3.62	7.23	
77-3381	OZ	142.9	133.1	0.75	52	45.9	48.9	51.9	3714.6	15.63	31.46	A2
		7681.1	3380.8	19.05	1320	224.3	238.8	253.2	507262.4	4.76	9.59	
77-3724	OZ	142.9	146.61	0.625	60	40.5	43.2	45.9	4287.1	16.65	33.49	A1
		7683	3724	15.875	1524	197.8	210.9	224	585440.9	5.07	10.21	
77-3178	OZ	142.9	125.1	1	43	53.6	56.7	59.9	3144.9	14.59	29.37	A2
		7685.5	3177.6	25.4	1117	261.5	276.9	292.3	429463.3	4.45	8.95	
77-3854	OZ	143.2	151.72	0.75	56	43.4	46.2	49	4008.4	16.12	32.44	B1
		7696.5	3853.8	19.05	1422	212	225.7	239.3	547377.1	4.91	9.89	
77-2476	OZ	143.3	97.48	0.938	40	56.9	59.9	62.8	2866.7	11.34	22.68	A3
		7706.3	2476	23.812	1016	278	292.3	306.5	391479.9	3.46	6.91	
77-3572	OZ	143.7	140.61	0.75	53	44.8	47.6	50.4	3881.1	15.86	31.92	A1
		7728.3	3571.6	19.05	1371	218.9	232.5	246.2	530003.9	4.83	9.73	
77-3612	OZ	143.9	142.21	0.812	52	46.5	49.5	52.5	3742.4	15.63	31.46	B2
		7738.6	3612.2	20.638	1320	227	241.6	256.2	511055	4.76	9.59	
78-3511	OZ	144.5	138.21	0.938	48	50.2	53.3	56.3	3467.5	15.11	30.41	B2
		7767.7	3510.6	23.812	1219	245	260	275.1	473521	4.61	9.27	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
78-3330	OZ	144.7	131.1	0.812	50	48.1	51.1	54.2	3618.1	15.37	30.94	A2
		7780.8	3330	20.638	1270	235	249.7	264.4	494078.9	4.68	9.43	
78-3561	OZ	144.8	140.21	0.875	50	48.4	51.5	54.5	3619.9	15.37	30.94	B2
		7784.6	3561.4	22.225	1270	236.5	251.3	266.1	494323.2	4.68	9.43	
78-2527	OZ	145	99.48	0.875	42	55	57.8	60.7	3044.8	11.6	23.2	A3
		7795.1	2526.8	22.225	1066	268.4	282.4	296.3	415792.4	3.54	7.07	
78-3279	OZ	145.3	129.1	0.875	48	50.1	53.2	56.3	3487.4	15.11	30.41	A2
		7812.3	3279.2	22.225	1219	244.8	259.7	274.7	476238.9	4.61	9.27	
78-2578	OZ	145.3	101.48	0.812	43	52.8	55.6	58.4	3197.7	11.86	23.72	A3
		7814.4	2577.6	20.638	1117	257.6	271.3	285	436669.5	3.62	7.23	
78-2984	OZ	145.4	117.48	0.5	60	39.7	42.2	44.6	4361	13.96	27.91	A3
		7815.4	2984	12.7	1524	194.1	205.9	217.7	595532.6	4.25	8.51	
78-3651	OZ	145.4	143.72	1	48	50.8	53.8	56.7	3489	15.08	30.35	B1
		7815.9	3650.6	25.4	1219	248.1	262.5	276.9	476456.5	4.6	9.25	
78-3651	OZ	145.4	143.72	1	48	50.8	53.8	56.7	3489	15.08	30.35	B1
		7815.9	3650.6	25.4	1219	248.1	262.5	276.9	476457.4	4.6	9.25	
78-3803	OZ	145.5	149.72	0.812	53	45.5	48.4	51.2	3928.6	15.86	31.92	B1
		7822.8	3803	20.638	1371	222.3	236.1	249.9	536487.5	4.83	9.73	
78-3521	OZ	145.8	138.61	0.812	52	47	49.8	52.7	3792	15.6	31.4	A1
		7841.3	3520.8	20.638	1320	229.5	243.4	257.2	517837.4	4.75	9.57	
78-2781	OZ	145.9	109.48	0.625	52	45.4	48	50.6	3794.3	12.91	25.82	A3
		7846	2780.8	15.875	1320	221.7	234.4	247.1	518149.2	3.93	7.87	
79-3419	OZ	146.3	134.61	0.938	48	50.8	53.7	56.7	3511.3	15.08	30.35	A1
		7865.8	3419.2	23.812	1219	248.1	262.4	276.6	479501.6	4.6	9.25	
79-3701	OZ	146.6	145.72	0.938	50	49.2	52.1	55	3663.9	15.34	30.87	B1
		7879.4	3701.4	23.812	1270	240.3	254.6	268.8	500340.9	4.67	9.41	
79-3752	OZ	146.6	147.72	0.875	52	47.5	50.3	53.2	3812.1	15.6	31.4	B1
		7882.7	3752.2	22.225	1320	231.7	245.8	259.8	520575.1	4.75	9.57	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
79-3470	OZ	146.7	136.61	0.875	50	49	51.9	54.8	3667	15.34	30.87	A1
		7886.1	3470	22.225	1270	239.3	253.3	267.4	500764.3	4.67	9.41	
79-3012	OZ	147.2	118.59	0.688	52	46.1	48.8	51.4	3826.3	12.91	25.82	B3
		7912	3012.2	17.462	1320	225.2	238.2	251.2	522511.5	3.93	7.87	
79-2882	OZ	147.2	113.48	0.562	56	42.8	45.3	47.8	4120.9	13.43	26.87	A3
		7912.6	2882.4	14.288	1422	208.8	221	233.3	562746	4.09	8.19	
79-3955	OZ	147.3	155.72	0.688	60	41.8	44.5	47.2	4418.6	16.65	33.49	B1
		7918.6	3955.4	17.462	1524	203.9	217.2	230.5	603398.4	5.07	10.21	
79-3482	OZ	147.7	137.1	0.688	56	44.2	47.1	50	4134.9	16.16	32.51	A2
		7939.5	3482.4	17.462	1422	215.9	229.9	244	564657.3	4.92	9.91	
80-2758	OZ	149.5	108.59	1	42	57.1	60	62.9	3139.8	11.6	23.2	B3
		8038.3	2758.2	25.4	1066	279	293.1	307.3	428764.6	3.54	7.07	
80-2758	OZ	149.5	108.59	1	42	57.1	60	62.9	3139.8	11.6	23.2	B3
		8038.3	2758.2	25.4	1066	279	293.1	307.3	428764.8	3.54	7.07	
81-3584	OZ	150	141.1	0.625	60	42.1	44.9	47.7	4501.2	16.68	33.56	A2
		8066.7	3584	15.875	1524	205.7	219.3	233	614679.9	5.08	10.23	
81-3714	OZ	150.2	146.21	0.75	56	45.1	48	50.9	4204.5	16.16	32.51	B2
		8073.1	3713.8	19.05	1422	220.1	234.3	248.5	574159.3	4.92	9.91	
81-2961	OZ	150.4	116.59	0.75	50	48.7	51.5	54.2	3759.1	12.65	25.29	B3
		8084.1	2961.4	19.05	1270	238	251.2	264.4	513338	3.85	7.71	
81-3114	OZ	150.4	122.59	0.625	56	43.9	46.5	49.1	4210.3	13.43	26.87	B3
		8084.3	3113.8	15.875	1422	214.5	227	239.6	574956.4	4.09	8.19	
81-2730	OZ	150.6	107.48	0.688	50	48.4	51	53.7	3763.9	12.65	25.29	A3
		8094.4	2730	17.462	1270	236.3	249.2	262.1	513992.4	3.85	7.71	
81-3215	OZ	150.8	126.59	0.562	60	41.3	43.8	46.3	4523.5	13.96	27.91	B3
		8106.5	3215.4	14.288	1524	201.9	214	226.2	617717.6	4.25	8.51	
81-3432	OZ	151.4	135.1	0.75	53	46.7	49.6	52.5	4088.2	15.89	31.98	A2
		8140.6	3431.6	19.05	1371	227.9	242.2	256.5	558279.7	4.84	9.75	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
82-2809	OZ	151.6	110.59	0.938	43	55.4	58.2	61.1	3336	11.86	23.72	B3
		8152.4	2809	23.812	1117	270.4	284.3	298.2	455556.9	3.62	7.23	
82-2476	OZ	151.7	97.48	1	40	60.1	63	65.9	3033.4	11.34	22.68	A3
		8154.2	2476	25.4	1016	293.3	307.6	321.8	414231.5	3.46	6.91	
82-2476	OZ	151.7	97.48	1	40	60.1	63	65.9	3033.4	11.34	22.68	A3
		8154.2	2476	25.4	1016	293.3	307.6	321.8	414231.7	3.46	6.91	
82-2911	OZ	152.1	114.59	0.812	48	51.2	53.9	56.7	3651.2	12.39	24.77	B3
		8179.1	2910.6	20.638	1219	249.8	263.3	276.7	498598	3.78	7.55	
82-3622	OZ	152.3	142.61	0.75	56	45.6	48.3	51.1	4264.4	16.12	32.44	A1
		8188.2	3622.4	19.05	1422	222.4	235.9	249.3	582343.7	4.91	9.89	
82-3663	OZ	152.8	144.21	0.812	53	47.3	50.2	53.2	4124.4	15.89	31.98	B2
		8212.7	3663	20.638	1371	230.9	245.3	259.7	563224.9	4.84	9.75	
82-3511	OZ	153.2	138.21	1	48	52.9	55.9	59	3675.8	15.11	30.41	B2
		8234.3	3510.6	25.4	1219	258.1	273.1	288.1	501960.6	4.61	9.27	
82-3511	OZ	153.2	138.21	1	48	52.9	55.9	59	3675.8	15.11	30.41	B2
		8234.3	3510.6	25.4	1219	258.1	273.1	288.1	501961.6	4.61	9.27	
83-2679	OZ	153.6	105.48	0.75	48	51.2	53.9	56.6	3686.9	12.39	24.77	A3
		8259.2	2679.2	19.05	1219	249.9	263.1	276.2	503478.4	3.78	7.55	
83-3381	OZ	153.8	133.1	0.812	52	49	51.9	54.9	3998.5	15.63	31.46	A2
		8268.2	3380.8	20.638	1320	239.1	253.6	268.1	546034.3	4.76	9.59	
83-3612	OZ	154.1	142.21	0.875	52	49.3	52.3	55.3	4006.1	15.63	31.46	B2
		8283.9	3612.2	22.225	1320	240.8	255.4	270	547071.8	4.76	9.59	
83-2832	OZ	154.1	111.48	0.625	53	46	48.6	51.1	4161.2	13.17	26.34	A3
		8285.9	2831.6	15.875	1371	224.8	237.2	249.7	568243.8	4.01	8.03	
83-2527	OZ	154.1	99.48	0.938	42	58.2	61.1	63.9	3236.9	11.6	23.2	A3
		8287.1	2526.8	23.812	1066	284.2	298.2	312.1	442033.1	3.54	7.07	
83-3815	OZ	154.2	150.21	0.688	60	43.3	46.2	49	4624.5	16.68	33.56	B2
		8287.7	3815.4	17.462	1524	211.5	225.3	239.2	631523	5.08	10.23	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
83-3561	OZ	154.2	140.21	0.938	50	51.2	54.2	57.3	3854.9	15.37	30.94	B2
		8290.1	3561.4	23.812	1270	249.9	264.7	279.5	526420.1	4.68	9.43	
83-3854	OZ	154.3	151.72	0.812	56	46.3	49.1	51.9	4321.5	16.12	32.44	B1
		8297.8	3853.8	20.638	1422	226.1	239.7	253.4	590140.1	4.91	9.89	
83-3279	OZ	154.7	129.1	0.938	48	53	56.1	59.1	3712.2	15.11	30.41	A2
		8315.9	3279.2	23.812	1219	258.8	273.8	288.7	506935.4	4.61	9.27	
83-3330	OZ	154.9	131.1	0.875	50	51.1	54.1	57.1	3871.4	15.37	30.94	A2
		8325.6	3330	22.225	1270	249.5	264.1	278.8	528673.5	4.68	9.43	
83-3572	OZ	154.9	140.61	0.812	53	47.8	50.6	53.4	4183.1	15.86	31.92	A1
		8329.6	3571.6	20.638	1371	233.5	247.1	260.8	571245.9	4.83	9.73	
83-3419	OZ	155.2	134.61	1	48	53.6	56.5	59.4	3725.1	15.08	30.35	A1
		8344.8	3419.2	25.4	1219	261.5	275.8	290	508701.4	4.6	9.25	
83-3419	OZ	155.2	134.61	1	48	53.6	56.5	59.4	3725.2	15.08	30.35	A1
		8344.9	3419.2	25.4	1219	261.5	275.8	290	508702.5	4.6	9.25	
84-2578	OZ	155.3	101.48	0.875	43	56.1	58.9	61.7	3417.5	11.86	23.72	A3
		8351.7	2577.6	22.225	1117	273.9	287.6	301.3	466693.5	3.62	7.23	
84-3701	OZ	155.5	145.72	1	50	51.9	54.8	57.7	3888.3	15.34	30.87	B1
		8361.9	3701.4	25.4	1270	253.3	267.5	281.7	530982.7	4.67	9.41	
84-3701	OZ	155.5	145.72	1	50	51.9	54.8	57.7	3888.3	15.34	30.87	B1
		8361.9	3701.4	25.4	1270	253.3	267.5	281.7	530983.4	4.67	9.41	
84-3063	OZ	155.7	120.59	0.688	53	46.8	49.4	52.1	4204	13.17	26.34	B3
		8371.2	3063	17.462	1371	228.6	241.4	254.1	574097	4.01	8.03	
84-3803	OZ	155.9	149.72	0.875	53	48.3	51.2	54	4210.2	15.86	31.92	B1
		8383.6	3803	22.225	1371	236	249.8	263.6	574944	4.83	9.73	
84-3521	OZ	156.3	138.61	0.875	52	49.9	52.8	55.6	4062.6	15.6	31.4	A1
		8400.8	3520.8	22.225	1320	243.7	257.6	271.4	554789.2	4.75	9.57	
84-3752	OZ	156.3	147.72	0.938	52	50.2	53.1	55.9	4064.1	15.6	31.4	B1
		8403.9	3752.2	23.812	1320	245	259.1	273.1	554994.9	4.75	9.57	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
84-3470	OZ	156.3	136.61	0.938	50	51.8	54.7	57.6	3908.3	15.34	30.87	A1
		8404.8	3470	23.812	1270	253.1	267.1	281.2	533706.6	4.67	9.41	
84-3724	OZ	156.4	146.61	0.688	60	43.7	46.4	49.1	4693.2	16.65	33.49	A1
		8410.7	3724	17.462	1524	213.5	226.6	239.7	640892	5.07	10.21	
86-2781	OZ	159.4	109.48	0.688	52	49.1	51.7	54.3	4144.7	12.91	25.82	A3
		8570.4	2780.8	17.462	1320	239.9	252.5	265.2	565991.5	3.93	7.87	
86-3012	OZ	159.5	118.59	0.75	52	49.6	52.2	54.9	4147.3	12.91	25.82	B3
		8575.9	3012.2	19.05	1320	241.9	254.9	267.9	566353.2	3.93	7.87	
86-3955	OZ	159.9	155.72	0.75	60	44.8	47.5	50.2	4798.5	16.65	33.49	B1
		8599.4	3955.4	19.05	1524	218.6	231.9	245.2	655271.8	5.07	10.21	
86-3482	OZ	160.1	137.1	0.75	56	47.4	50.3	53.2	4483.9	16.16	32.51	A2
		8609.6	3482.4	19.05	1422	231.5	245.5	259.6	612311.3	4.92	9.91	
86-2809	OZ	160.6	110.59	1	43	58.4	61.3	64.1	3534.2	11.86	23.72	B3
		8636.7	2809	25.4	1117	285.3	299.2	313.1	482619.9	3.62	7.23	
87-3714	OZ	161.8	146.21	0.812	56	48.1	51	53.9	4529.4	16.16	32.51	B2
		8697.1	3713.8	20.638	1422	234.7	248.9	263.1	618534.3	4.92	9.91	
87-2961	OZ	161.8	116.59	0.812	50	52.1	54.8	57.5	4046.2	12.65	25.29	B3
		8701.5	2961.4	20.638	1270	254.3	267.5	280.7	552542.4	3.85	7.71	
87-2882	OZ	162.4	113.48	0.625	56	46.6	49.1	51.7	4548.3	13.43	26.87	A3
		8733.3	2882.4	15.875	1422	227.7	240	252.2	621114.1	4.09	8.19	
87-2984	OZ	162.5	117.48	0.562	60	43.8	46.2	48.6	4874.2	13.96	27.91	A3
		8735.2	2984	14.288	1524	213.7	225.5	237.3	665619.7	4.25	8.51	
88-2911	OZ	162.8	114.59	0.875	48	54.4	57.2	59.9	3906.5	12.39	24.77	B3
		8751	2910.6	22.225	1219	265.7	279.1	292.5	533463.6	3.78	7.55	
88-3432	OZ	163.1	135.1	0.812	53	49.8	52.7	55.6	4402.5	15.89	31.98	A2
		8766.5	3431.6	20.638	1371	243.1	257.4	271.6	601204.3	4.84	9.75	
88-2730	OZ	163.1	107.48	0.75	50	52	54.7	57.3	4077.7	12.65	25.29	A3
		8769.3	2730	19.05	1270	254	266.9	279.8	556849.5	3.85	7.71	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
88-2527	OZ	163.2	99.48	1	42	61.4	64.3	67.2	3427.3	11.6	23.2	A3
		8774.5	2526.8	25.4	1066	300	314	327.9	468030.2	3.54	7.07	
88-2527	OZ	163.2	99.48	1	42	61.4	64.3	67.2	3427.3	11.6	23.2	A3
		8774.5	2526.8	25.4	1066	300	314	327.9	468030.4	3.54	7.07	
88-3561	OZ	163.5	140.21	1	50	53.9	57	60	4088.1	15.37	30.94	B2
		8791.6	3561.4	25.4	1270	263.3	278.1	292.9	558266.4	4.68	9.43	
88-3561	OZ	163.5	140.21	1	50	53.9	57	60	4088.1	15.37	30.94	B2
		8791.6	3561.4	25.4	1270	263.3	278.1	292.9	558267.2	4.68	9.43	
88-3663	OZ	163.6	144.21	0.875	53	50.2	53.1	56.1	4416.8	15.89	31.98	B2
		8794.9	3663	22.225	1371	245.1	259.5	273.9	603151.2	4.84	9.75	
88-3279	OZ	164	129.1	1	48	55.9	58.9	62	3935.2	15.11	30.41	A2
		8815.3	3279.2	25.4	1219	272.8	287.7	302.6	537381.9	4.61	9.27	
88-3279	OZ	164	129.1	1	48	55.9	58.9	62	3935.2	15.11	30.41	A2
		8815.3	3279.2	25.4	1219	272.8	287.7	302.6	537383	4.61	9.27	
88-3584	OZ	164.1	141.1	0.688	60	45.5	48.3	51.1	4923.1	16.68	33.56	A2
		8822.8	3584	17.462	1524	222	235.6	249.3	672297.1	5.08	10.23	
88-3612	OZ	164.2	142.21	0.938	52	52.2	55.1	58.1	4267.9	15.63	31.46	B2
		8825.3	3612.2	23.812	1320	254.7	269.3	283.9	582825.6	4.76	9.59	
88-3622	OZ	164.2	142.61	0.812	56	48.6	51.4	54.1	4597.6	16.12	32.44	A1
		8827.9	3622.4	20.638	1422	237.3	250.8	264.3	627838.4	4.91	9.89	
88-3114	OZ	164.4	122.59	0.688	56	47.5	50.1	52.6	4603.2	13.43	26.87	B3
		8838.8	3113.8	17.462	1422	231.9	244.5	257	628614.3	4.09	8.19	
89-3381	OZ	164.6	133.1	0.875	52	52	55	57.9	4280.3	15.63	31.46	A2
		8850.9	3380.8	22.225	1320	253.9	268.4	282.9	584516.3	4.76	9.59	
89-3330	OZ	164.9	131.1	0.938	50	54	57	60.1	4122.8	15.37	30.94	A2
		8866.2	3330	23.812	1270	263.8	278.5	293.2	563000.8	4.68	9.43	
89-2578	OZ	165.2	101.48	0.938	43	59.4	62.2	65	3635.5	11.86	23.72	A3
		8884.3	2577.6	23.812	1117	290.2	303.9	317.6	496453.8	3.62	7.23	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
89-2679	OZ	165.3	105.48	0.812	48	54.7	57.4	60.1	3966.5	12.39	24.77	A3
		8885.5	2679.2	20.638	1219	267.1	280.3	293.5	541661.4	3.78	7.55	
89-3854	OZ	165.4	151.72	0.875	56	49.2	52	54.8	4632.5	16.12	32.44	B1
		8895	3853.8	22.225	1422	240.1	253.7	267.4	632609.9	4.91	9.89	
89-3470	OZ	165.9	136.61	1	50	54.7	57.5	60.4	4147.6	15.34	30.87	A1
		8919.6	3470	25.4	1270	266.8	280.9	295	566391.7	4.67	9.41	
89-3470	OZ	165.9	136.61	1	50	54.7	57.5	60.4	4147.6	15.34	30.87	A1
		8919.6	3470	25.4	1270	266.8	280.9	295	566392.5	4.67	9.41	
89-3752	OZ	165.9	147.72	1	52	52.9	55.8	58.6	4314.3	15.6	31.4	B1
		8921.2	3752.2	25.4	1320	258.3	272.3	286.3	589153.6	4.75	9.57	
89-3752	OZ	165.9	147.72	1	52	52.9	55.8	58.6	4314.3	15.6	31.4	B1
		8921.2	3752.2	25.4	1320	258.3	272.3	286.3	589154.4	4.75	9.57	
89-3572	OZ	166	140.61	0.875	53	50.8	53.6	56.4	4483	15.86	31.92	A1
		8926.7	3571.6	22.225	1371	248.1	261.7	275.4	612194	4.83	9.73	
89-3803	OZ	166.3	149.72	0.938	53	51.1	54	56.8	4489.8	15.86	31.92	B1
		8940.3	3803	23.812	1371	249.6	263.4	277.3	613124.4	4.83	9.73	
90-3215	OZ	166.6	126.59	0.625	60	45.1	47.6	50	4996.7	13.96	27.91	B3
		8954.7	3215.4	15.875	1524	220.1	232.2	244.4	682350.3	4.25	8.51	
90-3521	OZ	166.6	138.61	0.938	52	52.8	55.7	58.5	4331.3	15.6	31.4	A1
		8956.3	3520.8	23.812	1320	257.9	271.8	285.6	591471.2	4.75	9.57	
90-3815	OZ	167.3	150.21	0.75	60	46.4	49.3	52.1	5018.3	16.68	33.56	B2
		8993.4	3815.4	19.05	1524	226.8	240.6	254.4	685299.8	5.08	10.23	
91-2832	OZ	168.4	111.48	0.688	53	49.8	52.4	54.9	4547.6	13.17	26.34	A3
		9055.3	2831.6	17.462	1371	243.3	255.7	268.2	621012.6	4.01	8.03	
91-3063	OZ	168.8	120.59	0.75	53	50.3	52.9	55.5	4558.7	13.17	26.34	B3
		9077.4	3063	19.05	1371	245.7	258.5	271.2	622529.9	4.01	8.03	
91-3724	OZ	169.9	146.61	0.75	60	46.9	49.6	52.3	5096.6	16.65	33.49	A1
		9133.7	3724	19.05	1524	229.2	242.3	255.4	695988.7	5.07	10.21	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
92-3012	OZ	171.8	118.59	0.812	52	53	55.6	58.3	4466	12.91	25.82	B3
		9234.9	3012.2	20.638	1320	258.6	271.5	284.5	609869.6	3.93	7.87	
93-3482	OZ	172.5	137.1	0.812	56	50.6	53.5	56.3	4830.4	16.16	32.51	A2
		9275	3482.4	20.638	1422	247	261.1	275.1	659634.9	4.92	9.91	
93-3955	OZ	172.5	155.72	0.812	60	47.8	50.5	53.2	5175.9	16.65	33.49	B1
		9275.7	3955.4	20.638	1524	233.3	246.6	259.9	706811.4	5.07	10.21	
93-2781	OZ	172.8	109.48	0.75	52	52.8	55.4	58	4492.4	12.91	25.82	A3
		9289.5	2780.8	19.05	1320	257.9	270.6	283.3	613481.4	3.93	7.87	
93-2961	OZ	173.2	116.59	0.875	50	55.4	58.1	60.8	4331	12.65	25.29	B3
		9314.1	2961.4	22.225	1270	270.5	283.7	296.9	591443	3.85	7.71	
93-3714	OZ	173.3	146.21	0.875	56	51	54	56.9	4852.2	16.16	32.51	B2
		9316.7	3713.8	22.225	1422	249.2	263.4	277.6	662605.1	4.92	9.91	
93-2911	OZ	173.3	114.59	0.938	48	57.6	60.4	63.1	4159.7	12.39	24.77	B3
		9318.4	2910.6	23.812	1219	281.4	294.9	308.3	568047.6	3.78	7.55	
94-3612	OZ	174.1	142.21	1	52	55	58	61	4527.8	15.63	31.46	B2
		9362.6	3612.2	25.4	1320	268.4	283	297.6	618308.2	4.76	9.59	
94-3612	OZ	174.1	142.21	1	52	55	58	61	4527.8	15.63	31.46	B2
		9362.6	3612.2	25.4	1320	268.4	283	297.6	618309.1	4.76	9.59	
94-3663	OZ	174.3	144.21	0.938	53	53.1	56.1	59	4707.1	15.89	31.98	B2
		9372.9	3663	23.812	1371	259.3	273.7	288.1	642790.8	4.84	9.75	
94-3432	OZ	174.6	135.1	0.875	53	52.9	55.8	58.7	4714.6	15.89	31.98	A2
		9387.9	3431.6	22.225	1371	258.3	272.6	286.8	643822.9	4.84	9.75	
94-3330	OZ	174.9	131.1	1	50	57	60	63	4372.2	15.37	30.94	A2
		9402.5	3330	25.4	1270	278.2	292.9	307.6	597060.1	4.68	9.43	
94-3330	OZ	174.9	131.1	1	50	57	60	63	4372.2	15.37	30.94	A2
		9402.5	3330	25.4	1270	278.2	292.9	307.6	597060.9	4.68	9.43	
94-2578	OZ	175.1	101.48	1	43	62.8	65.6	68.4	3851.4	11.86	23.72	A3
		9412.1	2577.6	25.4	1117	306.4	320.1	333.8	525946.3	3.62	7.23	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
94-3381	OZ	175.4	133.1	0.938	52	55	58	61	4560.1	15.63	31.46	A2
		9429.4	3380.8	23.812	1320	268.7	283.2	297.6	622717.3	4.76	9.59	
94-2730	OZ	175.6	107.48	0.812	50	55.6	58.3	60.9	4389.1	12.65	25.29	A3
		9439	2730	20.638	1270	271.6	284.6	297.5	599377	3.85	7.71	
95-3622	OZ	176	142.61	0.875	56	51.7	54.4	57.2	4928.4	16.12	32.44	A1
		9463.2	3622.4	22.225	1422	252.3	265.7	279.2	673021.2	4.91	9.89	
95-3854	OZ	176.5	151.72	0.938	56	52	54.8	57.6	4941.4	16.12	32.44	B1
		9488	3853.8	23.812	1422	254.1	267.7	281.4	674789	4.91	9.89	
95-3803	OZ	176.6	149.72	1	53	53.9	56.7	59.6	4767.4	15.86	31.92	B1
		9493	3803	25.4	1371	263.2	277.1	290.9	651032.8	4.83	9.73	
95-3803	OZ	176.6	149.72	1	53	53.9	56.7	59.6	4767.4	15.86	31.92	B1
		9493.1	3803	25.4	1371	263.2	277.1	290.9	651033.9	4.83	9.73	
95-2679	OZ	176.8	105.48	0.875	48	58.2	60.9	63.6	4243.9	12.39	24.77	A3
		9506.9	2679.2	22.225	1219	284.3	297.5	310.6	579538.4	3.78	7.55	
95-3521	OZ	176.8	138.61	1	52	55.7	58.6	61.4	4597.8	15.6	31.4	A1
		9507.5	3520.8	25.4	1320	272	285.9	299.7	627874.9	4.75	9.57	
95-3521	OZ	176.8	138.61	1	52	55.7	58.6	61.4	4597.8	15.6	31.4	A1
		9507.5	3520.8	25.4	1320	272	285.9	299.7	627875.8	4.75	9.57	
95-3572	OZ	177.1	140.61	0.938	53	53.8	56.6	59.4	4780.7	15.86	31.92	A1
		9519.5	3571.6	23.812	1371	262.6	276.2	289.9	652848	4.83	9.73	
95-2882	OZ	177.6	113.48	0.688	56	50.5	53	55.5	4972.8	13.43	26.87	A3
		9548.4	2882.4	17.462	1422	246.6	258.8	271	679079.7	4.09	8.19	
96-3584	OZ	178.1	141.1	0.75	60	48.8	51.6	54.4	5342.4	16.68	33.56	A2
		9574.1	3584	19.05	1524	238.2	251.9	265.5	729546	5.08	10.23	
96-3114	OZ	178.3	122.59	0.75	56	51.1	53.6	56.2	4993.5	13.43	26.87	B3
		9588.2	3113.8	19.05	1422	249.4	261.9	274.4	681909.3	4.09	8.19	
96-2984	OZ	179.5	117.48	0.625	60	47.8	50.2	52.6	5384.2	13.96	27.91	A3
		9649.1	2984	15.875	1524	233.3	245.1	256.9	735264.5	4.25	8.51	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
97-3815	OZ	180.3	150.21	0.812	60	49.6	52.4	55.2	5409.6	16.68	33.56	B2
		9694.6	3815.4	20.638	1524	242	255.8	269.6	738730.6	5.08	10.23	
98-3063	OZ	181.9	120.59	0.812	53	53.8	56.4	59	4910.8	13.17	26.34	B3
		9778.7	3063	20.638	1371	262.7	275.5	288.2	670620	4.01	8.03	
98-3215	OZ	182.2	126.59	0.688	60	48.8	51.3	53.8	5467	13.96	27.91	B3
		9797.5	3215.4	17.462	1524	238.2	250.4	262.5	746572.5	4.25	8.51	
98-2832	OZ	182.6	111.48	0.75	53	53.6	56.2	58.7	4931.2	13.17	26.34	A3
		9819.2	2831.6	19.05	1371	261.7	274.2	286.6	673403.4	4.01	8.03	
99-3724	OZ	183.2	146.61	0.812	60	50.1	52.8	55.5	5497.5	16.65	33.49	A1
		9852.1	3724	20.638	1524	244.8	257.9	271	750730.9	5.07	10.21	
99-2911	OZ	183.8	114.59	1	48	60.9	63.6	66.4	4410.9	12.39	24.77	B3
		9881.1	2910.6	25.4	1219	297.2	310.6	324	602349.8	3.78	7.55	
99-2911	OZ	183.8	114.59	1	48	60.9	63.6	66.4	4410.9	12.39	24.77	B3
		9881.1	2910.6	25.4	1219	297.2	310.6	324	602351	3.78	7.55	
99-3012	OZ	183.9	118.59	0.875	52	56.4	59	61.7	4782.3	12.91	25.82	B3
		9888.9	3012.2	22.225	1320	275.2	288.2	301.1	653060.6	3.93	7.87	
99-2961	OZ	184.5	116.59	0.938	50	58.7	61.4	64.1	4613.7	12.65	25.29	B3
		9921.9	2961.4	23.812	1270	286.7	299.9	313.1	630043	3.85	7.71	
99-3714	OZ	184.7	146.21	0.938	56	54	56.9	59.8	5172.7	16.16	32.51	B2
		9932.1	3713.8	23.812	1422	263.8	278	292.2	706374.3	4.92	9.91	
99-3482	OZ	184.8	137.1	0.875	56	53.8	56.6	59.5	5174.6	16.16	32.51	A2
		9935.8	3482.4	22.225	1422	262.5	276.6	290.6	706634.1	4.92	9.91	
99-3663	OZ	185	144.21	1	53	56	58.9	61.9	4995.3	15.89	31.98	B2
		9946.8	3663	25.4	1371	273.4	287.8	302.2	682148.1	4.84	9.75	
99-3663	OZ	185	144.21	1	53	56	58.9	61.9	4995.3	15.89	31.98	B2
		9946.8	3663	25.4	1371	273.4	287.8	302.2	682149.3	4.84	9.75	
99-3955	OZ	185	155.72	0.875	60	50.8	53.5	56.2	5550.9	16.65	33.49	B1
		9947.8	3955.4	22.225	1524	248	261.3	274.6	758025	5.07	10.21	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in ³ /ft (cm ³ /m)	in (mm)	in (mm)		in (mm)	lb/ft ² (kg/m ²)	
100-2781	OZ	186.1	109.48	0.812	52	56.5	59.1	61.7	4837.6	12.91	25.82	A3
		10003.3	2780.8	20.638	1320	276	288.7	301.3	660619	3.93	7.87	
100-3381	OZ	186.1	133.1	1	52	58.1	61	64	4837.7	15.63	31.46	A2
		10003.5	3380.8	25.4	1320	283.4	297.9	312.4	660628.5	4.76	9.59	
100-3381	OZ	186.1	133.1	1	52	58.1	61	64	4837.7	15.63	31.46	A2
		10003.5	3380.8	25.4	1320	283.4	297.9	312.4	660629.4	4.76	9.59	
100-3432	OZ	186.1	135.1	0.938	53	56	58.9	61.8	5024.5	15.89	31.98	A2
		10004.9	3431.6	23.812	1371	273.4	287.7	301.9	686135.5	4.84	9.75	
101-3854	OZ	187.4	151.72	1	56	54.9	57.7	60.5	5248.1	16.12	32.44	B1
		10077	3853.8	25.4	1422	268	281.7	295.3	716675	4.91	9.89	
101-3622	OZ	187.8	142.61	0.938	56	54.7	57.5	60.2	5257	16.12	32.44	A1
		10094.1	3622.4	23.812	1422	267.1	280.6	294.1	717894.8	4.91	9.89	
101-2730	OZ	187.9	107.48	0.875	50	59.2	61.9	64.5	4698.2	12.65	25.29	A3
		10103.5	2730	22.225	1270	289.2	302.2	315.1	641574.8	3.85	7.71	
101-3572	OZ	188	140.61	1	53	56.7	59.5	62.3	5076.3	15.86	31.92	A1
		10108.1	3571.6	25.4	1371	277.1	290.7	304.4	693212.5	4.83	9.73	
101-3572	OZ	188	140.61	1	53	56.7	59.5	62.3	5076.3	15.86	31.92	A1
		10108.1	3571.6	25.4	1371	277.1	290.7	304.4	693213.7	4.83	9.73	
101-2679	OZ	188.3	105.48	0.938	48	61.7	64.4	67.1	4519	12.39	24.77	A3
		10123.2	2679.2	23.812	1219	301.5	314.6	327.8	617109.3	3.78	7.55	
103-3584	OZ	192	141.1	0.812	60	52.1	54.9	57.7	5758.9	16.68	33.56	A2
		10320.6	3584	20.638	1524	254.4	268.1	281.7	786426.5	5.08	10.23	
103-3114	OZ	192.2	122.59	0.812	56	54.6	57.2	59.8	5381.1	13.43	26.87	B3
		10332.3	3113.8	20.638	1422	266.7	279.3	291.8	734835	4.09	8.19	
104-2882	OZ	192.7	113.48	0.75	56	54.4	56.9	59.4	5394.4	13.43	26.87	A3
		10357.9	2882.4	19.05	1422	265.4	277.6	289.9	736653.2	4.09	8.19	
104-3815	OZ	193.3	150.21	0.875	60	52.7	55.5	58.3	5798.4	16.68	33.56	B2
		10391.4	3815.4	22.225	1524	257.2	271	284.8	791823.3	5.08	10.23	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
105-3063	OZ	194.8	120.59	0.875	53	57.3	59.9	62.5	5260.5	13.17	26.34	B3
		10474.9	3063	22.225	1371	279.7	292.5	305.2	718367.4	4.01	8.03	
105-2961	OZ	195.8	116.59	1	50	62	64.7	67.4	4894.2	12.65	25.29	B3
		10525.1	2961.4	25.4	1270	302.8	316	329.2	668341.5	3.85	7.71	
105-2961	OZ	195.8	116.59	1	50	62	64.7	67.4	4894.2	12.65	25.29	B3
		10525.1	2961.4	25.4	1270	302.8	316	329.2	668342.4	3.85	7.71	
105-3012	OZ	196	118.59	0.938	52	59.8	62.4	65.1	5096.2	12.91	25.82	B3
		10538.1	3012.2	23.812	1320	291.8	304.7	317.7	695936.3	3.93	7.87	
105-3714	OZ	196.1	146.21	1	56	57	59.9	62.8	5491	16.16	32.51	B2
		10543.3	3713.8	25.4	1422	278.2	292.4	306.6	749839.2	4.92	9.91	
106-2984	OZ	196.4	117.48	0.688	60	51.8	54.2	56.6	5891	13.96	27.91	A3
		10557.3	2984	17.462	1524	252.9	264.7	276.5	804466.9	4.25	8.51	
106-3724	OZ	196.5	146.61	0.875	60	53.3	56	58.7	5895.8	16.65	33.49	A1
		10566	3724	22.225	1524	260.3	273.4	286.5	805126.7	5.07	10.21	
106-2832	OZ	196.7	111.48	0.812	53	57.4	59.9	62.5	5312.2	13.17	26.34	A3
		10577.8	2831.6	20.638	1371	280.2	292.6	305.1	725423.5	4.01	8.03	
106-3482	OZ	197	137.1	0.938	56	56.9	59.8	62.7	5516.4	16.16	32.51	A2
		10592.1	3482.4	23.812	1422	278	292	306.1	753311.7	4.92	9.91	
106-3955	OZ	197.5	155.72	0.938	60	53.8	56.5	59.2	5923.5	16.65	33.49	B1
		10615.6	3955.4	23.812	1524	262.6	275.9	289.2	808907.3	5.07	10.21	
106-3432	OZ	197.5	135.1	1	53	59.1	62	64.9	5332.1	15.89	31.98	A2
		10617.5	3431.6	25.4	1371	288.5	302.8	317	728146.8	4.84	9.75	
106-3432	OZ	197.5	135.1	1	53	59.1	62	64.9	5332.1	15.89	31.98	A2
		10617.5	3431.6	25.4	1371	288.5	302.8	317	728148	4.84	9.75	
106-3215	OZ	197.8	126.59	0.75	60	52.5	55	57.5	5934.3	13.96	27.91	B3
		10635	3215.4	19.05	1524	256.3	268.5	280.6	810384.2	4.25	8.51	
107-2781	OZ	199.2	109.48	0.875	52	60.2	62.8	65.4	5180.2	12.91	25.82	A3
		10711.8	2780.8	22.225	1320	294	306.7	319.3	707404.1	3.93	7.87	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
107-3622	OZ	199.4	142.61	1	56	57.8	60.5	63.3	5583.4	16.12	32.44	A1
		10720.7	3622.4	25.4	1422	282	295.4	308.9	762456.4	4.91	9.89	
107-2679	OZ	199.7	105.48	1	48	65.2	67.9	70.6	4791.9	12.39	24.77	A3
		10734.5	2679.2	25.4	1219	318.6	331.7	344.9	654374.1	3.78	7.55	
107-2679	OZ	199.7	105.48	1	48	65.2	67.9	70.6	4791.9	12.39	24.77	A3
		10734.5	2679.2	25.4	1219	318.6	331.7	344.9	654375.5	3.78	7.55	
108-2730	OZ	200.2	107.48	0.938	50	62.8	65.5	68.1	5004.8	12.65	25.29	A3
		10762.9	2730	23.812	1270	306.8	319.7	332.6	683446.6	3.85	7.71	
111-3584	OZ	205.8	141.1	0.875	60	55.4	58.2	61	6172.8	16.68	33.56	A2
		11062.3	3584	22.225	1524	270.6	284.3	297.9	842947.2	5.08	10.23	
111-3114	OZ	205.9	122.59	0.875	56	58.2	60.8	63.3	5766	13.43	26.87	B3
		11071.4	3113.8	22.225	1422	284.1	296.6	309.2	787397.8	4.09	8.19	
111-3815	OZ	206.2	150.21	0.938	60	55.8	58.6	61.4	6184.7	16.68	33.56	B2
		11083.6	3815.4	23.812	1524	272.4	286.2	300	844572.7	5.08	10.23	
112-2882	OZ	207.6	113.48	0.812	56	58.2	60.7	63.2	5813.1	13.43	26.87	A3
		11161.8	2882.4	20.638	1422	284.2	296.4	308.7	793827.8	4.09	8.19	
112-3063	OZ	207.7	120.59	0.938	53	60.8	63.4	66	5607.6	13.17	26.34	B3
		11166.1	3063	23.812	1371	296.7	309.4	322.2	765771.9	4.01	8.03	
112-3012	OZ	208	118.59	1	52	63.1	65.8	68.5	5407.8	12.91	25.82	B3
		11182.4	3012.2	25.4	1320	308.3	321.2	334.2	738486.6	3.93	7.87	
112-3012	OZ	208	118.59	1	52	63.1	65.8	68.5	5407.8	12.91	25.82	B3
		11182.4	3012.2	25.4	1320	308.3	321.2	334.2	738487.6	3.93	7.87	
112-3482	OZ	209.1	137.1	1	56	60.1	63	65.9	5855.8	16.16	32.51	A2
		11243.9	3482.4	25.4	1422	293.4	307.5	321.5	799664.8	4.92	9.91	
113-3724	OZ	209.7	146.61	0.938	60	56.5	59.2	61.9	6291.6	16.65	33.49	A1
		11275.2	3724	23.812	1524	275.9	289	302.1	859170.8	5.07	10.21	
113-3955	OZ	209.8	155.72	1	60	56.8	59.5	62.2	6293.7	16.65	33.49	B1
		11279	3955.4	25.4	1524	277.2	290.5	303.8	859463.5	5.07	10.21	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
113-2832	OZ	210.8	111.48	0.875	53	61.1	63.7	66.2	5690.4	13.17	26.34	A3
		11330.9	2831.6	22.225	1371	298.5	311	323.4	777072.8	4.01	8.03	
114-2781	OZ	212.3	109.48	0.938	52	63.9	66.5	69.1	5520.3	12.91	25.82	A3
		11415	2780.8	23.812	1320	311.9	324.6	337.3	753847.5	3.93	7.87	
114-2730	OZ	212.4	107.48	1	50	66.4	69.1	71.7	5309	12.65	25.29	A3
		11417.2	2730	25.4	1270	324.3	337.2	350.1	724991.4	3.85	7.71	
114-2730	OZ	212.4	107.48	1	50	66.4	69.1	71.7	5309	12.65	25.29	A3
		11417.2	2730	25.4	1270	324.3	337.2	350.1	724992.4	3.85	7.71	
115-2984	OZ	213.2	117.48	0.75	60	55.8	58.2	60.6	6394.5	13.96	27.91	A3
		11459.7	2984	19.05	1524	272.4	284.2	296	873226.9	4.25	8.51	
115-3215	OZ	213.3	126.59	0.812	60	56.2	58.7	61.2	6398.6	13.96	27.91	B3
		11467	3215.4	20.638	1524	274.4	286.5	298.7	873785.3	4.25	8.51	
118-3815	OZ	218.9	150.21	1	60	58.9	61.7	64.5	6568.5	16.68	33.56	B2
		11771.4	3815.4	25.4	1524	287.5	301.3	315.1	896984	5.08	10.23	
118-3584	OZ	219.5	141.1	0.938	60	58.7	61.5	64.3	6584	16.68	33.56	A2
		11799.2	3584	23.812	1524	286.8	300.4	314.1	899102.3	5.08	10.23	
118-3114	OZ	219.6	122.59	0.938	56	61.7	64.3	66.9	6148.3	13.43	26.87	B3
		11805.4	3113.8	23.812	1422	301.4	313.9	326.5	839600.9	4.09	8.19	
119-3063	OZ	220.5	120.59	1	53	64.2	66.8	69.4	5952.3	13.17	26.34	B3
		11852.4	3063	25.4	1371	313.6	326.3	339.1	812838.8	4.01	8.03	
119-3063	OZ	220.5	120.59	1	53	64.2	66.8	69.4	5952.3	13.17	26.34	B3
		11852.4	3063	25.4	1371	313.6	326.3	339.1	812840.1	4.01	8.03	
120-2882	OZ	222.5	113.48	0.875	56	62	64.6	67.1	6228.9	13.43	26.87	A3
		11960.2	2882.4	22.225	1422	302.9	315.2	327.4	850610.3	4.09	8.19	
120-3724	OZ	222.8	146.61	1	60	59.7	62.4	65	6684.8	16.65	33.49	A1
		11979.9	3724	25.4	1524	291.4	304.5	317.6	912868.4	5.07	10.21	
121-2832	OZ	224.7	111.48	0.938	53	64.9	67.4	70	6065.9	13.17	26.34	A3
		12078.6	2831.6	23.812	1371	316.9	329.3	341.8	828351.2	4.01	8.03	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
						in³/ft (cm³/m)	in (mm)	in (mm)		in (mm)	lb/ft² (kg/m²)	
121-2781	OZ	225.3	109.48	1	52	67.6	70.1	72.7	5857.8	12.91	25.82	A3
		12112.9	2780.8	25.4	1320	329.8	342.5	355.2	799938.6	3.93	7.87	
121-2781	OZ	225.3	109.48	1	52	67.6	70.1	72.7	5857.8	12.91	25.82	A3
		12113	2780.8	25.4	1320	329.8	342.5	355.2	799939.8	3.93	7.87	
123-3215	OZ	228.7	126.59	0.875	60	59.9	62.4	64.9	6859.9	13.96	27.91	B3
		12293.8	3215.4	22.225	1524	292.4	304.6	316.7	936785.2	4.25	8.51	
124-2984	OZ	229.8	117.48	0.812	60	59.8	62.2	64.6	6894.8	13.96	27.91	A3
		12356.2	2984	20.638	1524	291.8	303.7	315.5	941544.6	4.25	8.51	
125-3584	OZ	233.1	141.1	1	60	62	64.8	67.6	6992.6	16.68	33.56	A2
		12531.5	3584	25.4	1524	302.9	316.5	330.2	954897.5	5.08	10.23	
125-3114	OZ	233.1	122.59	1	56	65.3	67.8	70.4	6527.9	13.43	26.87	B3
		12534.3	3113.8	25.4	1422	318.7	331.2	343.7	891441.1	4.09	8.19	
128-2882	OZ	237.2	113.48	0.938	56	65.9	68.4	70.9	6641.9	13.43	26.87	A3
		12753.2	2882.4	23.812	1422	321.6	333.9	346.1	907004.3	4.09	8.19	
128-2832	OZ	238.5	111.48	1	53	68.6	71.2	73.7	6438.7	13.17	26.34	A3
		12821	2831.6	25.4	1371	335.1	347.6	360	879264.4	4.01	8.03	
128-2832	OZ	238.5	111.48	1	53	68.6	71.2	73.7	6438.7	13.17	26.34	A3
		12821	2831.6	25.4	1371	335.1	347.6	360	879265.9	4.01	8.03	
131-3215	OZ	243.9	126.59	0.938	60	63.6	66.1	68.6	7318.3	13.96	27.91	B3
		13115.2	3215.4	23.812	1524	310.4	322.6	334.7	999377.7	4.25	8.51	
132-2984	OZ	246.4	117.48	0.875	60	63.8	66.2	68.6	7391.9	13.96	27.91	A3
		13247.1	2984	22.225	1524	311.3	323.1	334.9	1009430	4.25	8.51	
135-2882	OZ	251.9	113.48	1	56	69.7	72.2	74.7	7051.9	13.43	26.87	A3
		13540.6	2882.4	25.4	1422	340.3	352.5	364.7	963006.2	4.09	8.19	
139-3215	OZ	259.1	126.59	1	60	67.3	69.7	72.2	7773.7	13.96	27.91	B3
		13931.4	3215.4	25.4	1524	328.4	340.5	352.7	1061569.1	4.25	8.51	
141-2984	OZ	262.9	117.48	0.938	60	67.7	70.1	72.6	7885.8	13.96	27.91	A3
		14132.2	2984	23.812	1524	330.7	342.5	354.3	1076876.4	4.25	8.51	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.

Section	Solution Type	Section Modulus	Width	Thickness	Pipe Diameter	Weight at Ratio			Moment of Inertia	Coating Area		Configuration
						60%	80%	100%		Front	Front & Back	
		in ³ /ft (cm ³ /m)	in (mm)	in (mm)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	
150-2984	OZ	279.2	117.48	1	60	71.7	74.1	76.5	8376.5	13.96	27.91	A3
		15011.7	2984	25.4	1524	350	361.8	373.6	1143890.5	4.25	8.51	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or OZ-Pile.